

- 本手册所包含内容，本公司拥有最终解释权。
- 本公司工程技术人员将竭诚为您服务，图片与实物若有出入，请以实物为准。
- 未经许可，禁止全部或部份复制。
- 如有变更，届时恕不另行通知，衷心希望本手册能给您带来方便。
- 产品不断研发、技术持续创新.....

- The contents of this manual, the company has the final interpretation.
- The company engineering and technical personnel will be happy to serve you, pictures and in-kind discrepancies, please prevail in kind.
- Reproduction in whole or in part is prohibited without permission.
- If you have any changes, please do not hesitate to contact us. We sincerely hope that this manual will bring you convenience.
- Product development, technology innovation ....

宁波三正塑业有限公司 版权所有 Copyright NINGBO SANZHENG PLASTIC CO.,LTD.

🌿 珍惜资源，善待环境



## 宁波三正塑业有限公司

NINGBO SANZHENG PLASTIC CO.,LTD

### 总公司

地址：浙江省余姚市阳明街道余方路57号

电话：0574-62612167

传真：0574-62199885

网址：www.nbszs.com

邮箱：peter@szsplastic.com

Add:No.57, Yufang Road, Yangming Street,Yuyao,Ningbo,Zhejiang Province,China 315400

Tel:+86-574-62612167

Fax:+86-574-62199885

Website:www.nbszs.com

E-mail:peter@szsplastic.com

NBSZS

□□□□

□□□□

NYLON CABLE TIES

WIRING ACCESSORIES


**NBSZS**<sup>®</sup>  
三正扎带



## 宁波三正塑业有限公司

NINGBO SANZHENG PLASTIC CO.,LTD

www.nbszs.com

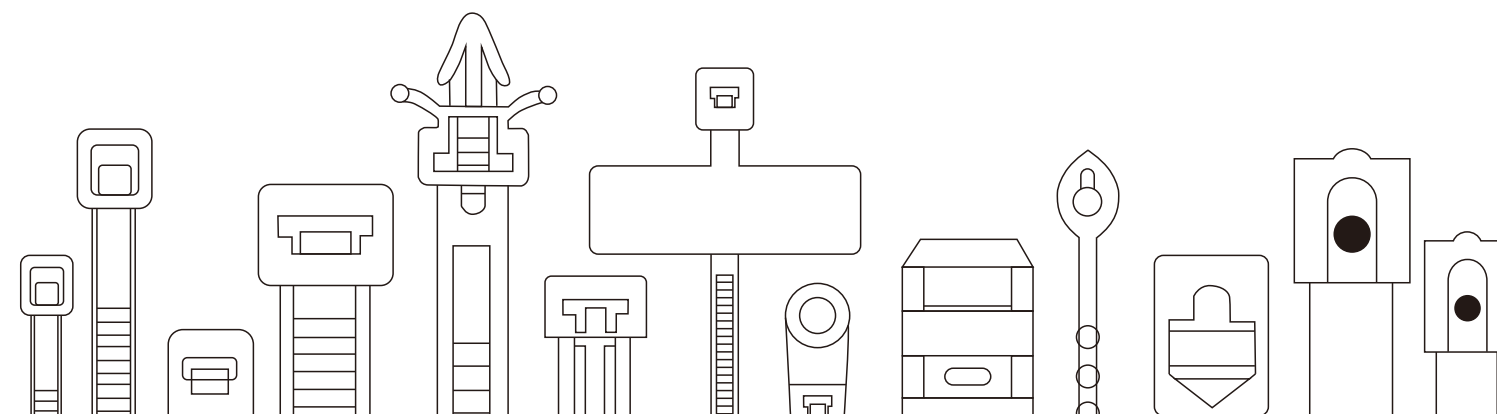

CONVENTIONAL CABLE TIES • SPECIALTY CABLE TIES • CLAMPLING & BUNDLING PRODUCTS • WIRE CONNECTORS



2011  
year

Established

10200  
square

Floor Space

16000  
square

Construction  
Area

5000  
Ton

Annual Output

28+

More Than 28  
International  
Certifications

## 宁波三正塑业有限公司

公司地址: 浙江省余姚市阳明街道余方路57号

创立日期: 2011年5月

占地面积: 10200平方米

## NINGBO SANZHENG PLASTIC CO., LTD.

Address: NO.57, YUFANG ROAD, YANGMING STREET, YUYAO CITY, ZHEJIANG PROVINCE, CHINA

Date of Establishment: May, 2011

Floor Space: 10200m<sup>2</sup>

# 画册目录

CORPORATE PROPAGANDA  
ALBUM DESIGN

[www.nbszs.com](http://www.nbszs.com)

Nylon Cable Ties&All kinds of **cable accessories**



1-2 企业简介  
Company Profile

3-4 设备展示  
Equipment Demonstration

5-6 资质证书  
Qualification Certificate

7-29 扎带系列  
Cable Ties Series

30-31 材料特性  
Material Characteristics

32-36 不锈钢扎带  
Stainless Steel Cable Ties

37-38 扎带工具  
Cable Ties Tools

39-43 线卡系列  
Cable Clips Series

44-47 配线器材系列(固定头)  
Wiring Accessories Series(Cable Glands)

48-52 配线器材系列(线槽)  
Wiring Accessories Series(wiring Duct)

53-64 配线器材(其它)  
Wiring Accessories(others)

65-67 绝缘套管  
Vinyl Wire End Caps

68-72 接线端子系列  
Electrical Connector Series

73-80 快速连接器  
Quick Wire Connectors

81-97 端头  
Cable Lugs

98-100 工具  
Tools



## INTRODUCTION » 企业简介



宁波三正塑业有限公司成立于2011年，是一家专业的配线器材的制造商和出口商。我们的产品主要有各种款式的尼龙扎带、不锈钢扎带、电缆固定头、线卡、膨胀管、热缩管、快速连接器、线夹、定位片、接线端子、压线帽、各款式冷压端头、缠绕管、黄腊管、梅花管、导形管等塑料配线器材。

宁波三正塑业位于浙江省余姚市，紧临中国（余姚）模具城和中国（余姚）塑料城，凭此依托于精湛的模具开发技术和得天独厚的原材料优势，并采用海天、凯迪威等大吨位注塑机生产小克重产品的技术真正做到质优价廉。同时我们毗邻宁波港口，也靠近上海港口。我们的产品远销欧洲、北美、南美、亚洲、中东等超过100个国家，并且和国内一些大型企业也建立了长期的供求关系。

公司始终坚持“重质量、守信用、用户至上”的经营理念，以最好的产品质量，最合理的产品价格真诚的回报新老客户！



**SANZHENG PLASTIC**

Ningbo Sanzheng Plastic Co., Ltd.




Ningbo Sanzheng Plastic Co., Ltd. established in 2011. It is a professional factory on production of "NBSZS" brand of various styles of cable ties, tie wire and cable glands, spiral wrapping bands, PVC silicone fiberglass sleeving, plum tube, expansion pipe, guide tube, R type wire clip, tie mounts, wire connector and all kinds of cold pressing end of plastic wiring equipment.

Sanzheng is an integrative company in R D, manufacturing and sales. The company specifically research and development for children's entertainment flat buckle type nylon cable tie. Sanzheng Plastic Industry is located in Yuyao City Economic Development Zone, close to Chinese (Yuyao) Mold city and Chinese (Yuyao) Plastic city, by virtue of the mold development relying on skilled and richly endowed by nature advantages of raw materials. The Haitian, Katie Wei and other large tonnage injection molding machine production of small weight of product quality and technology truly cheap.

Products sell well in more than 100 countries and 30 provinces, autonomous regions, municipalities directly under the central government and Southeast Asia, Europe, the Americas, Hong Kong, Macao and Taiwan and other regions, and established a long-term supply and demand relationship with some large enterprises at home and abroad.

The company always adhere to the "quality, credit, customer first" business philosophy, with the best product quality, the most reasonable product prices, sincere return of new and old customers!

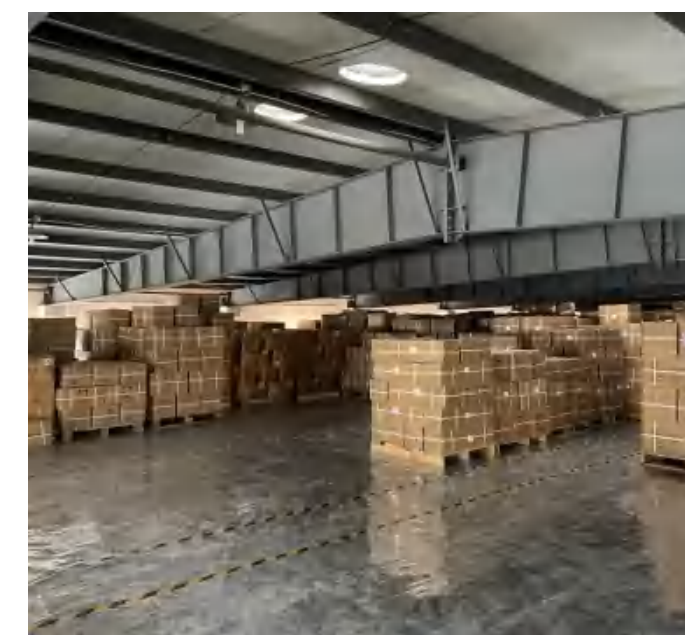



## EQUIPMENT DEMONSTRATION » 设备展示



**高低温实验箱**  
HIGH AND LOW TEMPERATURE TEST CHAMBER

**电动拉力测试机**  
ELECTRIC TENSION TESTER



We have the professional testing room including the testing machines for tensile, insertion force, moisture, high-low temperature. We have team for quality checking for each batch of production, machines and moulds.

**集中供料**  
CENTRAL DRYING AND FEEDING



We have set up the "Central drying and feeding" system for our material drying and transferring to each injection machines.

With this system, the material moisture percent for injection, and the material consistent quality will be guaranteed.



**打包机**  
WRAPPING MACHINE



We have more than 30 CNC machines for production. Our colleagues are familiar with the machines and could keep the machines in the best status of the production and know well of how to maintain the machines.

All of our machines have been applied with the auto-robots for the production, that will give us a safety working environment and the quality of the products will be more stable.


The auto packaging machines which including the function of air-out, water in, and sealing, can bring the cable ties bear the right moisture, and seal the products in good condition.



**封口机**  
SEALING MACHINE



CERTIFICATES  
» 资质证书

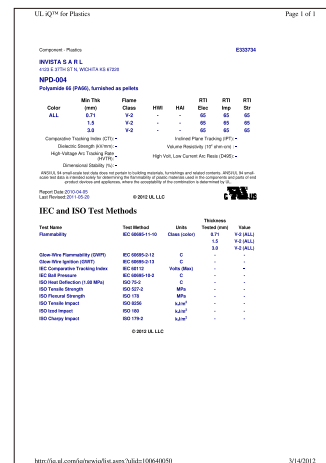



01 One

# CABLE TIES

扎带系列

## Cable Ties

### 自锁式尼龙扎带


- 材质：采用UL认可之尼龙66料制成，防火等级94V-2，耐酸、耐蚀、绝缘性良好，不易老化、承受力强。
- 操作温度：-35℃-85℃。
- 颜色：标准颜色为本色（白色），另有抗紫外线之黑色，特殊颜色欢迎订做。



- \* W=white & natural(白色)
- BR=Brown(棕色)
- OR=Orange(橘色)
- GN=Green(绿色)
- PP=Purple(紫色)
- B=Black(黑色)
- RD=Red(红色)
- YL=Yellow(黄色)
- BL=Blue(蓝色)
- GY=Gray(灰色)

### Self-locking Nylon Cable Ties

- Material: Nylon 66, 94V-2 certificated by UL.Heat-resisting, Acid & erosion control, insulate well and not easy to aging, tensile strong.
- Application temperature: -35℃-85℃.
- Color: Natural(or white, standard color), UV black and other colors are available as requested.

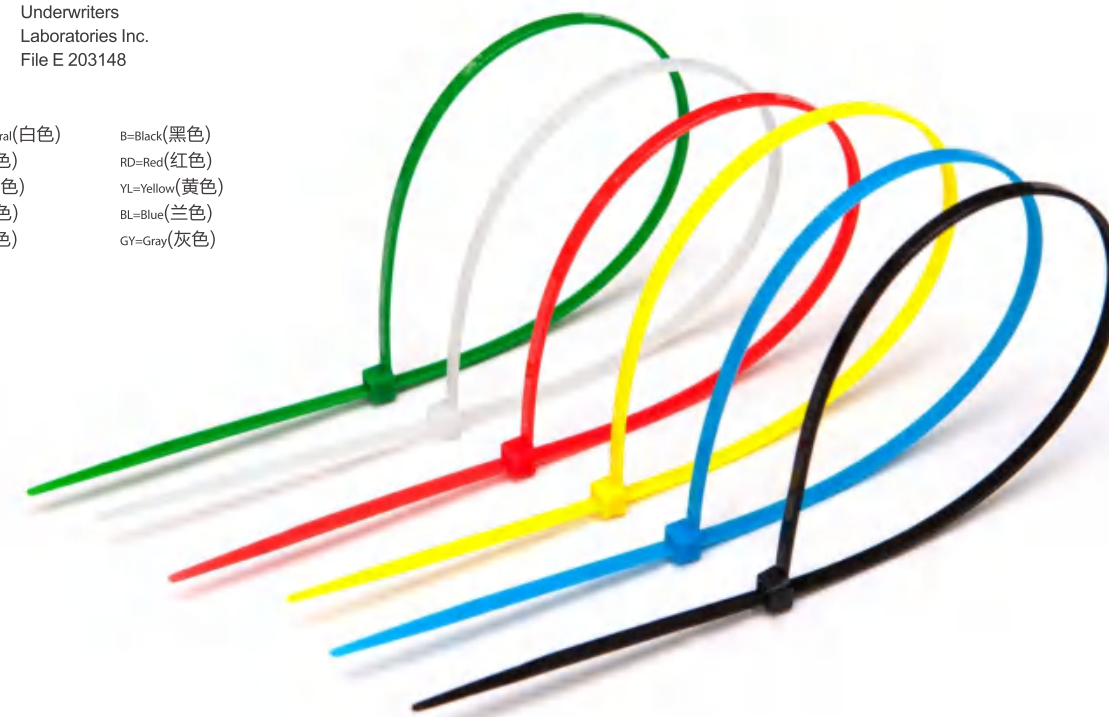

| 编号<br>ITEM.NO. | L(长)    |     | W(宽)<br>(mm) | 捆扎范围<br>Bundle Diameter<br>E(mm) | 拉力<br>Min.Loop Tensile Strength |     |
|----------------|---------|-----|--------------|----------------------------------|---------------------------------|-----|
|                | INCH    | MM  |              |                                  | LBS                             | KGS |
| SZS-3×60       | 2 3/8"  | 60  | 2.5          | 2-11                             | 18                              | 8   |
| SZS-3×80       | 3 3/16" | 80  | 2.5          | 2-16                             | 18                              | 8   |
| SZS-3×90       | 2 5/8"  | 90  | 2.5          | 2-18                             | 18                              | 8   |
| SZS-3×100      | 4"      | 100 | 2.5          | 2-22                             | 18                              | 8   |
| SZS-3×120      | 4 3/4"  | 120 | 2.5          | 2-30                             | 18                              | 8   |
| SZS-3×140      | 5 1/2"  | 140 | 2.5          | 2-33                             | 18                              | 8   |
| SZS-3×150      | 6"      | 150 | 2.5          | 2-35                             | 18                              | 8   |
| SZS-3×160      | 6 1/4"  | 160 | 2.5          | 2-40                             | 18                              | 8   |
| SZS-3×200      | 8"      | 200 | 2.5          | 3-50                             | 18                              | 8   |
| SZS-4×100      | 4"      | 100 | 3.5          | 3-22                             | 40                              | 18  |
| SZS-4×120      | 4 3/4"  | 120 | 3.5          | 3-30                             | 40                              | 18  |
| SZS-4×140      | 5 1/2"  | 140 | 3.5          | 3-33                             | 40                              | 18  |
| SZS-4×150      | 6"      | 150 | 3.5          | 3-35                             | 40                              | 18  |
| SZS-4×180      | 7"      | 180 | 3.5          | 3-42                             | 40                              | 18  |
| SZS-4×200      | 8"      | 200 | 3.5          | 3-50                             | 40                              | 18  |
| SZS-4×220      | 8 5/8"  | 220 | 3.5          | 3-58                             | 40                              | 18  |

| 编号<br>ITEM.NO. | L(长)    |     | W(宽)<br>(mm) | 捆扎范围<br>Bundle Diameter<br>E(mm) | 拉力<br>Min.Loop Tensile Strength |     |
|----------------|---------|-----|--------------|----------------------------------|---------------------------------|-----|
|                | INCH    | MM  |              |                                  | LBS                             | KGS |
| SZS-4×250      | 10"     | 250 | 3.5          | 3-65                             | 40                              | 18  |
| SZS-4×280      | 11"     | 280 | 3.5          | 3-70                             | 40                              | 18  |
| SZS-4×300      | 11 5/8" | 300 | 3.5          | 3-80                             | 40                              | 18  |
| SZS-4×350      | 13 3/4" | 350 | 3.5          | 3-90                             | 40                              | 18  |
| SZS-4×370      | 14 1/2" | 370 | 3.5          | 3-102                            | 40                              | 18  |
| SZS-4×400      | 15 3/4" | 400 | 3.5          | 3-105                            | 40                              | 18  |
| SZS-5×120      | 4 3/4"  | 120 | 4.5          | 3-24                             | 50                              | 22  |
| SZS-5×150      | 6"      | 150 | 4.5          | 3-35                             | 50                              | 22  |
| SZS-5×180      | 7"      | 180 | 4.5          | 3-42                             | 50                              | 22  |
| SZS-5×190      | 7 1/2"  | 190 | 4.5          | 3-46                             | 50                              | 22  |
| SZS-5×200      | 8"      | 200 | 4.5          | 3-50                             | 50                              | 22  |
| SZS-5×250      | 10"     | 250 | 4.5          | 3-65                             | 50                              | 22  |
| SZS-5×280      | 11"     | 280 | 4.5          | 3-70                             | 50                              | 22  |
| SZS-5×300      | 7 8/5"  | 300 | 4.5          | 3-82                             | 50                              | 22  |
| SZS-5×350      | 13 3/4" | 350 | 4.5          | 3-90                             | 50                              | 22  |



Cable Ties



| 编号<br>ITEM.NO. | L(长)      |      | W(宽)<br>(mm) | 捆扎范围<br>Bundle Diameter<br>E(mm) | 拉力<br>Min.loop Tensile Strength |     |
|----------------|-----------|------|--------------|----------------------------------|---------------------------------|-----|
|                | INCH      | MM   |              |                                  | LBS                             | KGS |
| SZS-5×380      | 15"       | 380  | 4.5          | 3-102                            | 50                              | 22  |
| SZS-5×400      | 15 3/4"   | 400  | 4.5          | 3-105                            | 50                              | 22  |
| SZS-5×430      | 17"       | 430  | 4.5          | 3-110                            | 50                              | 22  |
| SZS-5×450      | 17 3/4"   | 450  | 4.5          | 3-130                            | 50                              | 22  |
| SZS-5×500      | 19 11/16" | 500  | 4.5          | 3-150                            | 50                              | 22  |
| SZS-5×550      | 21 1/16"  | 550  | 4.5          | 3-160                            | 50                              | 22  |
| SZS-5×600      | 23 5/8"   | 600  | 4.5          | 3-170                            | 50                              | 22  |
| SZS-5×650      | 25 9/16"  | 600  | 4.5          | 3-190                            | 50                              | 22  |
| SZS-4.8×200    | 8"        | 200  | 4.8          | 3-50                             | 50                              | 22  |
| SZS-4.8×250    | 10"       | 250  | 4.8          | 3-65                             | 50                              | 22  |
| SZS-4.8×280    | 11"       | 280  | 4.8          | 3-70                             | 50                              | 22  |
| SZS-4.8×300    | 7 8/5"    | 300  | 4.8          | 3-82                             | 50                              | 22  |
| SZS-4.8×350    | 13 3/4"   | 350  | 4.8          | 3-90                             | 50                              | 22  |
| SZS-4.8×370    | 14 1/4"   | 370  | 4.8          | 3-95                             | 50                              | 22  |
| SZS-4.8×380    | 15"       | 380  | 4.8          | 3-102                            | 50                              | 22  |
| SZS-4.8×400    | 15 3/4"   | 400  | 4.8          | 3-105                            | 50                              | 22  |
| SZS-4.8×450    | 17 3/4"   | 450  | 4.8          | 3-130                            | 50                              | 22  |
| SZS-4.8×500    | 19 11/16" | 500  | 4.8          | 3-150                            | 50                              | 22  |
| SZS-8×150      | 6"        | 150  | 7            | 3-33                             | 85                              | 38  |
| SZS-8×180      | 7"        | 180  | 6.8          | 3-42                             | 85                              | 38  |
| SZS-8×200      | 8"        | 200  | 6.8          | 3-50                             | 85                              | 38  |
| SZS-8×250      | 10"       | 250  | 7.5          | 4-63                             | 120                             | 55  |
| SZS-8×300      | 11 5/8"   | 300  | 7.5          | 4-82                             | 120                             | 55  |
| SZS-8×350      | 13 3/4"   | 350  | 7.5          | 4-90                             | 120                             | 55  |
| SZS-8×370      | 14 1/4"   | 370  | 7.5          | 4-98                             | 120                             | 55  |
| SZS-8×400      | 15 3/4"   | 400  | 7.5          | 4-105                            | 120                             | 55  |
| SZS-8×450      | 17 3/4"   | 450  | 7.5          | 4-118                            | 120                             | 55  |
| SZS-8×500      | 19 11/16" | 500  | 7.5          | 4-150                            | 120                             | 55  |
| SZS-8×550      | 21 1/16"  | 550  | 7.5          | 4-160                            | 120                             | 55  |
| SZS-8×600      | 23 5/8"   | 600  | 7.5          | 4-170                            | 120                             | 55  |
| SZS-8×650      | 25 9/16"  | 650  | 7.5          | 4-190                            | 120                             | 55  |
| SZS-8×700      | 27 1/2"   | 700  | 7.5          | 4-205                            | 120                             | 55  |
| SZS-8×750      | 29 9/16"  | 750  | 7.5          | 4-220                            | 120                             | 55  |
| SZS-9×400      | 15 3/4"   | 400  | 7.5          | 8-105                            | 120                             | 80  |
| SZS-9×450      | 17 3/4"   | 450  | 9            | 4-118                            | 175                             | 80  |
| SZS-9×500      | 19 11/16" | 500  | 9            | 8-150                            | 175                             | 80  |
| SZS-9×530      | 20 3/4"   | 530  | 9            | 8-155                            | 175                             | 80  |
| SZS-9×550      | 21 1/16"  | 550  | 9            | 8-160                            | 175                             | 80  |
| SZS-9×600      | 23 5/8"   | 600  | 9            | 8-170                            | 175                             | 80  |
| SZS-9×650      | 25 9/16"  | 650  | 9            | 8-190                            | 175                             | 80  |
| SZS-9×700      | 27 1/2"   | 700  | 9            | 10-205                           | 175                             | 80  |
| SZS-9×760      | 30"       | 760  | 9            | 10-225                           | 175                             | 80  |
| SZS-9×800      | 31"       | 800  | 9            | 10-230                           | 175                             | 80  |
| SZS-9×920      | 36 1/4"   | 920  | 9            | 10-265                           | 175                             | 80  |
| SZS-9×1020     | 40 1/6"   | 1020 | 9            | 10-295                           | 175                             | 80  |
| SZS-9×1150     | 45 1/4"   | 1150 | 9            | 10-310                           | 175                             | 80  |
| SZS-9×1220     | 48"       | 1210 | 9            | 10-340                           | 175                             | 80  |
| SZS-9×1350     | 53"       | 1350 | 9            | 10-380                           | 175                             | 80  |
| SZS-9×1550     | 61"       | 1550 | 9            | 10-470                           | 175                             | 80  |
| SZS-10×450     | 17 3/4"   | 450  | 10           | 10-125                           | 200                             | 91  |
| SZS-10×500     | 19 11/16" | 500  | 10           | 12-150                           | 200                             | 91  |
| SZS-12×300     | 11 5/8"   | 300  | 12.7         | 12-82                            | 250                             | 114 |
| SZS-12×400     | 15 3/4"   | 400  | 12.7         | 12-105                           | 250                             | 114 |
| SZS-12×540     | 21 1/4"   | 540  | 12.7         | 14-155                           | 250                             | 114 |
| SZS-12×650     | 25 9/16"  | 650  | 12           | 14-190                           | 250                             | 114 |
| SZS-12×750     | 29 9/16"  | 750  | 12           | 10-220                           | 250                             | 114 |
| SZS-12×780     | 30 3/4"   | 780  | 12.7         | 14-230                           | 250                             | 114 |
| SZS-12×1000    | 39 3/8"   | 1000 | 12           | 14-275                           | 250                             | 114 |
| SZS-13×540     | 21 1/4"   | 540  | 13           | 14-155                           | 250                             | 114 |
| SZS-13×740     | 29 1/7"   | 740  | 13           | 14-216                           | 250                             | 114 |
| SZS-13×780     | 30 3/4    | 780  | 13           | 14-225                           | 250                             | 114 |

Cable Ties(other sizes)



| 编号<br>ITEM.NO. | L(长)      |     | W(宽) | 捆扎范围<br>Bundle Diameter<br>E(mm) | 拉力<br>Min.loop Tensile Strength |     |
|----------------|-----------|-----|------|----------------------------------|---------------------------------|-----|
|                | INCH      | MM  |      |                                  | LBS                             | KGS |
| SZS-1.8×100    | 4"        | 100 | 1.8  | (mm) 2-22                        | 14                              | 6.5 |
| SZS-1.9×120    | 4 3/4"    | 120 | 1.9  | 2-30                             | 14                              | 6.5 |
| SZS-1.9×150    | 6"        | 150 | 1.9  | 2-35                             | 14                              | 6.5 |
| SZS-2.2×60     | 2 3/8"    | 60  | 2.2  | 2-11                             | 18                              | 8   |
| SZS-2.2×80     | 3 3/16"   | 80  | 2.2  | 2-18                             | 18                              | 8   |
| SZS-2.2×100    | 4"        | 100 | 2.2  | 2-22                             | 18                              | 8   |
| SZS-2.2×120    | 4 3/4"    | 120 | 2.2  | 2-30                             | 18                              | 8   |
| SZS-2.2×150    | 6"        | 150 | 2.2  | 2-35                             | 18                              | 8   |
| SZS-2.2×200    | 8"        | 200 | 2.2  | 3-50                             | 18                              | 8   |
| SZS-2.9×150    | 6"        | 150 | 2.9  | 3-35                             | 33                              | 15  |
| SZS-2.9×200    | 8"        | 200 | 2.9  | 3-50                             | 33                              | 15  |
| SZS-2.9×250    | 10"       | 250 | 2.9  | 3-65                             | 33                              | 15  |
| SZS-2.9×300    | 11 5/8"   | 300 | 2.9  | 3-80                             | 33                              | 15  |
| SZS-3.2×150    | 6"        | 150 | 3.2  | 3-35                             | 40                              | 18  |
| SZS-3.2×180    | 7"        | 180 | 3.2  | 3-42                             | 40                              | 18  |
| SZS-3.2×200    | 8"        | 200 | 3.2  | 3-50                             | 40                              | 18  |
| SZS-3.2×250    | 10"       | 250 | 3.2  | 3-65                             | 40                              | 18  |
| SZS-3.2×300    | 11 5/8"   | 300 | 3.2  | 3-80                             | 40                              | 18  |
| SZS-3.7×350    | 13 3/4"   | 350 | 3.7  | 3-90                             | 40                              | 18  |
| SZS-3.7×400    | 15 3/4"   | 400 | 3.7  | 3-105                            | 40                              | 18  |
| SZS-4.2×180    | 7"        | 180 | 4.2  | 3-42                             | 50                              | 22  |
| SZS-4.2×200    | 8"        | 200 | 4.2  | 3-50                             | 50                              | 22  |
| SZS-4.2×250    | 10"       | 250 | 4.2  | 3-65                             | 50                              | 22  |
| SZS-4.2×300    | 11 5/8"   | 300 | 4.2  | 3-80                             | 50                              | 22  |
| SZS-4.2×350    | 13 3/4"   | 350 | 4.2  | 3-90                             | 50                              | 22  |
| SZS-4.2×380    | 15"       | 380 | 4.2  | 3-102                            | 50                              | 22  |
| SZS-4.2×400    | 15 3/4"   | 400 | 4.2  | 3-105                            | 50                              | 22  |
| SZS-5.2×180    | 7"        | 180 | 5.2  | 3-42                             | 65                              | 30  |
| SZS-5.2×200    | 8"        | 200 | 5.2  | 3-50                             | 65                              | 30  |
| SZS-5.2×250    | 10"       | 250 | 5.2  | 3-65                             | 65                              | 30  |
| SZS-5.2×300    | 11 5/8"   | 300 | 5.2  | 3-80                             | 65                              | 30  |
| SZS-5.5×350    | 13 3/4"   | 350 | 5.5  | 3-90                             | 65                              | 30  |
| SZS-5.5×400    | 15 3/4"   | 400 | 5.5  | 3-105                            | 65                              | 30  |
| SZS-5.5×500    | 19 11/16" | 500 | 5.5  | 3-150                            | 65                              | 30  |
| SZS-6.0×270    | 10 5/8"   | 270 | 6    | 4-65                             | 65                              | 30  |
| SZS-6.5×250    | 10"       | 250 | 6.5  | 4-65                             | 85                              | 38  |
| SZS-6.5×300    | 11 5/8"   | 300 | 6.5  | 4-80                             | 85                              | 38  |
| SZS-6.5×350    | 13 3/4"   | 350 | 6.5  | 4-90                             | 85                              | 38  |
| SZS-6.5×400    | 15 3/4"   | 400 | 6.5  | 4-105                            | 85                              | 38  |
| SZS-6.5×450    | 17 3/4"   | 450 | 6.5  | 4-130                            | 85                              | 38  |
| SZS-6.5×500    | 19 11/16" | 500 | 6.5  | 4-150                            | 85                              | 38  |



Cable Ties

NYLON CABLE TIES VALUE PACK


The following value packs are factory suggestions. We support customization.



| 编号<br>ITEM.NO. | 规格<br>SIZE     | 数量<br>Q'ty | 颜色<br>Color | PACKING                                                                   |
|----------------|----------------|------------|-------------|---------------------------------------------------------------------------|
| SZS-150        | 2.5x100mm 4"   | 50PCS      | Red         | PET JAR<br>SIZE:5.5 x H21CM<br>QTY/CTN :56 SETS<br>CTN SIZE :47x41.5x23CM |
|                | 2.5x100mm 4"   | 50PCS      | Yellow      |                                                                           |
|                | 3.5x200mm 8"   | 50PCS      | Blue        |                                                                           |
| SZS-200        | 2.5x100mm 4"   | 50PCS      | White       | PET JAR<br>SIZE:5.5 x H21CM<br>QTY/CTN :56 SETS<br>CTN SIZE :47x41.5x23CM |
|                | 2.5x100mm 4"   | 50PCS      | Black       |                                                                           |
|                | 2.5x150mm 6"   | 50PCS      | Green       |                                                                           |
|                | 3.5x200mm 8"   | 50PCS      | Blue        |                                                                           |
| SZS-250        | 2.5x100mm 4"   | 50PCS      | Red         | PET JAR<br>SIZE:5.5 x H21CM<br>QTY/CTN :56 SETS<br>CTN SIZE :47x41.5x23CM |
|                | 2.5x100mm 4"   | 50PCS      | Yellow      |                                                                           |
|                | 2.5x100mm 4"   | 50PCS      | Blue        |                                                                           |
|                | 2.5x100mm 4"   | 50PCS      | Black       |                                                                           |
| SZS-300        | 2.5x100mm 4"   | 50PCS      | Green       | PET JAR<br>SIZE:8 x H21.5cm<br>QTY/CTN :20 SETS<br>CTN SIZE :42x34x23CM   |
|                | 2.5x100mm 4"   | 50PCS      | Natural     |                                                                           |
|                | 2.5x100mm 4"   | 50PCS      | Red         |                                                                           |
|                | 2.5x100mm 4"   | 50PCS      | Yellow      |                                                                           |
|                | 2.5x100mm 4"   | 50PCS      | Black       |                                                                           |
| SZS-400        | 2.5x100mm 4"   | 50PCS      | Blue        | PET JAR<br>SIZE:11 x H18cm<br>QTY/CTN :16 SETS<br>CTN SIZE :46x46x21CM    |
|                | 2.5x100mm 4"   | 50PCS      | Green       |                                                                           |
|                | 2.5x100mm 4"   | 200PCS     | White       |                                                                           |
|                | 2.5x100mm 4"   | 100PCS     | Black       |                                                                           |
|                | 3.5x200mm 8"   | 50PCS      | White       |                                                                           |
| SZS-401        | 3.5x200mm 8"   | 50PCS      | Black       | TG-100 TIE GUN                                                            |
|                | 2.5x100mm 4"   | 200PCS     | White       |                                                                           |
|                | 2.5x150mm 6"   | 100PCS     | White       |                                                                           |
|                | 3.5x180mm 7.1" | 100PCS     | White       |                                                                           |
|                |                |            | Blue        |                                                                           |

| 编号<br>ITEM.NO. | 规格<br>SIZE     | 数量<br>Q'ty | 颜色<br>Color | PACKING                                                                  |
|----------------|----------------|------------|-------------|--------------------------------------------------------------------------|
| SZS-500        | 2.5x100mm 4"   | 200PCS     | White       | PET JAR<br>SIZE:11 x H18cm<br>QTY/CTN :16 SETS<br>CTN SIZE :46x46x21CM   |
|                | 3.5x140mm 5.5" | 200PCS     | White       |                                                                          |
|                | 4.8x180mm 7.1" | 100PCS     | White       |                                                                          |
| SZS-1000       | 2.5x100mm 4"   | 100PCS     | White       | PET JAR<br>SIZE:11 x H25cm<br>QTY/CTN :20 SETS<br>CTN SIZE :58x48x27.5CM |
|                | 2.5x100mm 4"   | 100PCS     | Yellow      |                                                                          |
|                | 2.5x100mm 4"   | 100PCS     | Blue        |                                                                          |
|                | 2.5x100mm 4"   | 100PCS     | Red         |                                                                          |
|                | 2.5x100mm 4"   | 100PCS     | Black       |                                                                          |
|                | 3.5x150mm 6"   | 100PCS     | Yellow      |                                                                          |
|                | 3.5x150mm 6"   | 100PCS     | Red         |                                                                          |
|                | 3.5x200mm 8"   | 100PCS     | Red         |                                                                          |
|                | 3.5x200mm 8"   | 100PCS     | White       |                                                                          |
|                | 3.5x200mm 8"   | 100PCS     | Black       |                                                                          |
| SZS-200A       | 2.5x100mm 4"   | 100PCS     | White       | Special Packing<br>QTY/CTN :20 SETS<br>CTN SIZE :38x29x24CM              |
|                | 3.5x200mm 8"   | 100PCS     | Black       |                                                                          |
| SZS-200B       | 2.5x100mm 4"   | 100PCS     | White       | Special Packing<br>QTY/CTN :20 SETS<br>CTN SIZE :38x29x24CM              |
|                | 4.8x200mm 8"   | 100PCS     | Black       |                                                                          |
| SZS-600        | 2.5x100mm 4"   | 100PCS     | White       | Special Packing<br>QTY/CTN :16 SETS<br>CTN SIZE :54x30x39CM              |
|                | 2.5x100mm 4"   | 100PCS     | Black       |                                                                          |
|                | 3.5x140mm 5.5" | 50PCS      | Green       |                                                                          |
|                | 3.5x140mm 5.5" | 50PCS      | White       |                                                                          |
|                | 3.5x180mm 7.1" | 50PCS      | Blue        |                                                                          |
|                | 3.5x180mm 7.1" | 50PCS      | White       |                                                                          |
|                | 3.5x200mm 8"   | 50PCS      | Yellow      |                                                                          |
|                | 3.5x200mm 8"   | 50PCS      | White       |                                                                          |
|                | 4.8x230mm 9"   | 50PCS      | Red         |                                                                          |
|                | 4.8x230mm 9"   | 50PCS      | White       |                                                                          |

Cable Ties

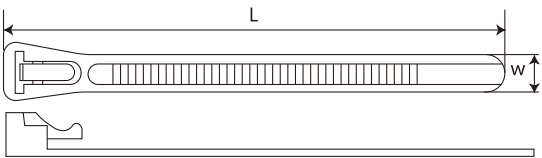

可松式尼龙扎带

- 材质：UL 认可之尼龙66料制成。
- 特点：可以松开重复使用。


Releasable Cable Ties

- Material: made from UL nylon 66.
- Usage: releasable.



可松式尼龙扎带(活用型) Releasable cable ties

| 编号<br>ITEM.NO. | L(长) |      | W(宽)<br>(mm) | 最大捆扎范围<br>Max Bundle Diameter<br>(mm) | 拉力<br>Min.Loop Tensile Strength |      |
|----------------|------|------|--------------|---------------------------------------|---------------------------------|------|
|                | INCH | MM   |              |                                       | LBS                             | KGS  |
| SZS-5*150RT    | 6"   | 150  | 4.5          | 35                                    | 40                              | 18   |
| SZS-5*200RT    | 8"   | 200  | 4.5          | 50                                    | 40                              | 18   |
| SZS-5*250RT    | 10"  | 250  | 4.5          | 65                                    | 40                              | 18   |
| SZS-5*300RT    | 12"  | 300  | 4.5          | 80                                    | 40                              | 18   |
| SZS-7.5*150RT  | 6"   | 150  | 7.5          | 35                                    | 50                              | 22   |
| SZS-7.5*200RT  | 8"   | 200  | 7.5          | 50                                    | 50                              | 22   |
| SZS-7.5*250RT  | 10"  | 250  | 7.5          | 65                                    | 50                              | 22   |
| SZS-7.5*300RT  | 12"  | 300  | 7.5          | 80                                    | 50                              | 22   |
| SZS-7.5*350RT  | 14"  | 350  | 7.5          | 90                                    | 50                              | 22   |
| SZS-7.5*400RT  | 16"  | 400  | 7.5          | 100                                   | 50                              | 22   |
| SZS-7.5*450RT  | 18"  | 450  | 7.5          | 118                                   | 50                              | 22   |
| SZS-7.5*500RT  | 20"  | 500  | 7.5          | 150                                   | 50                              | 22   |
| SZS-7.5*710RT  | 28"  | 710  | 7.5          | 200                                   | 50                              | 22   |
| SZS-10*110RT   | 4.3" | 110  | 9.5          | 22                                    | 85                              | 38.5 |
| SZS-10*1000RT  | 40"  | 1000 | 9.5          | 290                                   | 85                              | 38.5 |
| SZS-10*1200RT  | 47"  | 1200 | 9.5          | 340                                   | 85                              | 38.5 |
| SZS-10*1500RT  | 59"  | 1500 | 9.5          | 460                                   | 85                              | 38.5 |

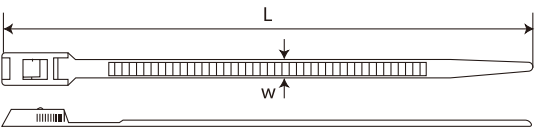


可松式尼龙扎带(反穿型) Releasable cable ties

| 编号<br>ITEM.NO. | L(长)      |     | W(宽)<br>(mm) | 最大捆扎范围<br>Max Bundle Diameter<br>(mm) | 拉力<br>Min.Loop Tensile Strength |     |
|----------------|-----------|-----|--------------|---------------------------------------|---------------------------------|-----|
|                | INCH      | MM  |              |                                       | LBS                             | KGS |
| SZS-350RT      | 13 5/8"   | 350 | 8            | 45                                    | 50                              | 22  |
| SZS-400RT      | 15 3/4"   | 400 | 8            | 105                                   | 50                              | 22  |
| SZS-450RT      | 17 3/4"   | 450 | 8            | 130                                   | 50                              | 22  |
| SZS-500RT      | 19 11/16" | 500 | 9            | 150                                   | 65                              | 30  |
| SZS-550RT      | 21 11/16" | 550 | 9            | 160                                   | 65                              | 30  |
| SZS-10*400     | 15 3/4"   | 400 | 9.5          | 105                                   | 65                              | 30  |
| SZS-10*490     | 19 1/3"   | 490 | 9.5          | 135                                   | 65                              | 30  |






Cable Ties

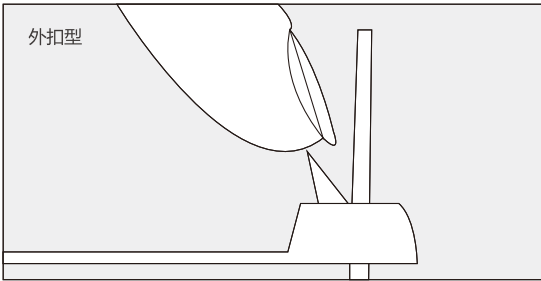


可松式尼龙扎带(外扣型) Releasable cable ties

| 编号<br>ITEM.NO. | L(长) |     | W(宽)<br>(mm) | 最大捆扎范围<br>Max Bundle Diameter<br>(mm) | 拉力<br>Min.Loop Tensile Strength |     |
|----------------|------|-----|--------------|---------------------------------------|---------------------------------|-----|
|                | INCH | MM  |              |                                       | LBS                             | KGS |
| SZS-100RT      | 4"   | 100 | 2.5          | 22                                    | 18                              | 8   |
| SZS-145RT      | 6"   | 150 | 2.5          | 35                                    | 18                              | 8   |
| SZS-150RT      | 6"   | 150 | 3.5          | 35                                    | 40                              | 18  |

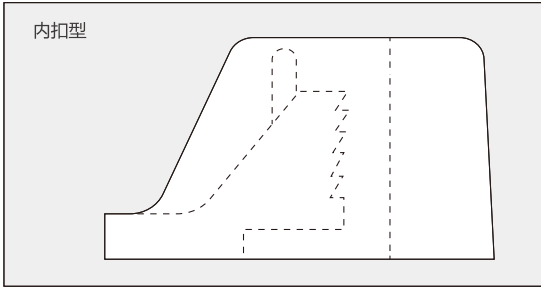

可松式尼龙扎带(内扣型) Releasable cable ties

| 编号<br>ITEM.NO. | L(长)      |     | W(宽)<br>(mm) | 最大捆扎范围<br>Max Bundle Diameter<br>(mm) | 拉力<br>Min.Loop Tensile Strength |     |
|----------------|-----------|-----|--------------|---------------------------------------|---------------------------------|-----|
|                | INCH      | MM  |              |                                       | LBS                             | KGS |
| SZS-300RT      | 11 5/8"   | 300 | 12.7         | 82                                    | 250                             | 114 |
| SZS-400RT      | 15 3/4"   | 400 | 12.7         | 105                                   | 250                             | 114 |
| SZS-450RT      | 17 3/4"   | 450 | 9            | 118                                   | 175                             | 80  |
| SZS-550RT      | 21 3/4"   | 550 | 9            | 160                                   | 175                             | 80  |
| SZS-780RT      | 30 11/16" | 780 | 12.7         | 230                                   | 250                             | 114 |

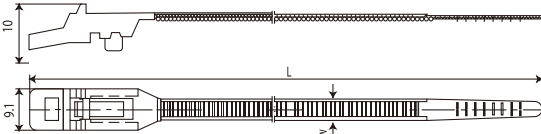

可松式扎带(双孔型)

- 材质：采用UL 认可之尼龙66料制成，防火等级UL94V-2，耐酸、耐蚀、绝缘性能好、不易老化、承受力强。
- 适用温度范围：-40℃—85℃。
- 安装温度范围：-10℃—85℃。
- 颜色：标准颜色为本色、黑色，另有抗紫外线之黑色。特殊颜色欢迎定做。
- 特点：可以松开反复使用。




Releasable Cable Ties

- Material: Polyamide 6.6, 94V-2 certified by UL. Acid & erosion control, insulate well and not easy to aging, tensile strong.
- Application temperature:-40℃-85℃.
- Installation temperature:-10℃-85℃.
- Color: Natural, Black,UV black, other colors are available as requested.
- Features: Can be released for repeated use.

| 编号<br>ITEM.NO. | L(长) | W(宽)<br>(mm) | 捆扎范围<br>Bundle Diameter<br>E(mm) | 拉力<br>Min.Loop Tensile Strength |     |
|----------------|------|--------------|----------------------------------|---------------------------------|-----|
|                |      |              |                                  | LBS                             | KGS |
| SZS-280 RLT    | 280  | 4.8          | 8-60                             | 40                              | 18  |

Cable Ties

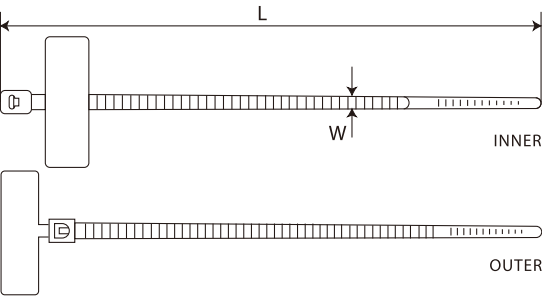


标牌式尼龙扎带

- 材质：采用UL 认可之尼龙66料制成，防火等级UL94V-2，耐酸、耐蚀、绝缘性好、不易老化、承受力强。
- 特点：扎带前端设有空白标牌，可用油性笔在上面标志记号。

Marker Cable Ties

- Material: Nylon 66, 94V-2 certified by UL, not apt to age.
- Feature: It is easy to mark on the space at front tip of ties with oil pen.

| 编号<br>ITEM.NO. | L(长)    |     | W(宽)<br>(mm) | 拉力<br>Min.Loop Tensile Strength |     | 标牌尺寸<br>STICKER SIZE | 备注<br>REMARK       |
|----------------|---------|-----|--------------|---------------------------------|-----|----------------------|--------------------|
|                | INCH    | MM  |              | LBS                             | KGS |                      |                    |
| SZS-3x100MKT   | 4"      | 100 | 2.5          | 18                              | 8   | 25x8                 | 内标<br>INNER MARKER |
| SZS-3x200MKT   | 8"      | 200 | 2.5          | 18                              | 8   | 25x8                 |                    |
| SZS-4x205MKT   | 8"      | 205 | 3.6          | 40                              | 18  | 25x8                 |                    |
| SZS-4x215MKT   | 8 1/2"  | 215 | 3.2          | 40                              | 18  | 25x15                |                    |
| SZS-3x110MKT   | 4 1/3"  | 110 | 2.5          | 18                              | 8   | 21x10                | 外标<br>OUTER MARKER |
| SZS-3x115MKT   | 4 1/2"  | 115 | 2.5          | 18                              | 8   | 27x13                |                    |
| SZS-3x200MKT   | 8"      | 200 | 2.5          | 18                              | 8   | 25x15                |                    |
| SZS-4x150MKT   | 6"      | 150 | 3.6          | 40                              | 18  | 25x15                |                    |
| SZS-4x200MKT   | 8"      | 200 | 3.6          | 40                              | 18  | 25x15                |                    |
| SZS-4x220MKT   | 8 5/8"  | 220 | 3.6          | 40                              | 18  | 25x30                |                    |
| SZS-7x340MKT   | 13 2/5" | 340 | 7            | 85                              | 38  | 50x80                |                    |

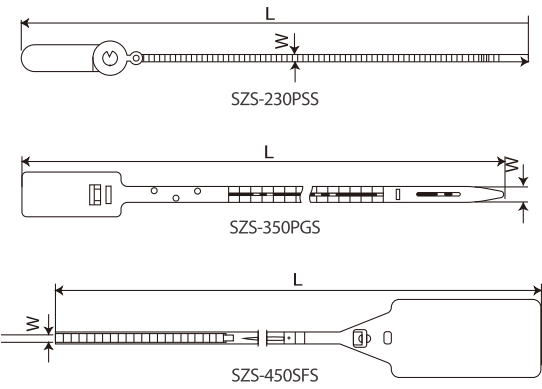

安全条扎带

塑料安全条

- 材质：采用UL 认可之尼龙66料制成，防火等级UL94V-2，耐酸、耐蚀绝缘性好、不易老化、承受力强。
- 适用温度范围：-40℃—85℃。
- 安装温度范围：-10℃—85℃。
- 颜色：标准颜色为本色、黑色，另有抗紫外线之黑色。特殊颜色欢迎定做。
- 特点：金融、航运、电力等行业的保密用途。标牌上可按要求印上名称、商标、日期、流水号等内容。


Plactic Security Seals

- Material: Polyamide 6.6,94V-2 certified by UL.Acid & erosion control,insulate well and not easy to aging. tensile strong.
- Operating temperature: -40℃ - 85℃.
- Installation temperature:-10℃-85℃.
- Color: Natural, Black,UV black, other colors are available asrequested.
- Features: For confidential use in finance, shipping, electric power and other industries.name,trademark,date and serial number can be printed on the sign as required .

| 编号<br>ITEM.NO. | L(长)  |     | W(宽)<br>(mm) | (最大)捆扎范围<br>MAX BUNDLE DIA<br>(mm) | 标牌尺寸<br>Sticker Size(mm) |
|----------------|-------|-----|--------------|------------------------------------|--------------------------|
|                | INCH  | MM  |              |                                    |                          |
| SZS-230PSS     | 9"    | 230 | 3.5          | 42                                 | 12x30                    |
| SZS-350PGS     | 13.8" | 350 | 7.7          | 70                                 | 20x45                    |
| SZS-450SFS     | 17.8" | 450 | 9.3          | 66                                 | 55x106                   |



## Cable Ties



### 珠形尼龙扎带

- 材质: 采用UL合格NYLON66制成, 防火等级94V-2, 不易老化。

#### Bead Ties

- Material: Nylon 66 certificated by UL.

| 编号<br>ITEM.NO. | L(长) |     | 最大捆扎范围<br>Max Bundle Diameter<br>(mm) | 拉力<br>Min.Loop Tensile Strength |     |
|----------------|------|-----|---------------------------------------|---------------------------------|-----|
|                | INCH | MM  |                                       | LBS                             | KGS |
| SZS-100BT      | 4"   | 100 | 20                                    | 11                              | 5   |




### 珠孔形尼龙扎带

- 材质: 采用UL合格NYLON66制成, 防火等级94V-2, 不易老化。
- 用途: 一般电源线之绑扎, 可再松开重复使用。

#### Knot Ties

- Material: Nylon 66 certificated by UL.
- Usage: releasable

| 编号<br>ITEM.NO. | L(长)   |     | 最大捆扎范围<br>Max Bundle Diameter<br>(mm) | 拉力<br>Min.Loop Tensile Strength |     |
|----------------|--------|-----|---------------------------------------|---------------------------------|-----|
|                | INCH   | MM  |                                       | LBS                             | KGS |
| SZS-120KT      | 4 3/4" | 120 | 25                                    | 18                              | 8   |
| SZS-150KT      | 6"     | 150 | 35                                    | 18                              | 8   |
| SZS-180KT      | 7"     | 180 | 45                                    | 18                              | 8   |

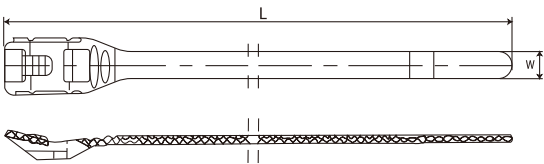

### 平扣式扎带


- 材质: 采用UL认可之尼龙66料制成, 防火等级UL94V-2, 耐酸、耐蚀绝缘性能好、不易老化、承受力强。
- 适用温度范围: -40℃-85℃。
- 安装温度范围: -10℃-85℃。
- 颜色: 标准颜色为本色、黑色, 另有抗紫外线之黑色。特殊颜色欢迎定做。

#### In-line cable ties

- Material: Polyamide 6.6,94V-2 certificated by UL . Acid & erosion control, insulate well and not easy to aging, tensile strong
- Application temperature: -40℃-85℃.
- Installation temperature: -10℃-85℃.
- Color: Natural, Black, UV black, other colors are available as requested.

| 编号<br>ITEM.NO. | L(长) |     | W(宽)<br>(mm) | 捆扎范围<br>Bundle Diameter<br>E(mm) | 拉力<br>Min.Loop Tensile Strength |     |
|----------------|------|-----|--------------|----------------------------------|---------------------------------|-----|
|                | INCH | MM  |              |                                  | LBS                             | KGS |
| SZS-200PT      | 8"   | 200 | 4.5          | 8-45                             | 50                              | 22  |
| SZS-280PT      | 11"  | 280 | 4.5          | 8-65                             | 50                              | 22  |

## Cable Ties



### 双扣式尼龙扎带

- 材质:采用UL认可之尼龙66或尼龙12料制成, 防火等级UL94V-2, 耐酸、耐蚀、绝缘性能好、不易老化、承受力强。
- 适用温度范围: -40℃-85℃(PA66), -40℃-65℃(PA12)。
- 安装温度范围: -10℃-85℃(PA66), -10℃-65℃(PA12)。
- 颜色: 黑色, 另有抗紫外线之黑色。
- 特点: 拉力更强, 不易脱扣。

#### Double Locking Cable Ties

- Material: Polyamide 6.6 or Polyamide 12, 94V-2 certificated by UL. Acid & erosion control, insulate well and not easy to aging,tensile strong.
- Application temperature: -40℃-85℃(PA66), -40℃-65℃(PA12).
- Installation temperature: -10℃-85℃(PA66), -10℃-65℃(PA12).
- Color: Black, UV black
- Features: Tensile strong and not easy to trip.

| 编号<br>ITEM.NO. | L(长)    |     | W(宽)<br>(mm) | (最大)捆扎范围<br>MAX BUNDLE DIA<br>(mm) | 拉力<br>Min.Loop Tensile Strength |     | 备注<br>REMARK      |
|----------------|---------|-----|--------------|------------------------------------|---------------------------------|-----|-------------------|
|                | INCH    | MM  |              |                                    | LBS                             | KGS |                   |
| SZS-115DL      | 5 1/8"  | 115 | 6            | 22                                 | 77                              | 35  | 单扣<br>single lock |
| SZS-180DL      | 7"      | 180 | 6            | 45                                 | 77                              | 35  |                   |
| SZS-180DDL     | 7"      | 180 | 9            | 45                                 | 88                              | 40  | 双扣<br>double lock |
| SZS-260DDL     | 10 1/4" | 260 | 9            | 66                                 | 110                             | 50  |                   |
| SZS-300DDL     | 12"     | 300 | 9            | 80                                 | 120                             | 54  |                   |
| SZS-350DDL     | 13 5/8" | 350 | 9            | 90                                 | 110                             | 50  |                   |
| SZS-510DDL     | 20"     | 510 | 9            | 140                                | 120                             | 54  |                   |
| SZS-760DDL     | 30"     | 760 | 9            | 220                                | 120                             | 54  |                   |



### 双孔扎带

- 材质: 采用UL认可之尼龙66料制成, 防火等级UL94V-2, 耐酸、耐蚀绝缘性能好、不易老化、承受力强。
- 适用温度范围: -40℃-85℃。
- 安装温度范围: -10℃-85℃。
- 颜色: 标准颜色为本色、黑色, 另有抗紫外线之黑色。特殊颜色欢迎定做。

#### Double Loop Cable Ties


- Material: Polyamide 6.6, 94V-2 certificated by UL. Acid & erosion control, insulate well and not easy to aging, tensile strong
- Application temperature:- 40℃-85℃.
- Installation temperature: -10℃-85℃.
- Color: Natural, Black, UV black, other colors are available as requested.

| 编号<br>ITEM.NO. | L(长)     |     | W(宽)<br>(mm) | D1(最大)捆扎范围<br>D1MAX BUNDLE DIA<br>(mm) | D2(最大)捆扎范围<br>D2MAX BUNDLE DIA<br>(mm) | 最小拉力<br>Min.Loop Tensile Strength |     |
|----------------|----------|-----|--------------|----------------------------------------|----------------------------------------|-----------------------------------|-----|
|                | INCH     | MM  |              |                                        |                                        | LBS                               | KGS |
| SZS-200DLT     | 8"       | 200 | 4.8          | 50                                     | 45                                     | 50                                | 22  |
| SZS-225DLT     | 8 7/8"   | 225 | 4.8          | 59                                     | 52                                     | 50                                | 22  |
| SZS-250DLT     | 10"      | 250 | 4.8          | 63                                     | 55                                     | 50                                | 22  |
| SZS-300DLT     | 11 5/8"  | 300 | 4.8          | 80                                     | 70                                     | 50                                | 22  |
| SZS-370DLT     | 14 9/16" | 370 | 4.8          | 105                                    | 98                                     | 50                                | 22  |





## Cable Ties

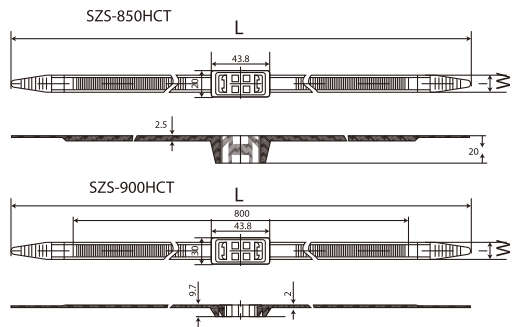


### 手铐式扎带

- 材质：采用UL认可之尼龙66料制成，防火等级UL94V-2，耐酸、耐蚀、绝缘性能好、不易老化、承受力强。
- 适用温度范围：-40℃-85℃。

#### Handcuffs Ties

- Material: Polyamide 6.6, 94V-2 certificated by UL. Acid & erosion control, insulate well and noteasyto aging,tensile strong.
- Applicationtemperature:-40℃-85℃.

| 编号<br>ITEM.NO. | L(长)  |     | W(宽)<br>(mm) | (最大)捆扎范围<br>MAX BUNDLE DIA<br>(mm) | 最小拉力<br>Min.Loop Tensile Strength |     |
|----------------|-------|-----|--------------|------------------------------------|-----------------------------------|-----|
|                | INCH  | MM  |              |                                    | LBS                               | KGS |
| SZS-850HCT     | 33.5" | 850 | 7.0          | 90                                 | 85                                | 38  |
| SZS-900HCT     | 35.5" | 900 | 13.0         | 98                                 | 250                               | 114 |
| SZS-500HCT     | 19.7" | 500 | 12           | 58                                 | 220                               | 103 |
| SZS-700HCT     | 27.5" | 700 | 12           | 80                                 | 220                               | 103 |



### 固定头式尼龙扎带

- 材质：UL 认可之尼龙66料制成。
- 特点：扎带捆孔电线后，将整束电线用螺钉固定在基板上。


#### Mountable Head Cable Ties

- Material: Nylon 66 certificated by UL.
- Usage: after bundling wires, fix them on plate with screw.



| 编号<br>ITEM.NO. | L(长)   |     | W(宽)<br>(mm) | (最大)捆扎范围<br>MAX BUNDLE DIA<br>(mm) | 最小拉力<br>Min.Loop Tensile Strength |      |
|----------------|--------|-----|--------------|------------------------------------|-----------------------------------|------|
|                | INCH   | MM  |              |                                    | LBS                               | KGS  |
| SZS-4X100MT    | 4"     | 100 | 3.6          | 22                                 | 18                                | 8    |
| SZS-4X110MT    | 4 1/3" | 110 | 3.6          | 22                                 | 18                                | 8    |
| SZS-4X150MT    | 6"     | 145 | 3.6          | 32                                 | 30                                | 13.6 |
| SZS-4X200MT    | 8"     | 200 | 3.6          | 42                                 | 30                                | 13.6 |
| SZS-5X220MT    | 8 5/8" | 220 | 4.3          | 42                                 | 50                                | 22   |
| SZS-5X300MT    | 12"    | 300 | 4.5          | 80                                 | 50                                | 22   |
| SZS-5X400MT    | 16"    | 400 | 4.5          | 100                                | 50                                | 22   |
| SZS-8X300MT    | 12"    | 300 | 7.6          | 80                                 | 120                               | 55   |
| SZS-8X380MT    | 15"    | 380 | 7.6          | 98                                 | 120                               | 55   |
| SZS-8X400MT    | 16"    | 400 | 7.6          | 109                                | 120                               | 55   |

## Cable Ties

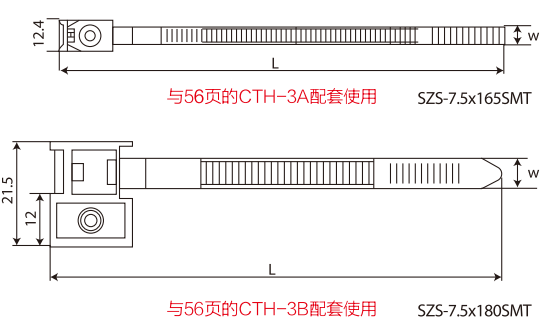


### 固定锁式尼龙扎带

- 材质：采用UL认可之尼龙66料制成，防火等级UL94V-2，耐酸、耐蚀、绝缘性能好、不易老化、承受力强。
- 适用温度范围：-40℃—85℃。
- 安装温度范围：-10℃—85℃。
- 颜色：标准颜色为本色、黑色，另有抗紫外线之黑色。特殊颜色欢迎定做。

#### Saddle Mounting Cable Ties

- Material: Nylon 6.6, 94V-2 certificated by UL. Acid & erosioncontrol, insulate well and not easy to aging, tensile strong.
- Application temperature: -40℃-85℃.
- Installation temperature: -10℃-85℃.
- Color: Natural, Black,UV black, other colors are available as requested.

| 编号<br>ITEM.NO. | L(长)     |     | W(宽)<br>(mm) | (最大)捆扎范围<br>MAX BUNDLE DIA<br>(mm) | 拉力<br>Min.Loop Tensile Strength |     |
|----------------|----------|-----|--------------|------------------------------------|---------------------------------|-----|
|                | INCH     | MM  |              |                                    | LBS                             | KGS |
| SZS-165SMT     | 6 1/2"   | 165 | 7.5          | 33                                 | 50                              | 22  |
| SZS-170SMT     | 6 11/16" | 170 | 7.5          | 35                                 | 50                              | 22  |
| SZS-180SMT     | 7"       | 180 | 7.5          | 38                                 | 50                              | 22  |
| SZS-230SMT     | 9 1/6"   | 230 | 7.5          | 55                                 | 50                              | 22  |
| SZS-285SMT     | 11 7/32" | 285 | 7.5          | 65                                 | 50                              | 22  |

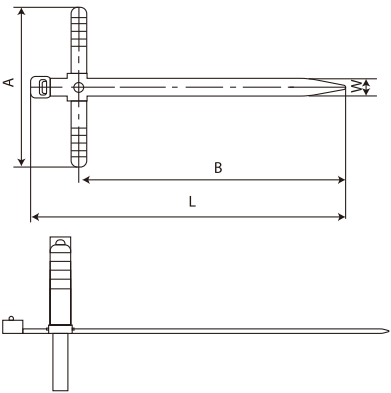

### 膨胀管式扎带

- 材质：采用UL认可之尼龙66料制成，防火等级UL94V-2，耐酸、耐蚀绝缘性好、不易老化、承受力强。
- 适用温度范围：-40℃—85℃。
- 安装温度范围：-10℃—85℃。
- 颜色：标准颜色为本色、黑色，另有抗紫外线之黑色。特殊颜色欢迎定做。
- 使用方法:可直接将头部膨胀管嵌入墙体，使用方便。

#### Expand Plug Cable ties


- Material: Polyamide 6.6,94V-2 certificated by UL. Acid & erosion control, insulate well and not easy to aging, tensile strong.
- Application temperature:-40℃-85℃.
- Installation temperature:-10℃-85℃.
- Color: Natural, Black, UV black, other colors are available asrequested.
- Usage: Can insert the head (Expand plug) into wall, easy to use.



| 编号<br>ITEM.NO. | L(长) |     | W(宽)<br>(mm) | A(mm) | B(mm) | (最大)捆扎范围<br>MAX BUNDLE DIA<br>(mm) | 最小拉力<br>Min.Loop Tensile Strength |     |
|----------------|------|-----|--------------|-------|-------|------------------------------------|-----------------------------------|-----|
|                | INCH | MM  |              |       |       |                                    | LBS                               | KGS |
| SZS-150EP      | 6"   | 150 | 7.0          | 79    | 128   | 35                                 | 85                                | 38  |



Cable Ties

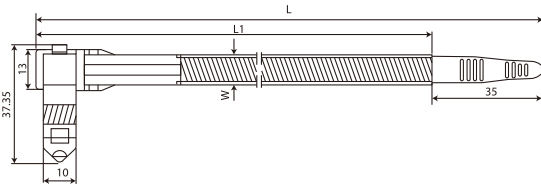


卡扣式扎带

- 材质：采用UL认可之尼龙12料制成，防火等级UL94V-2，耐酸、耐蚀绝缘性能好、不易老化、承受力强。
- 适用温度范围：-40℃—65℃。
- 安装温度范围：-10℃—65℃。
- 颜色：黑色、乳白色、另有抗紫外线之黑色。
- 特点：拉力更强，不易脱扣。

Buckle Cable Ties

- Material: Polyamide 12,94V-2 certificated by UL. Acid & erosion control, insulate well and not easy to aging, tensile strong.
- Application temperature:-40℃-65℃ .
- Installation temperature:-10℃-65℃.
- Color: Black,Milk white,UV black.
- Features: Tensile strong and not easy to trip.

| 编号<br>ITEM.NO. | L(长)<br>(mm) | L1<br>(mm) | W(宽)<br>(mm) | (最大)捆扎范围<br>MAX BUNDLE DIA<br>(mm) | 最小拉力<br>Min.Loap Tensile Strength |     |
|----------------|--------------|------------|--------------|------------------------------------|-----------------------------------|-----|
|                |              |            |              |                                    | LBS                               | KGS |
| SZS-158BCT     | 193          | 158        | 9            | 35                                 | 175                               | 80  |
| SZS-173BCT     | 208          | 173        | 9            | 40                                 | 175                               | 80  |
| SZS-215BCT     | 250          | 215        | 9            | 52                                 | 175                               | 80  |
| SZS-251BCT     | 286          | 251        | 9            | 63                                 | 175                               | 80  |
| SZS-341BCT     | 376          | 341        | 9            | 85                                 | 175                               | 80  |

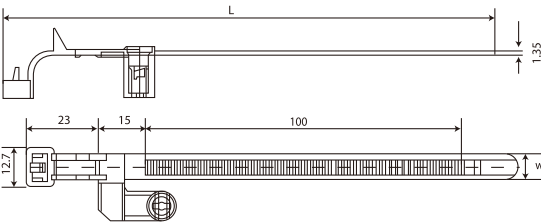

固定座扎带

- 材质：采用UL认可之尼龙66料制成，防火等级UL94V-2，耐酸、耐蚀、绝缘性能好、不易老化、承受力强。
- 适用温度范围：-40℃— 85℃。
- 安装温度范围：-10℃— 85℃。
- 颜色：标准颜色为本色、黑色、另有抗紫外线之黑色，特殊颜色欢迎定做。


Holder Cable Ties

- Material: Nylon 6.6, 94V-2 certificated by UL. Acid & erosion control,insulate well and not easy to aging, tensile strong.
- Application temperature:-40℃- 85℃ .
- Installation temperature:-10℃- 85℃.
- Color: Natural, Black, UV black, other colors are available as requested.



| 编号<br>ITEM.NO. | L(长)<br>(mm) | W(宽)<br>(mm) | (最大)捆扎范围<br>MAX BUNDLE DIA<br>(mm) | 拉力<br>Min.Loap Tensile Strength |     |
|----------------|--------------|--------------|------------------------------------|---------------------------------|-----|
|                |              |              |                                    | LBS                             | KGS |
| SZS-155HT      | 155          | 8            | 30                                 | 40                              | 18  |

Cable Ties

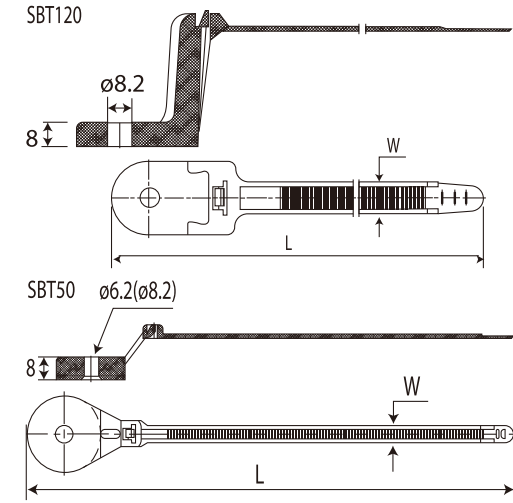


螺栓扎带

- 材质：采用UL认可之尼龙耐热性材料制成。
- 适用温度范围：-40℃—105℃。
- 特点：只须将头部安装在螺栓上，用螺母固定，强耐震的结构，在户外及高温环境下也可以使用。

Cedar Type Tie Holder

- Material: Heat stabilized(PA66HS).
- Application temperature:-40℃-105℃.
- Features: It is only necessary to install the head on a bolt and fix it with a nut. It is a strong shock resistant structure, which can also be used in outdoor and high-temperature environments.

| 编号<br>ITEM.NO. | L(长)    |     | W(宽)<br>(mm) | (最大)捆扎范围<br>MAX BUNDLE DIA<br>(mm) | 最小拉力<br>Min.Loap Tensile Strength |     | 孔径(Ø)<br>Hole Dia. | 适用螺丝<br>Screws |
|----------------|---------|-----|--------------|------------------------------------|-----------------------------------|-----|--------------------|----------------|
|                | INCH    | MM  |              |                                    | LBS                               | KGS |                    |                |
| SBT50-M6       | 7.1/10" | 180 | 6            | 35                                 | 50                                | 22  | 6.2                | M6             |
| SBT50-M8       | 7.1/10" | 180 | 6            | 35                                 | 50                                | 22  | 8.2                | M8             |
| SBT120-M8      | 12"     | 300 | 13           | 60                                 | 120                               | 55  | 8.2                | M8             |

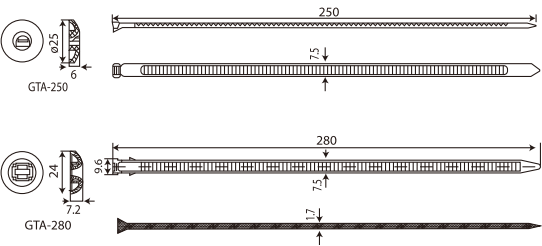

基板固定扎带

- 产品说明：两件式设计，带扣与带身装配成组出货。施工省力。特殊带扣设计，在完全束紧前可将束带松开。
- 材质：采用UL认可之尼龙66料制成，防火等级94V-2，耐酸、耐蚀、绝缘性良好，不易老化、承受力强。


Chassis Cable Ties

- Description: Two-piece design, buckle and strap are one assembly. Zero insertion force. First loop is releasable prior to final tension.
- Material: Nylon 66, 94V-2 certificated by UL. Heat-resisting, Acid & erosion control, insulate well and not apt to age.

| 编号<br>ITEM.NO. | L(长)<br>(mm) | W(宽)<br>(mm) | (最大)捆扎范围<br>MAX BUNDLE DIA<br>(mm) | 最小拉力<br>Min.Loap Tensile Strength |     | 备注<br>Remark |
|----------------|--------------|--------------|------------------------------------|-----------------------------------|-----|--------------|
|                |              |              |                                    | LBS                               | KGS |              |
| GTA-250        | 250          | 7.5          | 60                                 | 120                               | 55  | Single Tooth |
| GTA-280        | 280          | 7.5          | 65                                 | 130                               | 60  | double Tooth |
| GTA-380        | 380          | 7.5          | 100                                | 130                               | 60  | double Tooth |



## Cable Ties

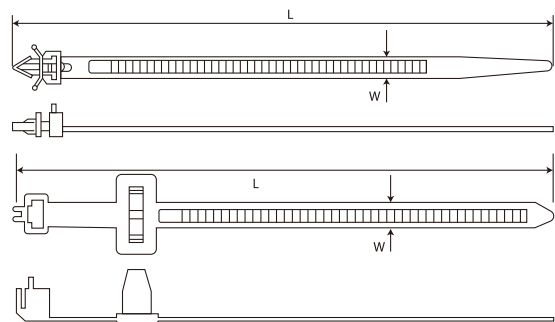

## 插销式尼龙扎带

- 材质：材质:采用UL认可之尼龙66料或尼龙耐热性材料制成，防火等级UL94V-2，耐酸、耐蚀、绝缘性能好、不易老化、承受力强。
- 适用温度范围：-40℃-85℃(尼龙66) -40℃-105℃(尼龙耐热性材料)。
- 安装温度范围：-40℃-85℃(尼龙66) -40℃-105℃(尼龙耐热性材料)。
- 特点：头部翼状支撑，张开固定，可实现在机板面上的稳定安装。

## Push Mount Cable Ties


- Material: Polyamide 6.6 or heat stabilized (PA66HS), 94V-2 certificated by UL. Acid & erosion control,insulate well and not easy to aging, tensile strong.
- Application temperature: -40 °C-85 °C(PA66), 40°C-105°C(PA66HS).
- Installation temperature: -40°C-85°C(PA66), 40°C-105°C(PA66HS).
- Features: The head is supported in the shape of a wing, which is open and fixed to achieve stable installation on the board.

## 插销式尼龙扎带（可退型） Push Mount Ties(releasable)


| 编号<br>ITEM.NO. | L(长)    |     | W(宽)<br>(mm) | (最大)捆扎范围<br>MAX BUNDLE DIA<br>(mm) | 最小拉力<br>Min.Loap Tensile Strength |     | 孔径(Ø)<br>Hole Dia. |     | 适用螺丝<br>Screws |     |
|----------------|---------|-----|--------------|------------------------------------|-----------------------------------|-----|--------------------|-----|----------------|-----|
|                | INCH    | MM  |              |                                    | LBS                               | KGS | INCH               | MM  | INCH           | MM  |
| SZS-150PT      | 6"      | 150 | 8            | 37                                 | 40                                | 18  | 0.252              | 6.4 | 0.126          | 3.2 |
| SZS-175PT      | 6 5/16" | 175 | 8            | 44                                 | 40                                | 18  | 0.252              | 6.4 | 0.126          | 3.2 |
| SZS-165PT      | 6 1/2"  | 165 | 8            | 38                                 | 40                                | 18  | 0.394              | 10  | 0.126          | 3.2 |

## 插销式尼龙扎带 Push Mount Ties

| 编号<br>ITEM.NO. | L(长)   |     | W(宽)<br>(mm) | (最大)捆扎范围<br>MAX BUNDLE DIA<br>(mm) | 拉力<br>Tensile Strength |      | 孔径(Ø)<br>Hole Dia. |     | 机板厚度<br>Panel Thickness |     |
|----------------|--------|-----|--------------|------------------------------------|------------------------|------|--------------------|-----|-------------------------|-----|
|                | INCH   | MM  |              |                                    | LBS                    | KGS  | INCH               | MM  | INCH                    | MM  |
| SZS-2.5x100PT  | 4"     | 100 | 2.5          | 22                                 | 18                     | 8    | 0.189              | 4.8 | 0.094                   | 2.4 |
| SZS-3.2x120PT  | 4 3/4" | 120 | 3.2          | 25                                 | 30                     | 13.6 | 0.157              | 4   | 0.079                   | 2   |
| SZS-4.8x120PT  | 4 3/4" | 120 | 4.8          | 25                                 | 50                     | 22   | 0.252              | 6.4 | 0.126                   | 3.2 |
| SZS-3.5x123PT  | 4 4/5" | 123 | 3.5          | 26                                 | 40                     | 18   | 0.157              | 4   | 0.079                   | 2   |
| SZS-4.8x160PT  | 6 1/4" | 160 | 4.8          | 38                                 | 50                     | 22   | 0.252              | 6.4 | 0.126                   | 3.2 |
| SZS-4.8x190PT  | 7 1/2" | 190 | 4.8          | 45                                 | 50                     | 22   | 0.252              | 6.4 | 0.126                   | 3.2 |

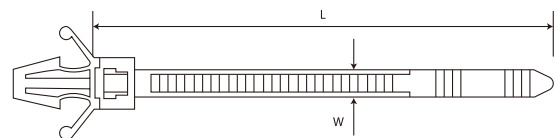

## Cable Ties

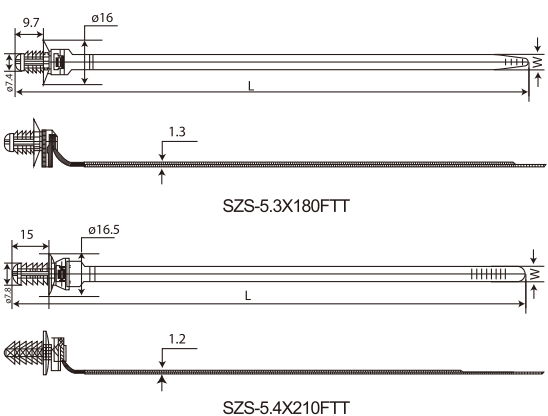


## 杉树型固定扎带

- 材质：采用UL认可之尼龙66料或尼龙耐热性材料制成，防火等级UL94V-2，耐酸、耐蚀、绝缘性能好、不易老化、承受力强。
- 适用温度范围：-40℃-85℃(尼龙66) -40℃-105℃(尼龙耐热性材料)。
- 安装温度范围：-10℃-85℃(尼龙66) -10℃-105℃(尼龙耐热性材料)。
- 特点：固定头成杉树状，可用于各种面板厚度，能最大限度减少灰尘、污垢和水的进入。

## Fire Tree Cable Ties

- Material: Polyamide 6.6 or heat stabilized(PA66HS), 94V-2 certificated by UL. Acid & erosion control, insulate well and not easy to aging, tensile strong.
- Application temperature: -40°C-85°C(PA66), -40°C-105°C(PA66HS).
- Installation temperature: -10°C-85°C(PA66), -10°C-105°C(PA66HS).
- Features: The fixed head is in the shape of a fir tree, which can be used for various panel thicknesses to minimize the entry of dust, dirt, and water.

| 编号<br>ITEM.NO. | L(长)    |     | W(宽)<br>(mm) | (最大)捆扎范围<br>MAX BUNDLE DIA<br>(mm) | 最小拉力<br>Min.Loap Tensile Strength |     | 孔径(Ø)<br>Hole Dia. | 机板厚度<br>Panel Thickness |
|----------------|---------|-----|--------------|------------------------------------|-----------------------------------|-----|--------------------|-------------------------|
|                | INCH    | MM  |              |                                    | LBS                               | KGS | MM                 | MM                      |
| SZS-5.3x180FTT | 7.1/10" | 180 | 5.3          | 30                                 | 40                                | 18  | 6.5-7              | 0.6-4.5                 |
| SZS-5.4x210FTT | 8.1/4"  | 210 | 5.4          | 48                                 | 40                                | 18  | 6.5-7.2            | 1-8                     |

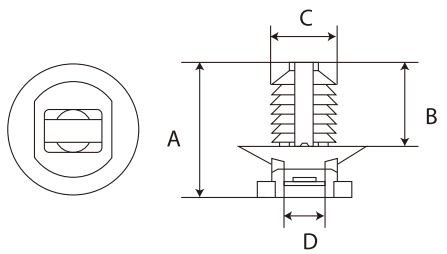

## 杉树型扎带固定座

- 材质：采用UL认可之尼龙耐热性材料制成。
- 适用温度范围：-40℃-105℃。
- 安装温度范围：-10℃-105℃。
- 特点：固定头成杉树状，可用于各种面板厚度，能最大限度减少灰尘、污垢和水的进入。

## Fir Tree Holder

- Material: Heat stabilized(PA66HS).
- Application temperature:-40 °C-105 °C.
- Installation temperature: -10 °C-105 °C.
- Features: The fixed head is in the shape of a fir tree, which can be used for various panel thicknesses to minimize the entry of dust, dirt, and water.

| 编号<br>ITEM.NO. | 配合扎带宽度<br>Matched cable<br>ties width (mm) | A<br>(mm) | B<br>(mm) | C<br>(mm) | D<br>(mm) | 孔径(Ø)<br>Hole Dia.<br>MM | 机板厚度<br>Panel Thickness |
|----------------|--------------------------------------------|-----------|-----------|-----------|-----------|--------------------------|-------------------------|
| FTH-7.5        | 3.6-4.8                                    | 13.8      | 7.5       | 7.9       | 5.2       | 6-7                      | 0.6-4                   |
| FTH-10.5       | 3.6-4.8                                    | 17        | 10.5      | 7.9       | 5.2       | 6-7                      | 1-6                     |





Cable Ties




椭圆头扎带

- 材质: 采用UL认可之尼龙66料或尼龙耐热性材料制成, 防火等级UL94V-2, 耐酸、耐蚀、绝缘性能好、不易老化、承受力强。
- 适用温度范围: -40°C—85°C(尼龙66) -40°C—105°C(尼龙耐热性材料)。
- 安装温度范围: -10°C—85°C(尼龙66)—10°C—105°C(尼龙耐热性材料)。
- 特点: 固定头成椭圆形状, 可用于各种面板厚度, 能最大限度减少灰尘污垢和水的进入。

Elliptical Head Cable Ties

- Material: Polyamide 6.6 or heat stabilized(PA66HS),94V-2 certificated by UL. Acid & erosion control, insulate well and not easy to aging,tensile strong.
- Application temperature: -40°C-85°C(PA66) -40°C-105°C(PA66HS).
- Installation temperature: -10°C-85°C(PA66) -10°C-105°C(PA66HS).
- Features: Fixed head in elliptical shape, which can be used for various panel thicknesses to minimize the entry of dust, dirt, and water.

| 编号<br>ITEM.NO. | L(长)   |     | W(宽)<br>(mm) | (最大)捆扎范围<br>MAX BUNDLE DIA<br>(mm) | 最小拉力<br>Min.Loap Tensile Strength |     | 孔径(Ø)<br>Hole Dia.<br>MM | 适用螺丝<br>Screws<br>MM |
|----------------|--------|-----|--------------|------------------------------------|-----------------------------------|-----|--------------------------|----------------------|
|                | INCH   | MM  |              |                                    | LBS                               | KGS |                          |                      |
| SZS-4.7x165EHT | 6.1/2" | 165 | 4.7          | 35                                 | 40.5                              | 180 | 6.5x13                   | 0.7-5.0              |

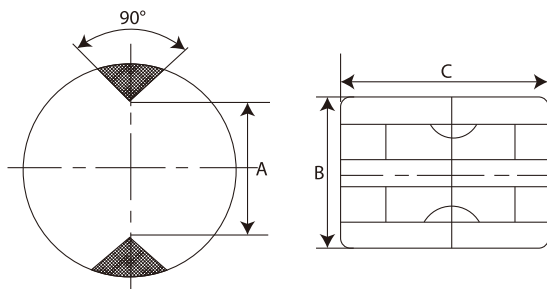

可旋转扎带固定座

- 材质: 采用UL认可之尼龙耐热性材料制成。
- 适用温度范围: -40°C—105°C。
- 特点: 捆扎后可以移动扎带头, 组装后可以轻松添加电缆, 用于平行布线的线束, 即使在安装后也可以扭转90°。


Rotatable Fixing Coupler

- Heat stabilized(PA66HS).
- Application temperature:-40°C-105°C.
- Features: Cable tie head can be moved after bundling. Easy addition ofcables after assembly . For parallel routing of bundles that can be twisted 90° even after installation.


| 编号<br>ITEM.NO. | 配合扎带宽度<br>Matched cable<br>ties width (mm) | A<br>(mm) | B<br>(mm) | C<br>(mm) |
|----------------|--------------------------------------------|-----------|-----------|-----------|
| RFC-12         | 4.8                                        | 7.5       | 8         | 12        |




Cable Ties

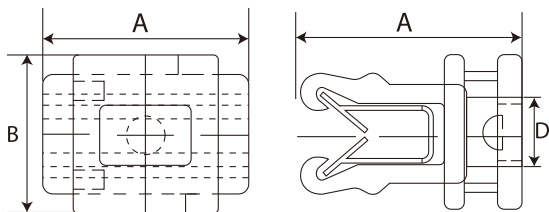

ESS-1

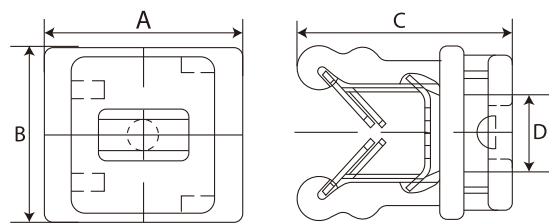

ESS-3

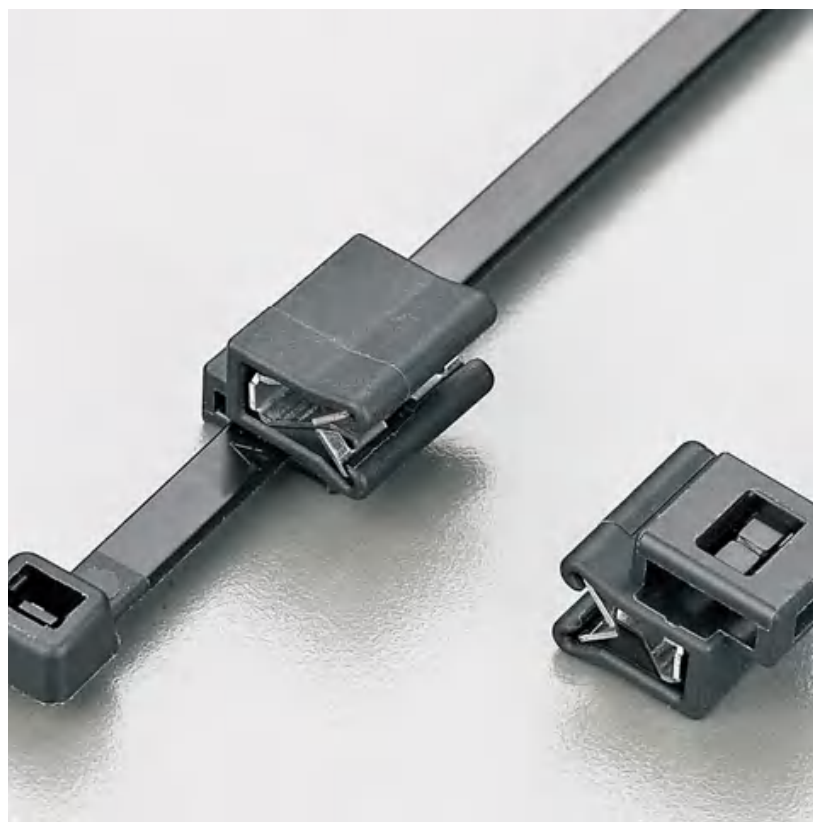


边缘卡扣


- 材质: 采用UL认可之尼龙耐热性材料制成。
- 适用温度范围: -40°C—105°C。
- 安装温度范围: -10°C—105°C。
- 特点: 手工组装方便, 用于1-3毫米或3-6毫米的机板边缘, 集成金属夹持夹牢固到位, 适用于不适合钻孔或粘合剂的地方应用。

Edge Clips

- Material: Heat stabilized(PA66HS).
- Application temperature:-40C-°105°C.
- Installation temperature: -10°C-105°C.
- Features: Easy assembly by hand, For edges of 1-3mm or 3-6mm, Integrated metal clamp holds clip firmly in place , Ideal for applications where holes or adhesives are not suitable.

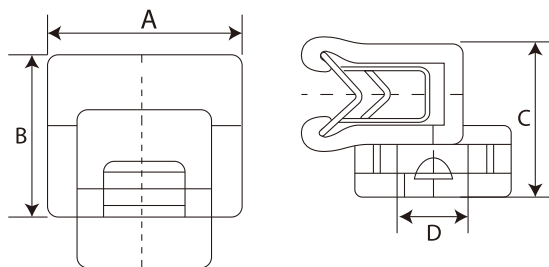


ESC-1

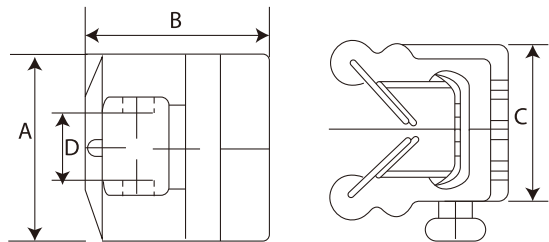

ESC-3

| 编号<br>ITEM.NO. | 配合扎带宽度<br>Matched cable<br>ties width (mm) | A<br>(mm) | B<br>(mm) | C<br>(mm) | D<br>(mm) | 机板厚度<br>Panel<br>Thickness | 备注<br>Remark |
|----------------|--------------------------------------------|-----------|-----------|-----------|-----------|----------------------------|--------------|
| ESS-1          | 4.8                                        | 15        | 14.5      | 12.6      | 5.5       | 1-3                        | 上穿扎带         |
| ESS-3          | 4.8                                        | 15        | 14        | 16.9      | 6         | 3-6                        | 上穿扎带         |
| ESC-1          | 4.8                                        | 14        | 11.8      | 11        | 5.1       | 1-3                        | 侧穿扎带         |
| ESC-3          | 4.8                                        | 14        | 11.4      | 15.8      | 5         | 3-6                        | 侧穿扎带         |

## Cable Ties

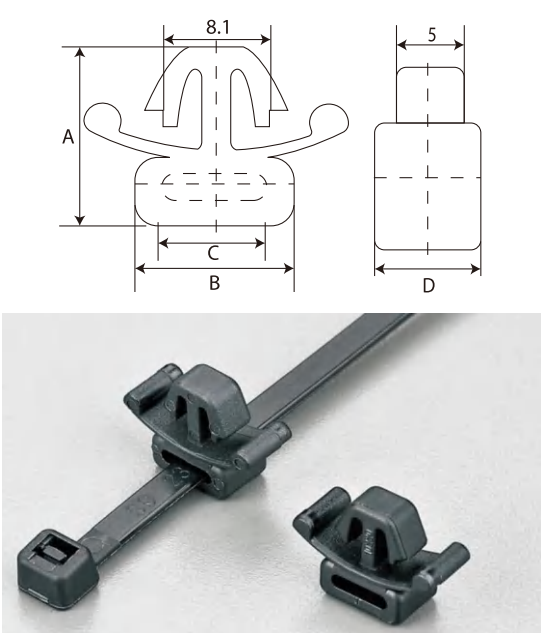

### 插销扎带固定座

- 材质：采用UL 认可之尼龙66料或尼龙耐热性材料制成，防火等级UL94V-2，耐酸、耐蚀、绝缘性能好、不易老化、承受力强。
- 适用温度范围：-40℃-85℃(尼龙66) -40℃-105℃(尼龙耐热性材料)。
- 安装温度范围：-10℃-85℃(尼龙66) -10℃-105℃(尼龙耐热性材料)。
- 特点：头部翼状支撑，张开固定，可实现在机板面上的稳定安装。

### Wing Push Mount

- Material: Polyamide 6.6 or heat stabilized(PA66HS),94V-2 certified by UL. Acid & erosion control,insulate well and not easy to aging, tensile strong.
- Application temperature:-40℃-85℃(PA66)-40℃-105℃(PA66HS).
- Installation temperature: -10℃-85℃(PA66)-10℃-105℃(PA66HS).
- Features: The head is supported in the shape of a wing, which is open and fixed to achieve stable installation on the board.


| 编号<br>ITEM.NO. | 配合扎带宽度<br>Matched cable ties width (mm) | A<br>(mm) | B<br>(mm) | C<br>(mm) | D<br>(mm) | 机板厚度<br>Panel Thickness<br>(mm) |
|----------------|-----------------------------------------|-----------|-----------|-----------|-----------|---------------------------------|
| WPM-8          | 4.8-7.6                                 | 13.8      | 12        | 8         | 8         | 3.0                             |



### 不锈钢嵌片扎带 Stainless Steel Plate Lock Cable Ties

| 编号<br>ITEM.NO. | L(长)      |     | W(宽)<br>(mm) | 捆扎范围<br>Bundle Diameter<br>E(mm) | 拉力<br>Min.Loop Tensile Strength |     |
|----------------|-----------|-----|--------------|----------------------------------|---------------------------------|-----|
|                | INCH      | MM  |              |                                  | LBS                             | KGS |
| SZ-3x100       | 4"        | 100 | 3            | 3-22                             | 22                              | 10  |
| SZ-4x150       | 6"        | 150 | 4            | 3-35                             | 44                              | 20  |
| SZ-4x200       | 8"        | 200 | 4            | 3-50                             | 44                              | 20  |
| SZ-4x280       | 11"       | 280 | 4            | 3-70                             | 44                              | 20  |
| SZ-4x370       | 14 1/4"   | 370 | 4            | 3-102                            | 44                              | 20  |
| SZ-5x250       | 10"       | 250 | 5.5          | 3-65                             | 55                              | 25  |
| SZ-5x300       | 12"       | 300 | 5            | 3-82                             | 55                              | 25  |
| SZ-5x350       | 14"       | 350 | 5            | 3-90                             | 55                              | 25  |
| SZ-5x430       | 17"       | 430 | 5            | 3-110                            | 55                              | 25  |
| SZ-7x300       | 12"       | 300 | 6.8          | 4-82                             | 55                              | 25  |
| SZ-8x400       | 15 3/4"   | 400 | 7.4          | 4-100                            | 55                              | 25  |
| SZ-8x145       | 5 3/4"    | 145 | 8            | 4-30                             | 130                             | 60  |
| SZ-8x175       | 7"        | 175 | 8            | 4-40                             | 130                             | 60  |
| SZ-8x200       | 8"        | 200 | 8            | 4-50                             | 130                             | 60  |
| SZ-8x240       | 9 1/2"    | 240 | 8            | 4-56                             | 130                             | 60  |
| SZ-8x300       | 12"       | 300 | 8            | 4-80                             | 130                             | 60  |
| SZ-8x400       | 15 3/4"   | 400 | 8            | 4-100                            | 130                             | 60  |
| SZ-10x300      | 12"       | 300 | 10           | 10-80                            | 200                             | 90  |
| SZ-10x350      | 14"       | 350 | 10           | 10-90                            | 200                             | 90  |
| SZ-10x400      | 15 3/4"   | 400 | 10           | 10-105                           | 200                             | 90  |
| SZ-10x450      | 17 3/4"   | 450 | 10           | 10-115                           | 200                             | 90  |
| SZ-10x500      | 17 11/16" | 500 | 10           | 10-150                           | 200                             | 90  |
| SZ-10x600      | 25 5/8"   | 600 | 10           | 10-170                           | 200                             | 90  |

## Cable Ties

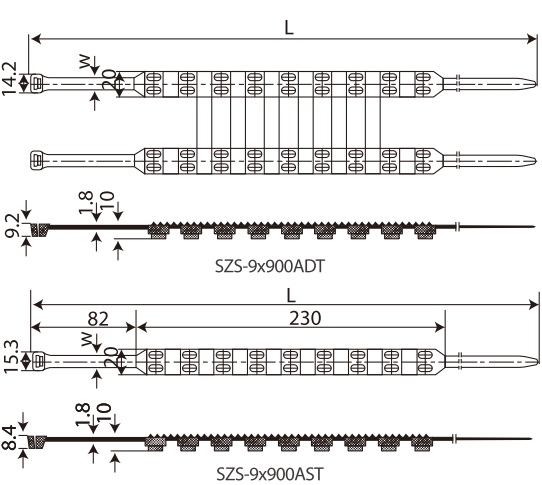

### 汽车防滑扎带


- 材质：采用尼龙改性材料制成，防火等级UL94V-2，耐酸、耐蚀、绝缘性能好、不易老化、承受力强。
- 适用温度范围：-40℃-85℃。
- 安装温度范围：-10℃-85℃。
- 特点：防滑耐磨，使用方便，适合于结冰路段和雪地。

### Antiskid Ties

- Material: Modified Polyamide, 94V-2 certified by UL. Acid & erosion control, insulate well and not easy to aging, tensile strong.
- Application temperature:-40℃-85℃.
- Installation temperature: -10℃-85℃.
- Features: Anti-skidding, wear - resisting, easy operating, used upon icy roads and snowfield.



| 编号<br>ITEM.NO. | L(长)  |      | W(宽)<br>(mm) | 捆扎范围<br>Bundle Diameter<br>E(mm) | 拉力<br>Min.Loop Tensile Strength |     |
|----------------|-------|------|--------------|----------------------------------|---------------------------------|-----|
|                | INCH  | MM   |              |                                  | LBS                             | KGS |
| SZS-9x900AST   | 35.5" | 900  | 9            | 251                              | 175                             | 80  |
| SZS-9x900ADT   | 35.5" | 900  | 9            | 251                              | 175                             | 80  |
| SZS-12x930     | 36.7" | 930  | 12           | 265                              | 250                             | 114 |
| SZS-12x1000    | 40"   | 1000 | 12           | 275                              | 250                             | 114 |



### PE带

- 材质：采用PE料制成。
- 适用温度范围：-40℃-85℃。
- 安装温度范围：-0℃-85℃。
- 颜色：标准颜色为本色、黑色，另有抗紫外线之黑色。特殊颜色欢迎定做。



### PE Ties

- Material: PE.
- Application temperature: -40℃-85℃.
- Installation temperature: -0℃-85℃.
- Color: Natural,Black,UV black,other colors are available as requested.

| 编号<br>ITEM.NO. | L(长) |     | W(宽)<br>(mm) | Thickness(mm) |
|----------------|------|-----|--------------|---------------|
|                | INCH | MM  |              |               |
| SZS-170PET     | 7"   | 170 | 5.4          | 1.5           |



Cable Ties



粘扣式扎带

- 材质：母面PP，公面NYLON黑色（备有红、黄、蓝、绿）。
- 用途：适用于网络线（UTP/STP/Fiber）、讯号线、电源线之束缚，避免使用传统尼龙扎线带时，因过紧而影响传输速度，可重复使用。

Magic Cable Ties

- Material: Female sides are made of pp, male sides are made of Nylon.
- Application: Reusable; suitable for bundling LAN cable(UTP/STP/Fiber), signal line, power line, avoiding the transmission rate effected by nylon cable tie of tightening too much.

| 编号<br>ITEM.NO. | L(长)<br>MM | W(宽)<br>(mm) | 备注<br>Remark                                      |
|----------------|------------|--------------|---------------------------------------------------|
| SZS-12*110     | 110        | 12           | 特殊规格可定做<br>Other sizes are available as requested |
| SZS-12*125     | 125        | 12           |                                                   |
| SZS-12*135     | 135        | 12           |                                                   |
| SZS-12*145     | 145        | 12           |                                                   |
| SZS-12*150     | 150        | 12           |                                                   |
| SZS-12*180     | 180        | 12           |                                                   |
| SZS-12*200     | 200        | 12           |                                                   |
| SZS-12*250     | 250        | 12           |                                                   |
| SZS-12*300     | 300        | 12           |                                                   |
| SZS-12*400     | 400        | 12           |                                                   |
| SZS-12*500     | 500        | 12           |                                                   |
| SZS-16*200     | 200        | 16           |                                                   |
| SZS-16*250     | 250        | 16           |                                                   |
| SZS-16*300     | 300        | 16           |                                                   |
| SZS-16*400     | 400        | 16           |                                                   |
| SZS-16*500     | 500        | 16           |                                                   |

| 编号<br>ITEM.NO.  | SIZE<br>MM   | SIZE<br>INCH | 备注<br>Remark                                      |
|-----------------|--------------|--------------|---------------------------------------------------|
| SZS-(3/8)-25yd  | 9.5mmx22.8m  | 3/8" x 25yd  | 特殊规格可定做<br>Other sizes are available as requested |
| SZS-(1/2)-25yd  | 12.5mmx22.8m | 1/2"x25yd    |                                                   |
| SZS-(3/4)-25yd  | 19.0mmx22.8m | 3/4"x25yd    |                                                   |
| SZS-(3/8)-25m   | 10.0mmx25.0m | 2/5"x27.3yd  |                                                   |
| SZS-(5/8)-25m   | 16.0mmx25.0m | 2/3"x27.3yd  |                                                   |
| SZS-(13/16)-25m | 20.0mmx25.0m | 4/5"x27.3yd  |                                                   |
| SZS-(1)-25m     | 25.0mmx25.0m | 1"x27.3yd    |                                                   |

Cable Ties



可撕魔术贴扎带 Tearable Velcroes Cable Ties

|                   |                             |
|-------------------|-----------------------------|
| USAGE             | Earphone Wire/Electric Wire |
| FUNCTIONAL DESIGN | Flexible                    |
| INSTALLATION TYPE | Hook Type                   |
| NORMAL SIZE       | width 12mm                  |
| NOTE              | Support customization       |



PVC 扎丝

- 材质：外皮采用PVC制成，内部为钢丝。
- 用途：长达用于各种电线，园林，园艺等捆孔。

Twist Ties

- Material: Jacket made of PVC,inside body is steel wire.
- Application: used in wires,park and gardening.




| 编号<br>ITEM.NO. | SIZE<br>MM | 包装<br>PACKING | 备注<br>Remark                     |
|----------------|------------|---------------|----------------------------------|
| TTS-0.45       | 0.45       | 1Kg/Roll      | 特殊规格可定做<br>SUPPORT customization |
| TTS-0.55       | 0.55       |               |                                  |
| TTS-0.75       | 0.75       |               |                                  |
| TTS-0.90       | 0.9        |               |                                  |
| TTS-1.20       | 1.2        |               |                                  |
| TTS-1.50       | 1.5        |               |                                  |



本公司热忱欢迎新老客户来样,来图或来模委托加工各种扎带和塑料件。  
We welcome OEM orders for cable ties or plastic parts by samples, drawing or molds.

- 来样、来图或来模不得涉及任何专利问题
- The OEM orders for wire connectors by samples, drawing or molds shouldn't involve in the infringement of patent.
- 左图仅供参考
- All pictures here are for reference only.

Cable Ties

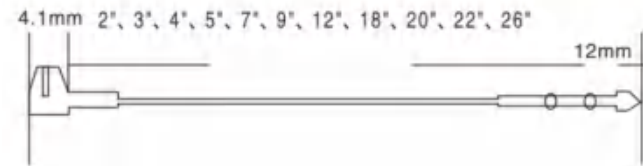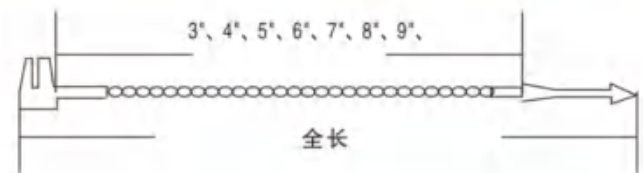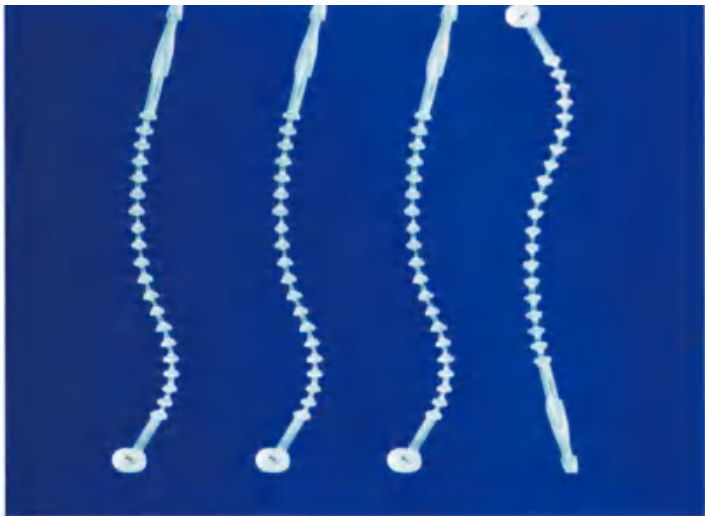

珠带技术参数

|              |                                             |
|--------------|---------------------------------------------|
| 材料           | 常用规格：3"、4"、5"、6"、7"、8"、9"、<br>常用规格：3"、4"、5" |
| 拉力           | 3"~9"的拉力为11lbs;<br>3"~5"MM的拉力为16.5lbs       |
| 包装数量         | 1000条/袋；100袋/箱                              |
| 常规颜色         | 1000条/袋；100袋/箱                              |
| 特殊颜色<br>(定制) | 可根据国际PANTON色卡或来样定制。                         |



珠带（三叉头）技术参数

|          |         |                                                                       |
|----------|---------|-----------------------------------------------------------------------|
| 材料       | Pp (聚丙) | 常用规格：2"、3"、4"、5"、7"、9"、12"、18"、20"、22"、26"<br>(注：2"-26"中非常规的任意规格可定制)。 |
| 拉力       | PA (尼龙) | 常用规格：2"、3"、4"、5"、6"、7"、9"<br>(注：2"-9"中非常规的任意规格可定制)。                   |
| 包装数量     | PP (聚丙) | 2"-22"的拉力为7.7lbs, 26"的拉力为11lbs;                                       |
| 常规颜色     | PA (尼龙) | 2"-9"MM的拉力为11lbs                                                      |
| 特殊颜色(定制) |         | 可根据国际PANTON色卡或来样定制。                                                   |

Material Characteristics

聚酰胺的含水量

聚酰胺是一种吸湿性材料，这意味着它能吸收和释放水分。机械性能受到含水量的显著影响，尤其是柔韧性和最小抗拉强度。在23°C的温度和50%的相对湿度下，聚酰胺的水饱和度约为2.5%，为了优化扎带的加工，聚酰胺在平衡状态下的含水量约为2.5%是很重要的。

因此，产品的质量和功能会受到含水量的影响，所以如何正确的储存产品是至关重要的。请阅读我们的关于储存的说明。

Water Content In Polyamide

Polyamide is a hygroscopic material - this means that it absorbs and releases water. The mechanical properties are significantly affected by the water content - especially flexibility and minimum tensile strength. In a standard atmosphere of 23 °C and 50% relative humidity, the degree of water saturation of polyamide is around 2.5%. For optimal processing of cable ties it is therefore important that the polyamide has a water content of approximately 2.5% in a state of equilibrium .

The quality and functionality of the products are thus affected by the water content, therefore the correct storage of our products is crucial. Please read our separate instructions on storage .

聚酰胺(PA)尼龙扎带的最佳储存条件

对于尼龙扎带的最佳处理，重要的是材料处于含水量约2.5%的平衡状态。我们使用的包装确保了材料中含水量保存恒定，因此，重要的是将产品保存在原始的包装中，以保持扎带的质量。

- 1.一旦打开包装袋，请尽快使用扎带。
- 2.请务必将扎带放在聚乙烯袋中密封。
- 3.不要将扎带暴露在阳光直射下。
- 4.将产品存放在远离热源的地方，如不要放在散热器上。
- 5.理想的储存条件是温度23度，湿度50%。

Optimum Storage Conditions For Cable Ties Made Of Polyamide ( PA )

For optimum handling of cable ties it is important that the material is in a condition of equilibrium with a water content of approximately 2.5%. The packaging used by SZS enensures that the water content in the material remains constant . Therefore, it is important to store the products in their original packaging to prereserve the quality of the ties .

1. Once opened you should use the ties as quickly as possible .
2. Always store ties in the sealed plastic bag made of polyethylene .
3. Do not expose the product to direct sunlight .
4. Store the product away from direct sources of heat .For example , do not place on the radiators.
5. The ideal storage conditions are those of the central European standard climate: 23°C and 50% humidity.

耐温性

◆通常，不含任何添加剂的聚酰胺材料只能安装在-10°C的温度下，而当温度低于-10°C时，材料会变得非常脆。因此，对于普通级聚酰胺材料，如果温度低于-10°C，我们不建议您仍然安装扎带。

◆很多人怀疑“适用温度是多少”是什么意思？通常，这意味着扎带在安装后仍然可以使用的温度。因此，如果需要在极低温度下安装扎带，请提供正确的材料要求。

Temperature Resistance

▪ Normally, the polyamide material without any additive, it only can be installed under the temeperature of-10°C, and the material wil becomes very brittle with the temperature of lower than -10°C. So for the normal grade polyamide material, we do not suggest you to still install the cable ties if the temperature is lower than -10°C.

▪ Many people is doubting that "what's the application temp" means? usually it means the temperature the cable ties stil could be worked after installation. So if you need to install cable ties under extremely low temperature, please ask for the correct material.

◆聚酰胺材料对水分非常敏感。如果没有水分，材料就会变脆。请不要在使用前长时间打开包装袋，使用后请立即关闭包装袋。在干燥和寒冷的冬季，请不要在寒冷和干燥的天气中保存扎带。如果您还没有准备好使用扎带，建议您不要将其从带空调的仓库中移出。

◆电缆扎带的最佳储存条件为23°C，湿度为50%。

▪ The polyamide material is really sensitive to the moisture. If without moisture, the material will become brittle. So please do not open the bag for a long time before you use, and also after using, please close the bag immediately. In the dry and cold winter, please do not keep the cable ties in a cold and dry weather. We do not suggest you to move out the Cable Ties from the conditioned warehouse if you are not ready to use it.

▪ The best condition for storage of Cable Ties is 23°C , at the humudity of 50%.



## Material Characteristics

### UV 抗紫外线

◆用于生产扎带的所有聚合物（包括聚酰胺）都对紫外线射敏感。最常用的用于保护聚酰胺免受紫外线辐射的添加剂是碳粉，俗称“炭黑”。

◆自然色扎带的抗紫外线能力较低，但自然色颜色通常会反射阳光，因此可用于一般户外用途。但不建议用于户外应用。

◆黑色扎带添加了碳黑，它们具有更好的耐候性和抗紫外线辐射性，更适合户外应用，但这不足以保护材料长期免受紫外线辐射的损坏。

◆对于这些需求，可以使用耐候性扎带，如果要长期在户外使用，我们强烈建议您选择耐超强耐紫外线(耐候性)的材料，我们的耐紫外线材料已通过UL测试，可长期用于户外。(应大于7年)

### UL62275标准

◆环拉力

Type1或Type11，任何单个值均不得小于热老化和温度循环后环拉力的50%。

Type2或Type21，任何单个值均不得小于热老化和温度循环后规定的环拉力的100%。

◆最低安装温度和工作温度测试  
根据UL62275新标准，应进行最低安装温度和工作温度测试。不同的工厂会规定不同的最低安装温度和操作温度。因此，新的UL将显示这些信息，并显示产品质量和产品特性。

◆烟和热生成量

AH-1:适用于空气处理空间-1(静室室)(用于金属部件，如不锈钢电缆扎带);

AH-2:适用于空气处理空间-2(静室室)(适用于非金属部件复合组件，如尼龙扎带、扎带固定、涂层不锈钢扎带)。

#### UV Ressitant

▪ All polymers including the polyamides used for the production of cable ties are sensitive to UV radiation. The most common additive used for protecting polyamides from UV radiation is carbon powder, commonly known as "carbon black".

▪ Natural Cable Ties have low resistance to UV radiation, but natural color usually can reflect the sunlight, so it could be used for general purpose outdoor. But not suggested for outdoor application.

▪ Black Cable Ties are additivated with carbon black. They have improved weather and UV radiation resistance and are better suitable for outdoor applications, but this is not enough to protect the material from the damage due to the UV-radiation for a long time.

▪ For these needs the weather resistance cable ties could be used, and if for a long term of outdoor use, we strongly suggest you to choose Strong UV resistance (weather resistance) material and our strong UV resistance material, it has been tested by UL as an available long term outdoor application. (supposed to be >7 years)

#### Standard From UL 62275

▪ Loop tensile strength

Type 1 or 11 based, No individual value shall be less than 50% of the loop tensile strength declared after heat aging, after temperature cycling

Type 2 or 21 based. No individual value shall be less than 100% of the loop tensile strength declared after heat aging, after temperature cycling.


▪ Minimum installation temperature and operation temperature test  
According to the new standard of UL62275, the minimum installation temperature, and application temperature test should be made. Different factory they will declare different minimum installation temperature, and application temperature as well. so new UL will show such information and to show the quality of the products, and the characters of the products.

▪ Smoke and heat generation

AH-1: Suitable for use in air-handling spaces -1 (plenums) (for Metallic component, like stainless steel cable ties)

AH-2: Suitable for use in air-handling spaces-2 (plenums) (for Non-metallic component and Composite component, like nylon cable ties, cable ties fixing, coated stainless steel cable ties).

## Stainless Steel Cable Ties

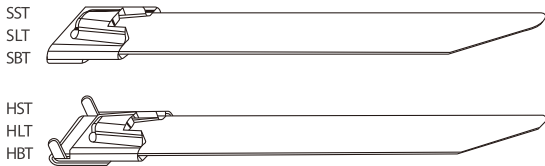

### 不锈钢扎带(船用)

- 材质：采用不锈钢201,304,316材质，各种长度皆可制作，特殊规格按客户供样制作,宽度为4.6mm,7.9mm,10mm,12mm,16mm,19mm等。
- 特性：耐酸、耐腐蚀、抗张强度高，使用简单，快捷等优势；
- 工作温度范围：-60℃-150℃。

#### Stainless Steel Cable Ties

- Material: Stainless steel type: 201,304,316, all length are available,special sizes can be customized, the width are 4.6mm,7.9mm,10mm,12mm,16mm,19mm,etc.
- Characteristic: Acid-resisting, anti-corrosion, high tensile strength, simple and easy to use, etc.
- Working temperature: -60℃-150℃.

| 编号<br>ITEM.NO. |          | L(长)<br>(mm) | W(宽)<br>(mm) | 最大捆扎范围<br>MAX.BUNDLE<br>DIA.(mm) | 拉力<br>Tensile Strength |     |
|----------------|----------|--------------|--------------|----------------------------------|------------------------|-----|
|                |          |              |              |                                  | Min.loop<br>LBS        | KGS |
| SST-100        | HST-100  | 100          | 4.6          | 22                               | 135                    | 60  |
| SST-130        | HST-130  | 130          | 4.6          | 31                               | 135                    | 60  |
| SST-150        | HST-150  | 150          | 4.6          | 35                               | 135                    | 60  |
| SST-200        | HST-200  | 200          | 4.6          | 50                               | 135                    | 60  |
| SST-250        | HST-250  | 250          | 4.6          | 65                               | 135                    | 60  |
| SST-300        | HST-300  | 300          | 4.6          | 80                               | 135                    | 60  |
| SST-350        | HST-350  | 350          | 4.6          | 95                               | 135                    | 60  |
| SST-400        | HST-400  | 400          | 4.6          | 105                              | 135                    | 60  |
| SST-450        | HST-450  | 450          | 4.6          | 118                              | 135                    | 60  |
| SST-500        | HST-500  | 500          | 4.6          | 150                              | 135                    | 60  |
| SST-550        | HST-550  | 550          | 4.6          | 160                              | 135                    | 60  |
| SST-600        | HST-600  | 600          | 4.6          | 180                              | 135                    | 60  |
| SST-650        | HST-650  | 650          | 4.6          | 190                              | 135                    | 60  |
| SST-700        | HST-700  | 700          | 4.6          | 205                              | 135                    | 60  |
| SST-750        | HST-750  | 750          | 4.6          | 220                              | 135                    | 60  |
| SST-800        | HST-800  | 800          | 4.6          | 230                              | 135                    | 60  |
| SST-850        | HST-850  | 850          | 4.6          | 250                              | 135                    | 60  |
| SST-900        | HST-900  | 900          | 4.6          | 260                              | 135                    | 60  |
| SST-950        | HST-950  | 950          | 4.6          | 280                              | 135                    | 60  |
| SST-1000       | HST-1000 | 1000         | 4.6          | 290                              | 135                    | 60  |
| SST-1100       | HST-1100 | 1100         | 4.6          | 305                              | 135                    | 60  |
| SST-1200       | HST-1200 | 1200         | 4.6          | 340                              | 135                    | 60  |
| SST-1300       | HST-1300 | 1300         | 4.6          | 365                              | 135                    | 60  |
| SST-1400       | HST-1400 | 1400         | 4.6          | 405                              | 135                    | 60  |
| SLT-100        | HLT-100  | 100          | 7.9          | 22                               | 180                    | 80  |
| SLT-130        | HLT-130  | 130          | 7.9          | 31                               | 180                    | 80  |
| SLT-150        | HLT-150  | 150          | 7.9          | 35                               | 180                    | 80  |
| SLT-200        | HLT-200  | 200          | 7.9          | 50                               | 180                    | 80  |
| SLT-250        | HLT-250  | 250          | 7.9          | 65                               | 180                    | 80  |
| SLT-300        | HLT-300  | 300          | 7.9          | 80                               | 180                    | 80  |


## Stainless Steel Cable Ties



| 编号<br>ITEM.NO. |          | L(长)<br>(mm) | W(宽)<br>(mm) | 最大捆扎范围<br>MAX.BUNDLE<br>DIA.(mm) | 拉力<br>Min.Loop Tensile Strength |     |
|----------------|----------|--------------|--------------|----------------------------------|---------------------------------|-----|
|                |          |              |              |                                  | LBS                             | KGS |
| SLT-350        | HLT-350  | 350          | 7.9          | 95                               | 180                             | 80  |
| SLT-400        | HLT-400  | 400          | 7.9          | 105                              | 180                             | 80  |
| SLT-450        | HLT-450  | 450          | 7.9          | 118                              | 180                             | 80  |
| SLT-500        | HLT-500  | 500          | 7.9          | 150                              | 180                             | 80  |
| SLT-550        | HLT-550  | 550          | 7.9          | 160                              | 180                             | 80  |
| SLT-600        | HLT-600  | 600          | 7.9          | 180                              | 180                             | 80  |
| SLT-650        | HLT-650  | 650          | 7.9          | 190                              | 180                             | 80  |
| SLT-700        | HLT-700  | 700          | 7.9          | 205                              | 180                             | 80  |
| SLT-750        | HLT-750  | 750          | 7.9          | 220                              | 180                             | 80  |
| SLT-800        | HLT-800  | 800          | 7.9          | 230                              | 180                             | 80  |
| SLT-850        | HLT-850  | 850          | 7.9          | 250                              | 180                             | 80  |
| SLT-900        | HLT-900  | 900          | 7.9          | 260                              | 180                             | 80  |
| SLT-950        | HLT-950  | 950          | 7.9          | 280                              | 180                             | 80  |
| SLT-1000       | HLT-1000 | 1000         | 7.9          | 290                              | 180                             | 80  |
| SLT-1100       | HLT-1100 | 1100         | 7.9          | 305                              | 180                             | 80  |
| SLT-1200       | HLT-1200 | 1200         | 7.9          | 340                              | 180                             | 80  |
| SLT-1300       | HLT-1300 | 1300         | 7.9          | 365                              | 180                             | 80  |
| SLT-1400       | HLT-1400 | 1400         | 7.9          | 405                              | 180                             | 80  |
| SBT-150        | HBT-150  | 150          | 12           | 35                               | 270                             | 120 |
| SBT-200        | HBT-200  | 200          | 12           | 50                               | 270                             | 120 |
| SBT-250        | HBT-250  | 250          | 12           | 65                               | 270                             | 120 |
| SBT-300        | HBT-300  | 300          | 12           | 80                               | 270                             | 120 |
| SBT-350        | HBT-350  | 350          | 12           | 95                               | 270                             | 120 |
| SBT-400        | HBT-400  | 400          | 12           | 105                              | 270                             | 120 |
| SBT-450        | HBT-450  | 450          | 12           | 118                              | 270                             | 120 |
| SBT-500        | HBT-500  | 500          | 12           | 150                              | 270                             | 120 |
| SBT-550        | HBT-550  | 550          | 12           | 160                              | 270                             | 120 |
| SBT-600        | HBT-600  | 600          | 12           | 180                              | 270                             | 120 |
| SBT-650        | HBT-650  | 650          | 12           | 190                              | 270                             | 120 |
| SBT-700        | HBT-700  | 700          | 12           | 205                              | 270                             | 120 |
| SBT-750        | HBT-750  | 750          | 12           | 220                              | 270                             | 120 |
| SBT-800        | HBT-800  | 800          | 12           | 230                              | 270                             | 120 |
| SBT-850        | HBT-850  | 850          | 12           | 250                              | 270                             | 120 |
| SBT-900        | HBT-900  | 900          | 12           | 260                              | 270                             | 120 |
| SBT-950        | HBT-950  | 950          | 12           | 280                              | 270                             | 120 |
| SBT-1000       | HBT-1000 | 1000         | 12           | 290                              | 270                             | 120 |
| SBT-1100       | HBT-1100 | 1100         | 12           | 305                              | 270                             | 120 |
| SBT-1200       | HBT-1200 | 1200         | 12           | 340                              | 270                             | 120 |
| SBT-1300       | HBT-1300 | 1300         | 12           | 365                              | 270                             | 120 |
| SBT-1400       | HBT-1400 | 1400         | 12           | 405                              | 270                             | 120 |

- 以上所有规格之不锈钢扎带的带身皆可喷塑。
- 所有喷塑产品的编号另加 "p", 如 "SST-100P" 或 "HST-100P".
- The body of the above specification stainless steel cable ties can be plastic-coating.
- All item No. of plastic-coating products should plus "p",such as "SST-100P" or "HST-100P".

## Stainless Steel Cable Ties

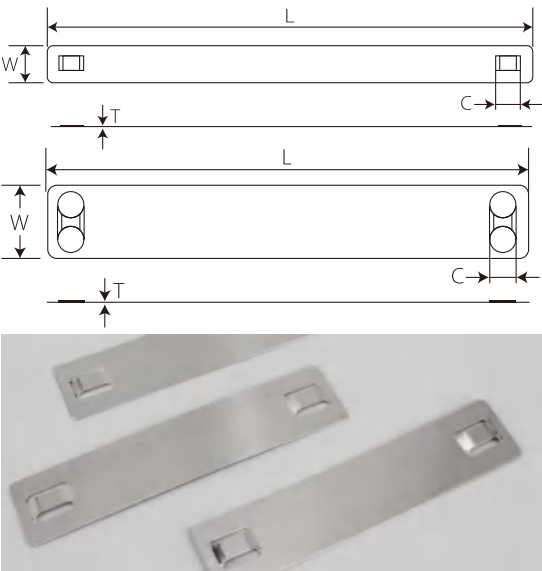

### 钢扎带标识牌

▪材质：SS201/SS304/SS316。

### Stainless Steel Cable Ties Marker

▪Material: SS201/SS304/SS316.

| 编号<br>ITEM.NO. | L(长) |      | W(宽) |      | C   |      |
|----------------|------|------|------|------|-----|------|
|                | MM   | INCH | MM   | INCH | MM  | INCH |
| SZS-SSM-9.5    | 90   | 3.5  | 9.5  | 0.4  | 5.9 | 0.23 |
| SZS-SSM-10     | 102  | 44   | 10   | 0.4  | 11  | 0.43 |

| 编号<br>ITEM.NO. | L(长) |      | W(宽) |      | C   |      |
|----------------|------|------|------|------|-----|------|
|                | MM   | INCH | MM   | INCH | MM  | INCH |
| SZS-SSM-19     | 90   | 3.54 | 19   | 0.8  | 6.2 | 0.24 |



### 喉箍 Hose Clamp

| 编号<br>ITEM.NO. | Usage Range<br>(MM) | 每箱数量<br>Quantity per<br>carton(PC/CTN) |
|----------------|---------------------|----------------------------------------|
| HC-1719        | 17-19               | 500                                    |
| HC-2022        | 20-22               | 500                                    |
| HC-2325        | 23-25               | 500                                    |
| HC-2628        | 26-28               | 500                                    |
| HC-2931        | 29-31               | 500                                    |
| HC-3639        | 36-39               | 400                                    |
| HC-4043        | 40-43               | 400                                    |
| HC-4347        | 43-47               | 300                                    |
| HC-4851        | 48-51               | 300                                    |
| HC-5155        | 51-55               | 300                                    |
| HC-5559        | 55-59               | 300                                    |
| HC-5963        | 59-63               | 300                                    |
| HC-6467        | 64-67               | 300                                    |
| HC-6873        | 68-73               | 200                                    |
| HC-7379        | 73-79               | 200                                    |
| HC-7985        | 79-85               | 200                                    |
| HC-8591        | 85-91               | 200                                    |
| HC-9197        | 91-97               | 200                                    |
| HC-97104       | 97-104              | 200                                    |
| HC-104112      | 104-112             | 150                                    |
| HC-112121      | 112-121             | 150                                    |
| HC-121130      | 121-130             | 150                                    |
| HC-130140      | 130-140             | 100                                    |
| HC-140148      | 140-148             | 100                                    |
| HC-150162      | 150-162             | 100                                    |
| HC-162174      | 162-174             | 100                                    |
| HC-175187      | 175-187             | 100                                    |
| HC-188200      | 188-200             | 80                                     |



Metal Clamp



| 编号<br>ITEM.NO. | Usage Range<br>(mm) | 每箱数量<br>QUANTITY PER<br>CARTON(PC/CTN) |
|----------------|---------------------|----------------------------------------|
| HCS-612        | 6-10                | 5000                                   |
| HCS-1016       | 10-16               | 5000                                   |
| HCS-1319       | 13-19               | 5000                                   |
| HCS-1625       | 16-25               | 5000                                   |
| HCS-1929       | 19-29               | 5000                                   |
| HCS-2232       | 22-32               | 5000                                   |
| HCS-2538       | 25-38               | 4000                                   |
| HCS-3244       | 32-44               | 4000                                   |
| HCL-1625       | 16-25               | 2000                                   |
| HCL-2232       | 22-32               | 2000                                   |
| HCL-2538       | 25-38               | 2000                                   |
| HCL-3244       | 32-44               | 2000                                   |
| HCL-3551       | 35-51               | 1500                                   |
| HCL-4464       | 44-64               | 1500                                   |
| HCL-5170       | 51-70               | 1300                                   |
| HCL-6476       | 64-76               | 1200                                   |
| HCL-7089       | 70-89               | 1000                                   |
| HCL-7692       | 76-92               | 1000                                   |
| HCL-80100      | 80-100              | 1000                                   |
| HCL-90110      | 90-110              | 800                                    |
| HCL-100120     | 100-120             | 700                                    |
| HCL-110130     | 110-130             | 600                                    |
| HCL-120140     | 120-140             | 500                                    |
| HCL-130150     | 130-150             | 500                                    |
| HCL-140160     | 140-160             | 400                                    |
| HCL-150170     | 150-170             | 400                                    |
| HCL-160180     | 160-180             | 400                                    |
| HCL-170190     | 170-190             | 300                                    |
| HCL-180200     | 180-200             | 300                                    |

Stainless Steel Cable Ties



不锈钢盘带

- 材质：采用不锈钢201,304,316材质。
- 工作温度范围：-60℃-150℃。
- 特性：耐酸、耐腐蚀、抗张强度高，使用简单，快捷等优势。

Stainless Steel Banding Strap

- Material: Stainless steel type: 201,304,316.
- Working temperature: -60℃-150℃.
- Characteristic:Acid-resisting, anti-corrosion, high tensile strength,simple and easy to use, etc.

| 编号<br>ITEM.NO. | 尺寸<br>Size(mm) | 每卷数量<br>Qty per roll/meter |
|----------------|----------------|----------------------------|
| SSTBS2545      | 0.25*4.5       | 100                        |
| SSTBS2508      | 0.25*8         | 100                        |
| SSTBS2510      | 0.25*10        | 100                        |
| SSTBS0410      | 0.4*10         | 50                         |
| SSTBS0312      | 0.3*12         | 50                         |
| SSTBS0412      | 0.4*12         | 50                         |
| SSTBS0512      | 0.5*12         | 30                         |
| SSTBS0316      | 0.3*16         | 50                         |
| SSTBS0416      | 0.4*16         | 50                         |
| SSTBS0516      | 0.5*16         | 50                         |
| SSTBS0716      | 0.7*16         | 50                         |
| SSTBS0816      | 0.8*16         | 50                         |
| SSTBS1016      | 1.0*16         | 50                         |
| SSTBS0419      | 0.4*19         | 50                         |
| SSTBS0519      | 0.5*19         | 50                         |
| SSTBS0719      | 0.7*19         | 50                         |
| SSTBS0819      | 0.8*19         | 50                         |
| SSTBS1019      | 1.0*19         | 50                         |



不锈钢扎扣 Stainless Steel Buck

| 编号<br>ITEM.NO. | 适合宽度<br>Suitable Band of width (mm) | 适合宽度<br>Suitable Band of width (mm) |
|----------------|-------------------------------------|-------------------------------------|
| SZ-SSB-9.5     | 9.5                                 | 3/8                                 |
| SZ-SSB-12.7    | 12.7                                | 1/2                                 |
| SZ-SSB-16      | 16                                  | 5/8                                 |
| SZ-SSB-19      | 19                                  | 3/4                                 |

## Cable Ties Tools

## 扎带枪 TG-100

- 将束带拉紧并切断,适用束带宽度为2.4~4.8mm。
- For tensioning and cut-off cable tie from width 2.4mm to 4.8mm. FOR "DIY" ONLY



- 适用于尼龙扎带宽度：2.4~4.8mm以下6.3"(160)mm。
- 适用于快速捆扎电缆电线:自动切断扎带剩余部分。
- 捆切合二为一,可用的塑料扎带长50~350mm 宽4.8mm以下。
- Suitable for fast bind wire and cable automatic cut-and -bind left part.
- Deviding cable tie 50~350mm,its width 4.8mm.

## 扎带枪 SZS-600A



## 扎带枪 SZS-500



## 扎带枪 SZS-600N

- 适用于不锈钢扎带宽度: 4.6-7.9mm。
- Suitable for stainless steel cable tie 4.6-7.9mm width.



## 扎带枪 CT-02

- 适用于不锈钢扎带宽度: 4.6-12mm。
- Suitable for stainless steel cable tie 4.6-12mm width.



## Cable Ties Tools

## 扎带枪 CTG-001

旋转拉力强度调校掣用以调校拉力:

- 1-3号适用2.5mm以下扎带。
- 3-6号适用于3.6mm以下扎带。
- 6-8号适用于4.8mm以下扎带。
- 重量:0.32kg 长度:180mm 材质:金属
- Adjusting knob to correct number in window of handle:
- 1-3 for miniature cross section ties (2.5mm);
- 3-6 for intermediate cross section ties (3.6mm);
- 6-8 for standard cross section cable ties (4.8mm).
- Weight: 0.32kg, L: 180mm, Material: Metal



## 扎带枪 SZS-519

- 适用于尼龙扎带宽度：2.4~9.0mm以下7.5"(195)mm。
- 适用于快速捆扎电缆电线:自动切断扎带剩余部分。
- 捆切合二为一,可用的塑料扎带长50~350mm 线带宽9mm以下。
- 重量: 0.26kg 长度: 195mm 材质: 金属制
- Suitable for fast bind wire and cable automatic cut-and -bind left part.
- Deviding cable tie 50~500mm,its width 9.0mm.
- Weight:0.26kg L:195mm Material: Metal



## 扎带枪 LQA-001

- 适用于不锈钢扎带,快速将钢带拉紧并切面,也可以调整捆扎时候的压力。
- Suitable for stainless steel cable ties,fast tighten cable ties and cut off the left part of cable tie, adjust the pressure for pack.






# 02 Two

## CABLE CLIPS 线卡系列



### Cable Clips

Circle Cable Clips



#### 圆型钢钉线卡

- 本系列线卡均采用PE(白色、灰色)料注射成功, 弹性大, 耐冲击, 绝不破裂。
- 本系列线卡, 均为插钉式, 钢钉直接附在线卡上, 可大量节省工时, 降低施工成本。

#### Circle Cable Clips


- PE(white, grey), elasticity and shock resisting.
- Inserting type, nail attached in clips. Save time and cost.



| 编号<br>ITEM.NO.           | 高(H)<br>(mm) | 圆径D(mm)<br>CIRCLE PATH | 钢钉<br>NAIL | 颜色<br>Color                                  |
|--------------------------|--------------|------------------------|------------|----------------------------------------------|
| SZR-3MM                  | 3.6          | 3                      | 1.4x15     | WHITE<br>GREY<br>BLACK<br>BROWN<br>DARK GREY |
| SZR-3.5MM                | 4.2          | 3.5                    | 1.4x15     |                                              |
| SZR-4MM                  | 5.3          | 4                      | 1.7x14     |                                              |
| SZR-5MM                  | 6            | 5                      | 1.7x14     |                                              |
| SZR-6MM                  | 8            | 6                      | 1.8x17     |                                              |
| SZR-7MM                  | 8.7          | 7                      | 1.8x17     |                                              |
| SZR-8MM                  | 9.5          | 8                      | 2.0x19     |                                              |
| SZR-9MM                  | 11           | 9                      | 2.0x20     |                                              |
| SZR-10MM                 | 12           | 10                     | 2.1x23     |                                              |
| SZR-12MM                 | 13.5         | 12                     | 2.1x25     |                                              |
| SZR-14MM                 | 16.5         | 14                     | 2.3x30     |                                              |
| SZR-16MM                 | 18           | 16                     | 2.3x32     |                                              |
| SZR-17MM                 | 20           | 17                     | 2.6x38     |                                              |
| SZR-18MM                 | 20.5         | 18                     | 2.6x38     |                                              |
| SZR-20MM                 | 22.5         | 20                     | 2.6x40     |                                              |
| SZR-22MM                 | 23.5         | 22                     | 2.9x42     |                                              |
| SZR-25MM                 | 26.5         | 25                     | 2.9x50     |                                              |
| SZR-30MM<br>double nails | 32.5         | 30                     | 3.3x55     |                                              |
| SZR-32MM<br>double nails | 34.5         | 32                     | 3.3x55     |                                              |
| SZR-35MM<br>double nails | 38           | 35                     | 3.3x60     |                                              |
| SZR-40MM<br>double nails | 43.8         | 40                     | 3.3x65     |                                              |
| SZR-50MM<br>double nails | 54.5         | 50                     | 4.0*78     |                                              |


Cable Clips

K-type



K型圆钢钉线卡 K-type Circle Cable Clips

| 编号<br>ITEM.NO. | 高 ( H )<br>(mm) | 圆径D(mm)<br>CIRCLE PATH | 钢钉<br>NAIL | 颜色<br>Color                                  |
|----------------|-----------------|------------------------|------------|----------------------------------------------|
| SZK-4MM        | 6.3             | 4                      | 2.5×18     | WHITE<br>GREY<br>BLACK<br>BROWN<br>DARK GREY |
| SZK-5MM        | 7.4             | 5                      | 2.5×18     |                                              |
| SZK-6MM        | 8.4             | 6                      | 2.5×20     |                                              |
| SZK-7MM        | 9.7             | 7                      | 2.5×20     |                                              |
| SZK-8MM        | 13              | 8                      | 2.5×22     |                                              |
| SZK-9MM        | 13              | 9                      | 2.5×22     |                                              |
| SZK-10MM       | 13              | 10                     | 2.5×25     |                                              |
| SZK-12MM       | 16              | 12                     | 2.5×27     |                                              |
| SZK-14MM       | 18.5            | 14                     | 2.5×27     |                                              |
| SZK-16MM       | 21              | 16                     | 3.0×37     |                                              |
| SZK-22MM       | 26              | 22                     | 3.0×41     |                                              |
| SZK-25MM       | 31              | 25                     | 3.0×47     |                                              |



扁型钢钉线卡

- 本系列线卡均采用PE(白色、灰色)料注射成功，弹性大，耐冲击，绝不破裂。
- 本系列线卡，均为插钉式，钢钉直接附在线卡上，可大量节省工时，降低施工成本。

Flat Cable Clips


- PE(white, grey), elasticity and shock resisting.
- Inserting type, nail attached in clips. Save time and cost.



| 编号<br>ITEM.NO. | 高 ( H )<br>(mm) | A    | B   | 钢钉<br>NAIL | 颜色<br>Color                                  |
|----------------|-----------------|------|-----|------------|----------------------------------------------|
| SZF-2.5MM      | 3.5             | 2    | 2.5 | 1.4×15     | WHITE<br>GREY<br>BLACK<br>BROWN<br>DARK GREY |
| SZF-4MM        | 5.5             | 3.5  | 4   | 1.7×14     |                                              |
| SZF-5MM        | 5.5             | 3.5  | 5   | 1.7×14     |                                              |
| SZF-6MM        | 6               | 4.1  | 6   | 1.7×16     |                                              |
| SZF-7MM        | 6.5             | 4.7  | 7   | 1.8×17     |                                              |
| SZF-8MM        | 7               | 5    | 8   | 2.1×19     |                                              |
| SZF-9MM        | 8               | 5.4  | 9   | 2.1×19     |                                              |
| SZF-10MM       | 8               | 5.6  | 10  | 2.1×19     |                                              |
| SZF-12MM       | 8.5             | 5.6  | 12  | 2.3×22     |                                              |
| SZF-14MM       | 10              | 7    | 14  | 2.3×22     |                                              |
| SZF-18MM       | 12.5            | 8.5  | 18  | 2.6×27     |                                              |
| SZF-19MM       | 14              | 10.5 | 19  | 2.6×27     |                                              |

Cable Clips

Coaxial Cable Clips

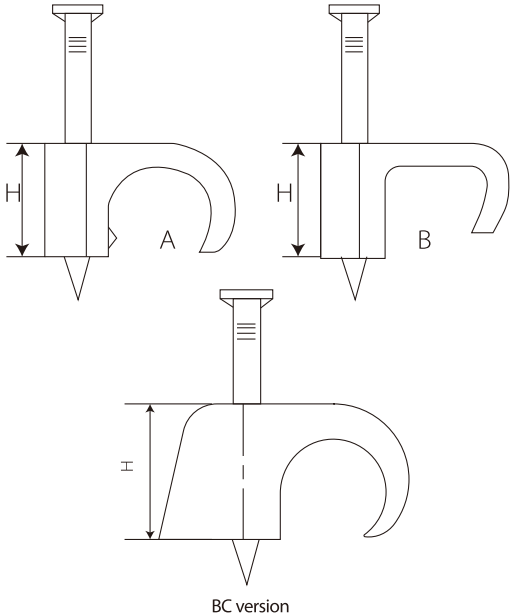

钩型钢钉线卡

- 本系列线卡均采用PE(白色、灰色)料注射成功，弹性大，耐冲击，绝不破裂。
- 本系列线卡，均为插钉式，钢钉直接附在线卡上，可大量节省工时，降低施工成本。

Coaxial Cable Clips

- PE, elasticity and shock resisting.
- Inserting type, nail attached in clips. Save time and cost.



| 编号<br>ITEM.NO. | 宽度 ( W )<br>(mm) | 高 ( H )<br>(mm) | 钢钉<br>NAIL | 形状<br>TYPE |
|----------------|------------------|-----------------|------------|------------|
| NC3-5          | 3-5              | 5               | 1.2×20     | A          |
| NC5-7          | 5-7              | 7.9             | 1.2×20     |            |
| NC7-10         | 7-10             | 10.3            | 1.6×25     |            |
| NC8-12         | 8-12             | 11.8            | 2.0×31     |            |
| NC10-14        | 10-14            | 13              | 2.0×31     |            |
| NC14-20        | 14-20            | 16.5            | 2.1×35     | B          |
| NC3×5          | 3×5              | 55.8            | 1.2×20     |            |
| NC4×6          | 4×6              | 7.6             | 1.6×16     |            |
| NC6×9          | 6×9              | 7.5             | 1.6×24     | A          |
| NC-0406A       | 4-6              | 7.5             | 1.6*16     |            |
| NC-0407        | 4-7              | 7.5             | 1.8*20     |            |
| NC-0607        | 6-7              | 12              | 2.1*19     |            |
| NC-0812        | 8-12             | 15.5            | 2.1*25     |            |
| NC-1216        | 12-16            | 19              | 2.3*32     | B          |
| NC-1619        | 16-19            | 22.5            | 2.6*38     |            |
| NC-2025        | 20-25            | 7.5             | 2.6*40     |            |
| NC-0406B       | 4-6              | 7.3             | 1.6*16     | B          |
| NC-0508        | 5-8              | 8.3             | 2.1*25     |            |
| NC-0610        | 6-10             | 4               | 2.1*25     |            |
| BC-0204        | 2-4              | 6               | 1.6*15     | BC version |
| BC-0407        | 4-7              | .8              | 1.8*26     |            |
| BC-0712        | 7-12             | 10              | 1.9*30     |            |
| BC-1014        | 10-14            | 11.6            | 1.9*30     |            |





Cable Clips

TE Cable Clips

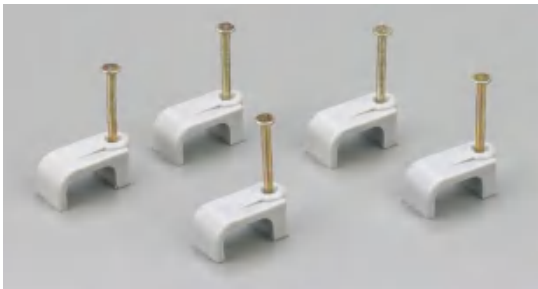

TE型线卡 Twin& Earth Cable Clips

| 编号<br>ITEM.NO.    | 高 (H)<br>(mm) | A   | B  | 钢钉<br>NAIL |
|-------------------|---------------|-----|----|------------|
| TE-1.5            | 7.3           | 4.5 | 9  | 2.1*23     |
| TE-2.5            | 8.2           | 5.5 | 10 | 2.1*23     |
| TE-4              | 8.5           | 5.6 | 12 | 2.1*23     |
| TE-6              | 10.5          | 7   | 14 | 2.1*28     |
| TE-10             | 11.5          | 8.5 | 17 | 2.1*28     |
| TED-1.5<br>DOUBLE | 7.3           | 4.9 | 17 | 2.1*23     |
| TED-2.5<br>DOUBLE | 8.4           | 5.8 | 20 | 2.1*23     |

各类包装图 Support Customization



03  
Three




WIRING ACCESSORIES  
配线器材系列





Nylon Cable Glands

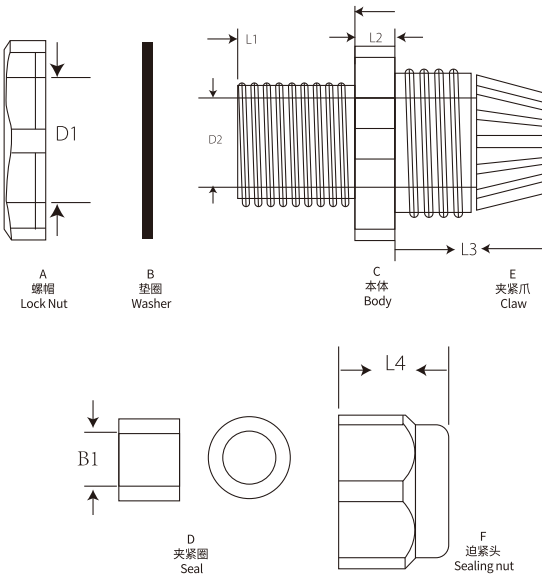

尼龙电缆固定头(英制)

- 材质：UL尼龙6/6，防火等级94V-2，夹紧圈为耐由橡胶材质。
- 特点：
  - 1、夹紧圈经特殊设计，拉力强，对电机不造成损伤。
  - 2、不须将固定头解体，电缆可直接穿入上紧即可，省时方便。
- 用途：一般机械控制箱、配电盘、机器、电器等电缆固定用。

Nylon Cable Glands

- Material: made from UL Nylon 66, 94V-2 and tight ring from rubber.
- Feature:
  1. Special designation, good strengthsile and none damage to electrical machine.
  2. not need to dismetgrate the fix terminal, cable can be inserted through directly then tighten easy and save time.
- Application: used for machinery control box, distribution plate, machine and electrical, etc.

| 编号<br>ITEM.NO. | D1   | D2   | L1   | L2  | L3   | L4   | B1   | 范围<br>Cable Range |
|----------------|------|------|------|-----|------|------|------|-------------------|
| PG-07          | 12.1 | 8.7  | 8.3  | 5   | 15   | 13.8 | 6.9  | 3.5-6             |
| PG-09          | 16.2 | 11.1 | 8.7  | 4.6 | 16.1 | 15.7 | 8.9  | 4-8               |
| PG-11          | 18.2 | 13.4 | 8.7  | 5.1 | 18.1 | 17.9 | 11.3 | 5-10              |
| PG-13.5        | 20.1 | 15.5 | 8.9  | 5   | 19.2 | 18.3 | 12.8 | 6-12              |
| PG-16          | 22.3 | 17.6 | 11.3 | 5.2 | 20.2 | 18.1 | 13.7 | 10-14             |
| PG-19          | 24.1 | 19.1 | 11.1 | 5.1 | 21.1 | 20.5 | 15.8 | 12-15             |
| PG-21          | 26.7 | 21.4 | 11.1 | 5.1 | 23   | 22.0 | 17.4 | 13-18             |
| PG-25          | 30.1 | 24.8 | 12.8 | 5.8 | 23.9 | 23.7 | 23.1 | 15-22             |
| PG-29          | 35.9 | 28.8 | 11.9 | 6.9 | 24.4 | 23.5 | 25.3 | 18-25             |
| PG-36          | 46.4 | 39.1 | 16.0 | 7.8 | 30.7 | 27.3 | 31.9 | 22-32             |
| PG-42          | 53.9 | 46.7 | 15.4 | 7.9 | 33.2 | 28.5 | 37.1 | 30-38             |
| PG-48          | 60.2 | 52.6 | 18.0 | 7.9 | 35.5 | 30.3 | 45.1 | 34-44             |
| PG-63          | 70.6 | 63.9 | 28.9 | 8.9 | 41.4 | 41.3 | 49.3 | 42-54             |

| 编号<br>ITEM.NO. | D1 | D2   | L1   | L4   | B1   | 范围<br>Cable Range |
|----------------|----|------|------|------|------|-------------------|
| M12X1.5        | 12 | 8.3  | 7.9  | 13.3 | 6    | 3-6.5             |
| M16X1.5        | 16 | 10.9 | 9    | 15.5 | 9.6  | 5-10              |
| M20SX1.5       | 20 | 14.8 | 9    | 15.8 | 12.5 | 3-7               |
| M20X1.5        | 20 | 14.8 | 9    | 16.5 | 12.5 | 6-12              |
| M20LX1.5       | 20 | 15.5 | 15   | 18.4 | 14.5 | 10-14             |
| M25X1.5        | 25 | 21   | 13   | 20.6 | 18.4 | 13-18             |
| M32X1.5        | 32 | 26   | 13   | 25.2 | 26.2 | 18-25             |
| M40X1.5        | 40 | 33   | 18   | 28   | 33.4 | 25-32             |
| M50X1.5        | 50 | 42.5 | 18   | 31.6 | 36.5 | 30-38             |
| M63X1.5        | 63 | 54.1 | 18.5 | 32.6 | 44   | 34-44             |

Brass Cable Glands

铜电缆固定头

- 产品材质：接头主体部位采用黄铜镀镍制成，夹紧件采用尼龙塑料(PA)制成，密封件和O型密封圈均采用丁睛胶(NBR)制成。
- 产品认证：欧洲CE认证、欧洲ROHS认证、欧洲REACH认证。防护等级：在规定的卡口范围内，并使用O型密封圈旋紧迫紧头，达到IP68-10巴压力。
- 工作温度：静态:-40℃到100℃，短时间达120℃;动态:-20℃到80℃，短时间达100℃特别定制。
- 产品特性：特殊夹紧爪与夹紧圈凹凸相扣之设计，配合迫紧头装配时便利，夹紧电缆范围大、抗拉力强、可防水、防尘、抗盐、耐酸碱、酒精、油脂及一般溶剂。
- 使用方法：金属电缆防水接头是电缆的配套产品，接头可将电缆锁紧，另一端可接入设备箱体上，也可以根据选用螺纹接入进出口为内螺纹的电动设备上。
- 更多选择：可根据客户实际需要，需要订购时欢迎来电咨询。

Copper Cable Fixed Head


- Material: Body: Nickel-plated brass.
- Seal: PA66,Sealing: NBR.
- Certification: CE,ROHS,REACH.
- Protection rating:IP68.
- Operating Temperature: Static condition: -40°c to 100°c, short-time.
- 120°c Dynamic condition: -20°c to 80°c, short time 100°c.
- Thread length: Standard thread type is suitable for equipment with interal thread or with thin plate. Longer thread type is suitable for thick plate.
- Feature: special design of the clamp and seals, extremely easy installation, suit for wide range of cable, strong stretching resistance, waterproof, dust proof, resist to salt, acid, alcohol, grease and other solvent.
- Application: fix the cable gland on the plate, insert cable through the assembled gland and tighten gland locknut until cable is secured.
- Notes: Customization is available.



| 编号<br>ITEM.NO. | 适用电缆<br>(mm)<br>Cable range | 螺纹外径<br>(mm)<br>Thread O. D. | 机板口径<br>(mm)<br>Mounting hole diameter | 螺纹长度<br>GL (mm)Thread length GL | 接合长度<br>H (mm) Joint length H | 扳手径<br>(mm)<br>Spanner |
|----------------|-----------------------------|------------------------------|----------------------------------------|---------------------------------|-------------------------------|------------------------|
| M8 x 1         | 5.5-2                       | 8                            | 8-8.2                                  | 5                               | 16                            | 12                     |
| M10 x 1        | 6-3                         | 10                           | 10-10.2                                | 7                               | 19                            | 14                     |
| M12 x 1.5      | 6.5-3                       | 12                           | 12-12.2                                | 7                               | 19                            | 14                     |
| M14 x 1.5      | 8-4                         | 14                           | 14-14.2                                | 7                               | 19                            | 17                     |
| M16 x 1.5      | 8-4                         | 16                           | 16-16.2                                | 8                               | 20                            | 18                     |
| M18 x 1.5      | 10-5                        | 18                           | 18-18.2                                | 8                               | 21                            | 20                     |
| M20 x 1.5      | 12-6                        | 20                           | 20-20.2                                | 8                               | 22                            | 22                     |
| M22 x 1.5      | 14-10                       | 22                           | 22-22.2                                | 8                               | 23                            | 24                     |
| M24 x 1.5      | 14-10                       | 24                           | 24-24.2                                | 9                               | 25                            | 24/27                  |
| M25 x 1.5      | 14-10                       | 25                           | 25-25.2                                | 9                               | 25                            | 24/27                  |
| M27 x 1.5      | 18-13                       | 27                           | 27-27.2                                | 9                               | 27                            | 30                     |
| M28 x 1.5      | 18-13                       | 28                           | 28-28.2                                | 9                               | 27                            | 30                     |
| M30 x 1.5      | 18-13                       | 30                           | 30-30.2                                | 9                               | 29                            | 30/32                  |
| M32 x 1.5      | 22-15                       | 32                           | 32-32.2                                | 10                              | 29                            | 35                     |
| M36 x 1.5      | 25-18                       | 36                           | 36-36.2                                | 10                              | 31                            | 40                     |
| M40 x 1.5      | 25-18                       | 40                           | 40-40.2                                | 11                              | 31                            | 40/45                  |
| M42 x 1.5      | 30-22                       | 42                           | 42-42.2                                | 11                              | 37                            | 45                     |
| M48 x 1.5      | 33-25                       | 48                           | 48-48.2                                | 11                              | 37                            | 50/52                  |
| M50 x 1.5      | 38-32                       | 50                           | 50-50.2                                | 12                              | 37                            | 50/52                  |
| M54 x 1.5      | 38-32                       | 54                           | 54-54.2                                | 12                              | 38                            | 57                     |
| M60 x 1.5      | 44-37                       | 60                           | 60-60.2                                | 13                              | 38                            | 64                     |
| M63 x 1.5      | 44-37                       | 63                           | 63-63.2                                | 13                              | 38                            | 64/68                  |
| PG7            | 6.5-3                       | 12.5                         | 12.5-12.7                              | 7                               | 19                            | 14                     |
| Pg9            | 8-4                         | 15.2                         | 15.2-15.4                              | 8                               | 20                            | 17                     |
| Pg11           | 10-5                        | 18.6                         | 18.6-18.8                              | 8                               | 21                            | 20/21                  |
| PG13.5         | 12-6                        | 20.4                         | 20.4-20.6                              | 8                               | 22                            | 22                     |
| Pg16           | 14-10                       | 22.5                         | 22.5-22.7                              | 9                               | 23                            | 24                     |
| Pg19           | 14-10                       | 25                           | 25-25.2                                | 9                               | 25                            | 24/27                  |
| Pg21           | 18-13                       | 28.3                         | 28.3-28.5                              | 9                               | 27                            | 30                     |
| Pg25           | 22-15                       | 32                           | 32-32.2                                | 10                              | 29                            | 35                     |
| Pg29           | 25-18                       | 37                           | 37-37.2                                | 11                              | 31                            | 40                     |
| Pg36           | 33-25                       | 47                           | 47-47.2                                | 12                              | 37                            | 50                     |
| Pg42           | 38-32                       | 54                           | 54-54.2                                | 13                              | 38                            | 57                     |
| Pg48           | 44-37                       | 59.3                         | 59.3-59.5                              | 14                              | 38                            | 64                     |
| PG63           | 52-42                       | 72                           | 72                                     | 15                              | 42                            | 77                     |



Nylon Cable Glands

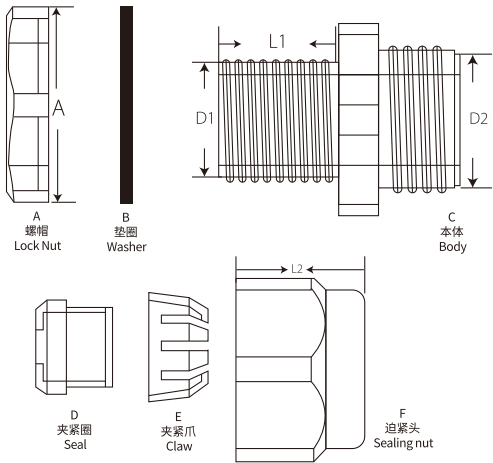

本公司热忱欢迎新老客户来样,来图或来模委托加工各种固定头。 We welcome OEM orders for cable glands by samples, drawing or molds.

尼龙电缆固定头(公制)



- 螺牙规格: 公制牙(METRIC)
- 颜色种类: 黑色及灰色
- 工作温度: -40℃至100℃或瞬间可耐熟至120℃
- 安装方式: 直接安装于相同牙规之机板上, 由另一端将电 缆穿入固定头通孔内, 再将迫紧螺帽上紧即可, 免拆零件省时便利。
- 产品特性: 特殊夹紧爪与夹紧圈之设计, 夹紧电缆范围大, 抗拉力特强并具保护电缆作用, 可防水、防尘、盐、耐弱酸、酒精、油、油脂及一般溶剂。

Nylon Cable Glands (metric) (divided Type)

- Threaded entry: Metric
- Color : black and grey
- Working temperature: -40°C-100°C, the item can also endure 120°C instantly.
- Protection: IP68
- Standard: IEC698

| 编号<br>ITEM.NO. | Threaded<br>entry<br>metric (mm) | Cable range<br>Φ(mm) | D1<br>(mm) | D2<br>(mm) | Panel<br>mounting<br>hole<br>(mm) | L1<br>(mm) | L2<br>(mm) | A<br>(mm) |
|----------------|----------------------------------|----------------------|------------|------------|-----------------------------------|------------|------------|-----------|
| MG-12          | M12×1.25                         | 7.6-4.6              | 12         | M16×1.5    | 12.5                              | 8.5        | 16         | 19        |
| MG-16          | M16×1.5                          | 10-6                 | 16         | M20×1.5    | 16.5                              | 15         | 19.5       | 24        |
| MG-20          | M20×1.5                          | 14-9                 | 20         | M25×1.5    | 20.5                              | 15         | 21.5       | 30        |
| MG-25          | M25×1.5                          | 18-13                | 25         | M31×2      | 25.5                              | 15         | 24.5       | 36        |
| MG-32          | M32×1.5                          | 25-18                | 32         | M38×2      | 33                                | 15         | 27.5       | 46        |
| MG-40          | M40×1.5                          | 30-24                | 40         | M46×2      | 41                                | 20         | 31         | 54        |
| MG-50          | M50×1.5                          | 39-30                | 50         | M58×2      | 51                                | 23         | 37         | 67        |
| MG-63          | M63×1.5                          | 48.5-40              | 63         | M72×2      | 64                                | 24         | 42         | 81.5      |

Wiring Duct

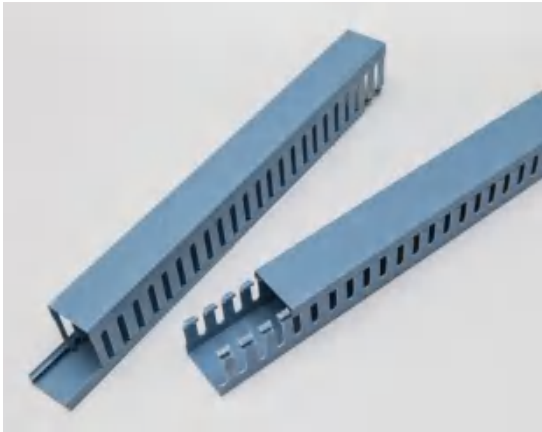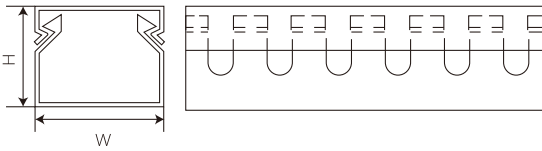

| 编号<br>ITEM.NO. | 高×宽<br>(mm) | 电线容量<br>Contained<br>Wire(1.5 <sup>2</sup> ) | 长度<br>Length |
|----------------|-------------|----------------------------------------------|--------------|
| PXC-1616       | 16x16       | 3-5PCS                                       | 2M           |
| PXC-1520       | 15x20       | 5-10PCS                                      | 2M           |
| PXC-1530       | 15x30       | 5-15PCS                                      | 2M           |
| PXC-1550       | 15x50       | 25-35PCS                                     | 2M           |
| PXC-2015       | 20x15       | 5-10PCS                                      | 2M           |
| PXC-2020       | 20x20       | 10-15PCS                                     | 2M           |
| PXC-2025       | 20x25       | 10-20PCS                                     | 2M           |
| PXC-2030       | 20x30       | 10-20PCS                                     | 2M           |
| PXC-2040       | 20x40       | 20-35PCS                                     | 2M           |
| PXC-2515       | 25x15       | 5-10PCS                                      | 2M           |
| PXC--2520      | 25x20       | 10-20PCS                                     | 2M           |
| PXC-2525       | 25x25       | 10-25PCS                                     | 2M           |
| PXC-2530       | 25x30       | 15-25PCS                                     | 2M           |
| PXC-2535       | 25x35       | 25-35PCS                                     | 2M           |
| PXC-2540       | 25x40       | 20-40PCS                                     | 2M           |
| PXC-2545       | 25x45       | 25-40PCS                                     | 2M           |
| PXC-2550       | 25x50       | 25-45PCS                                     | 2M           |
| PXC-2560       | 25x60       | 45-60PCS                                     | 2M           |
| PXC-2565       | 25x65       | 100-110PCS                                   | 2M           |

绝缘配线槽

- 材质: 南亚硬质PVC(灰色), 绝缘性良好, 不自燃, 耐温至85℃。
- 构造: 由槽底及槽盖两部分组成, 底槽两侧设出线孔。

Wiring Duct(slotted)

- Material: made from PVC(grey), good insulation and heat-resisting up to 85°C.
- Struction: made up of duct bottom and lid, with two out-holes designd at the bottom.


| 编号<br>ITEM.NO. | 高×宽<br>(mm) | 电线容量<br>Contained Wire(1.5 <sup>2</sup> ) | 长度<br>Length |
|----------------|-------------|-------------------------------------------|--------------|
| PXC-2580       | 25×80       | 120-130PCS                                | 2M           |
| PXC-3015       | 30×15       | 5-15PCS                                   | 2M           |
| PXC-3020       | 30×20       | 10-20PCS                                  | 2M           |
| PXC-3025       | 30×25       | 15-25PCS                                  | 2M           |
| PXC-3030       | 30×30       | 20-30PCS                                  | 2M           |
| PXC-3035       | 30×35       | 30-45PCS                                  | 2M           |
| PXC-3040       | 30×40       | 35-50PCS                                  | 2M           |
| PXC-3050       | 30×50       | 45-60PCS                                  | 2M           |
| PXC-3070       | 30x70       | 55-70PCS                                  | 2M           |
| PXC-3525       | 35×25       | 25-35PCS                                  | 2M           |
| PXC-3530       | 35x30       | 30-45PCS                                  | 2M           |
| PXC-3535       | 35×35       | 40-55PCS                                  | 2M           |
| PXC-3540       | 35x40       | 40-50PCS                                  | 2M           |
| PXC-3545       | 35x45       | 40-55PCS                                  | 2M           |
| PXC-3550       | 35x50       | 50-60PCS                                  | 2M           |
| PXC-3560       | 35x60       | 55-65PCS                                  | 2M           |
| PXC-3580       | 35x80       | 160-180PCS                                | 2M           |
| PXC-4025       | 40×25       | 20-40PCS                                  | 2M           |
| PXC-4030       | 40×30       | 35-50PCS                                  | 2M           |
| PXC-4035       | 40×35       | 40-50PCS                                  | 2M           |
| PXC-4040       | 40×40       | 45-55PCS                                  | 2M           |
| PXC-4050       | 40x50       | 60-70PCS                                  | 2M           |
| PXC-4060       | 40×60       | 60-80PCS                                  | 2M           |
| PXC-4080       | 40×80       | 100-120PCS                                | 2M           |
| PXC-40100      | 40x100      | 130-180PCS                                | 2M           |
| PXC-4525       | 45×25       | 25-40PCS                                  | 2M           |

## Wiring Duct

| 编号<br>ITEM.NO. | 高×宽<br>(mm) | 电线容量<br>Contained Wire(1.5 <sup>2</sup> ) | 长度<br>Length | 编号<br>ITEM.NO. | 高×宽<br>(mm) | 电线容量<br>Contained Wire(1.5 <sup>2</sup> ) | 长度<br>Length |
|----------------|-------------|-------------------------------------------|--------------|----------------|-------------|-------------------------------------------|--------------|
| PXC-4535       | 45×35       | 40-55PCS                                  | 2M           | PXC-6525       | 65×25       | 100-110PCS                                | 2M           |
| PXC-4545       | 45×45       | 60-70PCS                                  | 2M           | PXC-6545       | 65×45       | 180-200PCS                                | 2M           |
| PXC-4550       | 45×50       | 70-85PCS                                  | 2M           | PXC-6565       | 65×65       | 200-220PCS                                | 2M           |
| PXC-4560       | 45×60       | 80-90PCS                                  | 2M           | PXC-7525       | 75×25       | 110-120PCS                                | 2M           |
| PXC-4565       | 45×65       | 90-100PCS                                 | 2M           | PXC-7550       | 75×50       | 140-160PCS                                | 2M           |
| PXC-4580       | 45×80       | 180-200PCS                                | 2M           | PXC-7575       | 75×75       | 160-180PCS                                | 2M           |
| PXC-5015       | 50×15       | 25-35PCS                                  | 2M           | PXC-75100      | 75×100      | 255-295PCS                                | 2M           |
| PXC-5025       | 50×25       | 25-45PCS                                  | 2M           | PXC-75150      | 75×150      | 300-400PCS                                | 2M           |
| PXC-5030       | 50×30       | 30-55PCS                                  | 2M           | PXC-8025       | 85×25       | 60-70PCS                                  | 2M           |
| PXC-5035       | 50×35       | 50-60PCS                                  | 2M           | PXC-8025       | 80×25       | 120-130PCS                                | 2M           |
| PXC-5040       | 50×40       | 60-70PCS                                  | 2M           | PXC-8030       | 80×30       | 60-75PCS                                  | 2M           |
| PXC-5045       | 50×45       | 70-85PCS                                  | 2M           | PXC-8035       | 80×35       | 160-180PCS                                | 2M           |
| PXC-5050       | 50×50       | 90-100PCS                                 | 2M           | PXC-8040       | 80×40       | 100-120PCS                                | 2M           |
| PXC-5055       | 50×55       | 100-110PCS                                | 2M           | PXC-8045       | 80×45       | 180-200PCS                                | 2M           |
| PXC-5060       | 50×60       | 110-125PCS                                | 2M           | PXC-8050       | 80×50       | 200-220PCS                                | 2M           |
| PXC-5075       | 50×75       | 140-160PCS                                | 2M           | PXC-8055       | 80×55       | 240-290PCS                                | 2M           |
| PXC-5080       | 50×80       | 180-200PCS                                | 2M           | PXC-8060       | 80×60       | 250-300PCS                                | 2M           |
| PXC-50100      | 50×100      | 220-250PCS                                | 2M           | PXC-8080       | 80×80       | 280-350PCS                                | 2M           |
| PXC-5550       | 55×50       | 100-110PCS                                | 2M           | PXC-80100      | 80×100      | 300-400PCS                                | 2M           |
| PXC-5580       | 55×80       | 240-290PCS                                | 2M           | PXC-80120      | 80×120      | 310-410PCS                                | 2M           |
| PXC-6020       | 60×20       | 35-50PCS                                  | 2M           | PXC-10025      | 100×25      | 100-110PCS                                | 2M           |
| PXC-6025       | 60×25       | 45-60PCS                                  | 2M           | PXC-10033      | 100×33      | 110-120PCS                                | 2M           |
| PXC-6030       | 60×30       | 55-65PCS                                  | 2M           | PXC-10040      | 100×40      | 130-180PCS                                | 2M           |
| PXC-6035       | 60×35       | 55-65PCS                                  | 2M           | PXC-10050      | 100×50      | 210-250PCS                                | 2M           |
| PXC-6040       | 60×40       | 90-100PCS                                 | 2M           | PXC-10060      | 100×60      | 230-270PCS                                | 2M           |
| PXC-6045       | 60×45       | 80-90PCS                                  | 2M           | PXC-10070      | 100×70      | 250-290PCS                                | 2M           |
| PXC-6050       | 60×50       | 110-125PCS                                | 2M           | PXC-10080      | 100×80      | 300-380PCS                                | 2M           |
| PXC-6060       | 60×60       | 140-160PCS                                | 2M           | PXC-100100     | 100×100     | 300-400PCS                                | 2M           |
| PXC-6080       | 60×80       | 250-300PCS                                | 2M           | PXC-130100     | 100×130     | 350-500PCS                                | 2M           |
| PXC-60100      | 60×100      | 230-270PCS                                | 2M           | PXC-140×35     | 140×35      | 200-220PCS                                | 2M           |

• 特殊规格欢迎订做 (SUPPORT CUSTOMIZATION)

## Wiring Duct

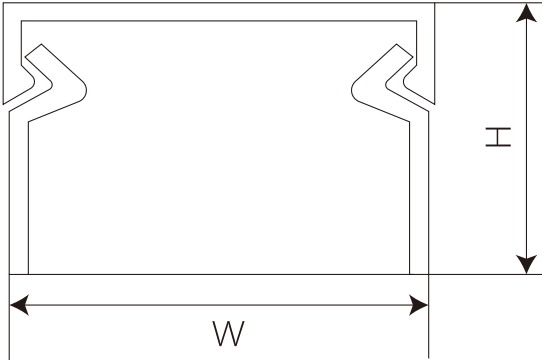

### 装潢配线槽

- 材质：PVC（白色），绝缘性能好，耐温85℃。
- 结构：由管道底部和盖子组成。
- 用途：用于舞台，电动，空调或室内。
- 特点：坚固的设计，特别适用于防尘和防鼠。

### Wing Duct(Solid)


- Material: made from PVC(WHITE),good insulation and heat resisting up to 85℃.
- Struction: made up of duct bottom and lid.
- Application: used in stage, electric, air conditioning or indoors.
- Feature: solid design, especially for anti-dust and mouse.



| 编号<br>ITEM.NO. | 高×宽<br>(mm) | 电线容量<br>Contained Wire(1.5 <sup>2</sup> ) | 长度<br>Length |
|----------------|-------------|-------------------------------------------|--------------|
| PZC-0812       | 8×12        | 2-4PCS                                    | 2M           |
| PZC-1015       | 10×15       | 3-5PCS                                    | 2M           |
| PZC-1020       | 10×20       | 3-6PCS                                    | 2M           |
| PZC-1025       | 10×25       | 5-10PCS                                   | 2M           |
| PZC-1220       | 12×20       | 3-8PCS                                    | 2M           |
| PZC-1525       | 15×25       | 5-10PCS                                   | 2M           |
| PZC-1616       | 16×16       | 5-10PCS                                   | 2M           |
| PZC-1625       | 16×25       | 5-12PCS                                   | 2M           |
| PZC-1638       | 16×38       | 12-30PCS                                  | 2M           |
| PZC-2030       | 20×30       | 10-20PCS                                  | 2M           |
| PZC-2035       | 20×35       | 15-25PCS                                  | 2M           |
| PZC-2050       | 20×50       | 20-40PCS                                  | 2M           |
| PZC-2525       | 25×25       | 10-25PCS                                  | 2M           |
| PZC-2540       | 25×40       | 20-40PCS                                  | 2M           |
| PZC-3050       | 30×50       | 30-50PCS                                  | 2M           |
| PZC-3060       | 30×60       | 55-65PCS                                  | 2M           |
| PZC-5050       | 50×50       | 80-90PCS                                  | 2M           |
| PZC-5080       | 50×80       | 180-200PCS                                | 2M           |
| PZC-50100      | 50×100      | 220-250PCS                                | 2M           |
| PZC-6060       | 60×60       | 120-135PCS                                | 2M           |
| PZC-60100      | 60×100      | 240-290PCS                                | 2M           |
| PZC-80100      | 80×100      | 260-350PCS                                | 2M           |
| PZC-100100     | 100×100     | 300-400PCS                                | 2M           |




## Wiring Duct

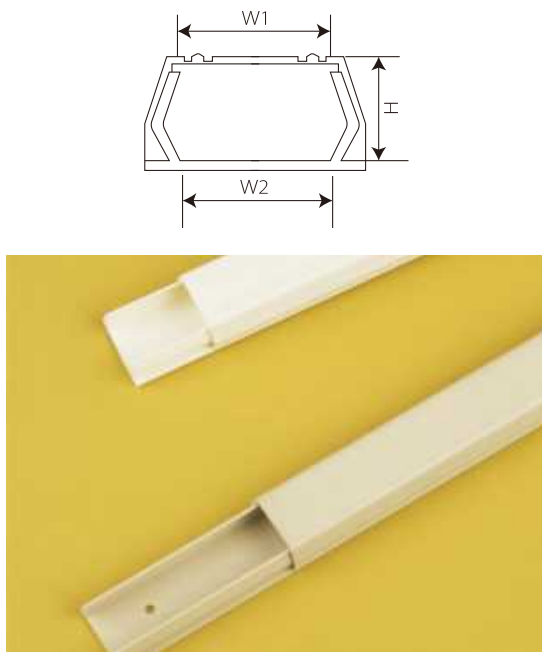

### 日式电话配线槽 Telephone Wiring Duct (self-adhesive)

- Material: made from PVC(WHITE),good insulation and heatresisting up to 85°C.
- Feature: spacious designed,and the strong adhesive tape in the duct button.

| 编号<br>ITEM.NO. | 宽<br>W1(mm) | 宽<br>W2(mm) | 高<br>H(mm) | 长度<br>Length                    |
|----------------|-------------|-------------|------------|---------------------------------|
| JTD-1          | 10.4        | 7.3         | 8.0        | 1 meter/pc<br>每只1M<br>( 背附双面胶 ) |
| JTD-2          | 14.5        | 11.8        | 8.0        |                                 |
| JTD-3          | 17.5        | 15.6        | 11.0       |                                 |
| JTD-4          | 23.5        | 19.5        | 12.2       |                                 |

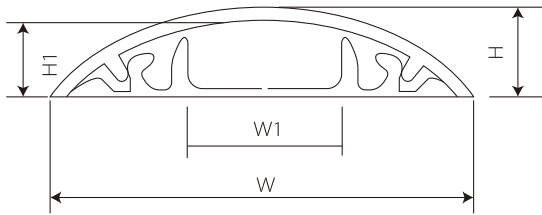



- ### 弧形配线槽
- 材料：高冲击，刚性，阻燃P.V.C。
  - 使用温度：85°C。
  - 背面采用优质双面胶带粘贴。适合地板使用，方便小车通行，防止绊倒。

- ### Round Type Wiring Duct
- Material: High impact, rigid, self-extinguishing PVC.
  - Working temperature: 85°C.
  - Backed with high quality double sided tape for permanent stick. Good for floor witing to facilitate trolley pass and to avoid trip.

| 编号<br>ITEM.NO. | 外宽<br>W(mm) | 内宽<br>W1(mm) | 外高<br>H(mm) | 内高<br>H1(mm) | 长度<br>Length |
|----------------|-------------|--------------|-------------|--------------|--------------|
| K-RTD-2        | 20.0        | 8.0          | 6.0         | 4.0          | 2M           |
| K-RTD-3        | 30.0        | 11.0         | 8.0         | 6.0          | 2M           |
| K-RTD-4        | 40.0        | 16.0         | 9.5         | 7.0          | 2M           |
| K-RTD-5        | 50.0        | 20.0         | 11.0        | 8.0          | 2M           |
| K-RTD-6        | 60.0        | 30.0         | 13.0        | 9.0          | 2M           |
| K-RTD-7        | 70.0        | 40.0         | 15.0        | 10.0         | 2M           |
| K-RTD-9        | 90.0        | 45.0         | 19.0        | 15.0         | 2M           |
| K-RTD-12       | 120.0       | 70.0         | 25.0        | 21.0         | 2M           |
| H-RTD-3.5      | 35.0        | 20.0         | 10.0        | 7.0          | 2M           |
| H-RTD-4.5      | 45.0        | 28.0         | 12.5        | 9.5          | 2M           |
| H-RTD-7        | 70.0        | 44.0         | 16.0        | 12.5         | 2M           |
| E-RTD-3        | 30.0        | 12.5         | 8.5         | 5.5          | 2M           |
| E-RTD-5        | 50.0        | 27.0         | 13.0        | 9.5          | 2M           |
| E-RTD-7        | 70.0        | 36.0         | 16.0        | 12.0         | 2M           |



## Wiring Duct

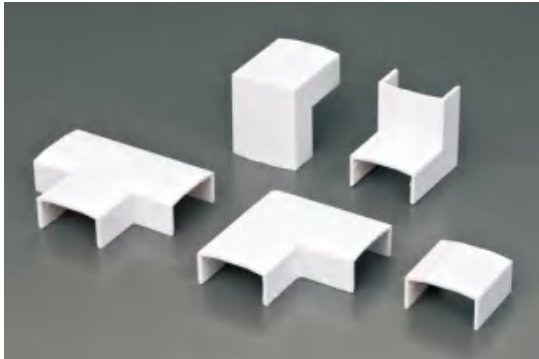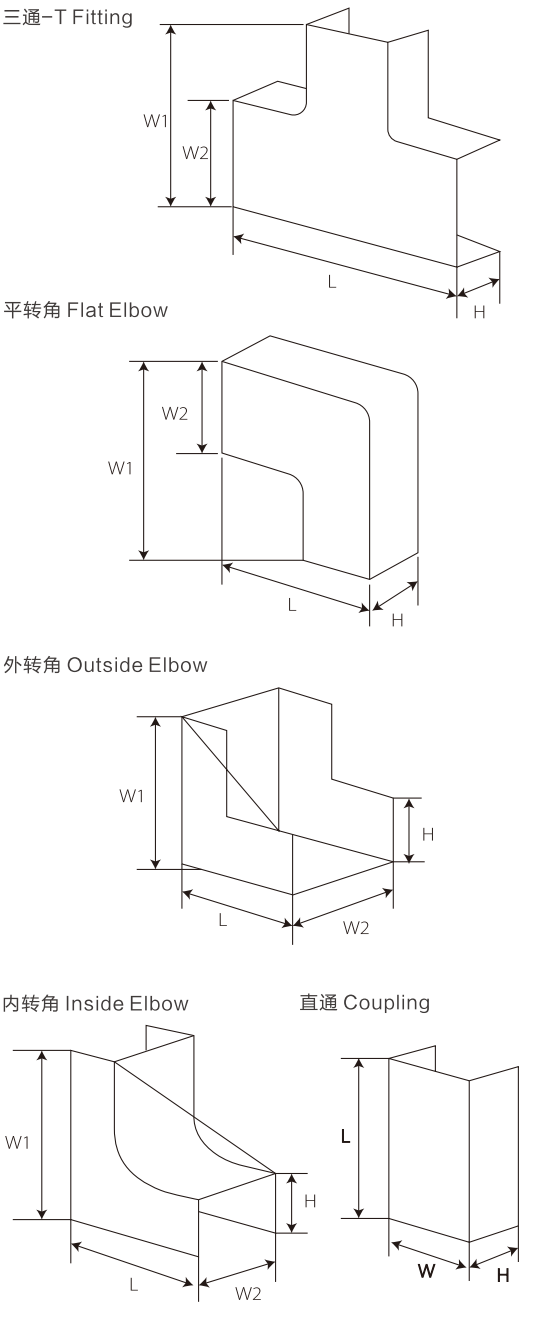

### 线槽配件 Wiring Duct Accessories

#### 三通 T-fitting

| 编号<br>ITEM.NO. | L(mm) | W1(mm) | W2(mm) | H(mm) |
|----------------|-------|--------|--------|-------|
| FT-24ST        | 57    | 42     | 27.1   | 16.7  |
| FT-30ST        | 75    | 58     | 33     | 17    |
| FT-40ST        | 96    | 69.8   | 43.6   | 21.8  |

#### 平转角 Flat Elbow

| 编号<br>ITEM.NO. | L(mm) | W1(mm) | W2(mm) | H(mm) |
|----------------|-------|--------|--------|-------|
| FA-24WT        | 42.2  | 42.2   | 27.1   | 16.7  |
| FA-30WT        | 59.5  | 59.5   | 33     | 17    |
| FA-40WT        | 70    | 70     | 43.6   | 21.8  |

#### 外转角 Outside Elbow

| 编号<br>ITEM.NO. | L(mm) | W1(mm) | W2(mm) | H(mm) |
|----------------|-------|--------|--------|-------|
| PMC-24WW       | 36.7  | 36.7   | 27.1   | 16.7  |
| PMC-30WW       | 43    | 43     | 33     | 17    |
| PMC-40WW       | 51.8  | 51.8   | 43.6   | 21.8  |

#### 内转角 Inside Elbow


| 编号<br>ITEM.NO. | L(mm) | W1(mm) | W2(mm) | H(mm) |
|----------------|-------|--------|--------|-------|
| PMC-24NW       | 36.7  | 36.7   | 27.1   | 16.7  |
| PMC-30NW       | 41    | 41     | 33     | 17    |
| PMC-40NW       | 51.8  | 51.8   | 43.6   | 21.8  |

#### 直通 Coupling

| 编号<br>ITEM.NO. | L(mm) | W1(mm) | H(mm) |
|----------------|-------|--------|-------|
| PMC-24ZT       | 30    | 27.1   | 16.7  |
| PMC-30ZT       | 41    | 33     | 17    |
| PMC-40ZT       | 43    | 43.6   | 21.8  |



## Expand Plugs

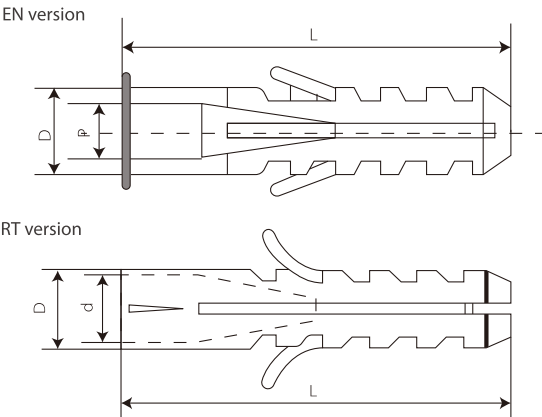

### 膨胀管

- 材质: 采用PE料制成。
- 颜色: 白、灰。

#### Expand Plugs

- Material: made of PE.
- Color: White, Grey.

| 编号<br>ITEM.NO. | 长(L)<br>(mm) | 外径(D)<br>(mm) | 内径(d)<br>(mm) | 螺丝钉<br>SCREW<br>(mm) |
|----------------|--------------|---------------|---------------|----------------------|
| EN-5*25        | 25.0         | 5.0           | 3.5           | Ø3.5×25              |
| EN-6*30        | 30.0         | 6.0           | 5.0           | Ø4×30                |
| EN-7*35        | 35.0         | 7.0           | 5.6           | Ø4×35                |
| EN-8*40        | 40.0         | 8.0           | 5.4           | Ø5×40                |
| EN-10*50       | 50.0         | 10.0          | 8.5           | Ø6×50                |
| EN-12*60       | 60.0         | 12.0          | 9.8           | Ø6×60                |
| EN-14*75       | 75.0         | 14.0          | 11.5          | Ø9×75                |
| RT-5*25        | 25.0         | 5.0           | 3.5           | Ø3.5×25              |
| RT-6*30        | 30.0         | 6.0           | 5.0           | Ø4×30                |
| RT-7*35        | 35.0         | 7.0           | 5.8           | Ø4×35                |
| RT-8*40        | 40.0         | 8.0           | 6.5           | Ø5×40                |
| RT-10*50       | 50.0         | 10.0          | 8.5           | Ø6×50                |
| RT-12*60       | 60.0         | 12.0          | 10.1          | Ø7×60                |
| RT-14*75       | 75.0         | 14.0          | 11.5          | Ø9×75                |
| EN-08L         | 78.0         | 8.0           | 6.0           | Ø5.5×85              |
| EN-10L         | 99.0         | 10.0          | 7.5           | Ø7.0×102             |



### 塑料十字架

- 材质: 聚乙烯(PE)。
- 用途: 调整瓷砖中间缝隙大小, 使瓷砖贴的规整漂亮, 使瓷砖之间的缝隙一致。

#### Plastic Cross

- Material: PE.
- Usage: Adjust the size of the gap of the tiles to make the gap between the tiles same.make tiles beautiful.

| SIZE | 1.0mm | 1.5mm | 2.0mm | 2.5mm | 3.0mm  |
|------|-------|-------|-------|-------|--------|
|      | 4.0mm | 5.0mm | 6.0mm | 8.0mm | 10.0mm |

## Cable Tie Holder



### 瓷砖楔子

- 材质: 聚丙烯(PP)。
- 颜色: 红色,黄色。
- 特点: 与瓷砖底座配套使用, 有效提高瓷砖铺贴速度, 方便瓷砖直接找平。

#### Tile Leveling Wedge



- Material: PP.
- Color: Red, Yellow.
- Usage: Used with the tile base to effectively increase the speed of tile placement and facilitate tile leveling efficiently.

### 扎带固定座

- 材质: 采用PA料制成。
- 颜色: 白、黑。

#### Cable Tie Holder


- Material: made of PA.
- Color: White, Black.

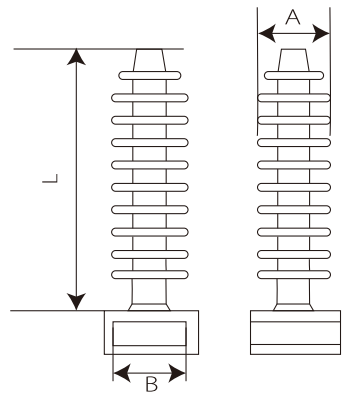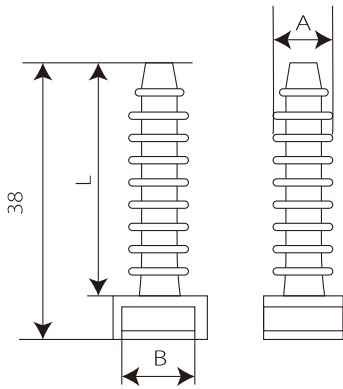

| 编号<br>ITEM.NO. | A<br>(mm) | B<br>(mm) | L<br>(mm) | 包装<br>Packing |
|----------------|-----------|-----------|-----------|---------------|
| SZS-6          | Ø8        | 9.8       | 32.0      | 100 PCS       |
| SZS-8          | Ø10       | 9.8       | 36.0      | 100 PCS       |




Cable Tie Holder

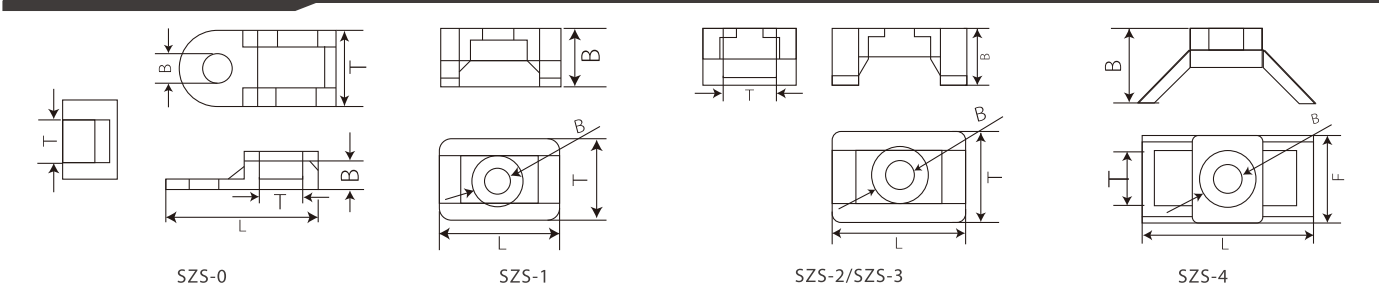

扎带固定座  
Cable Tie Holder


| 编号<br>ITEM.NO. | H<br>(mm) | L<br>(mm) | W<br>(mm) | 带孔T<br>(mm) | 固定孔B<br>(mm) |
|----------------|-----------|-----------|-----------|-------------|--------------|
| SZS-0          | 5.0       | 19.5      | 9.8       | 5.5         | 3.5          |
| SZS-1          | 7.0       | 15.0      | 10.2      | 5.0         | 3.3          |
| SZS-2          | 9.5       | 22.0      | 16.0      | 9.0         | 6.3          |
| SZS-3          | 9.5       | 22.0      | 16.0      | 9.0         | 5.3          |
| SZS-4          | 12.0      | 29.0      | 15.0      | 9.4         | 5.3          |

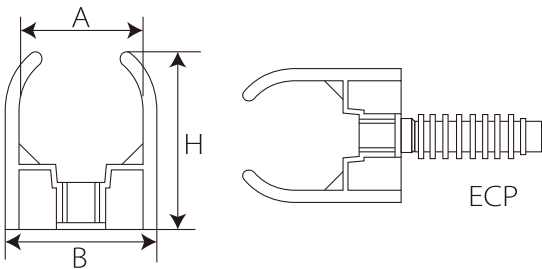

马鞍型管夹  
SaddleType Clips


| 编号<br>ITEM.NO. | A<br>(mm) | B<br>(mm) | H<br>(mm) | + CTH-3A |
|----------------|-----------|-----------|-----------|----------|
| SCP-16         | 16        | 22        | 26        | ECP-16   |
| SCP-20         | 20        | 26        | 28        | ECP-20   |
| SCP-25         | 25        | 30        | 35        | ECP-25   |
| CCP-16         | 16        | 21        | 24.5      | /        |
| CCP-20         | 20        | 25.4      | 28        | /        |
| CCP-25         | 25        | 31        | 30.2      | /        |
| CCP-32         | 32        | 44        | 43.2      | /        |

Clips

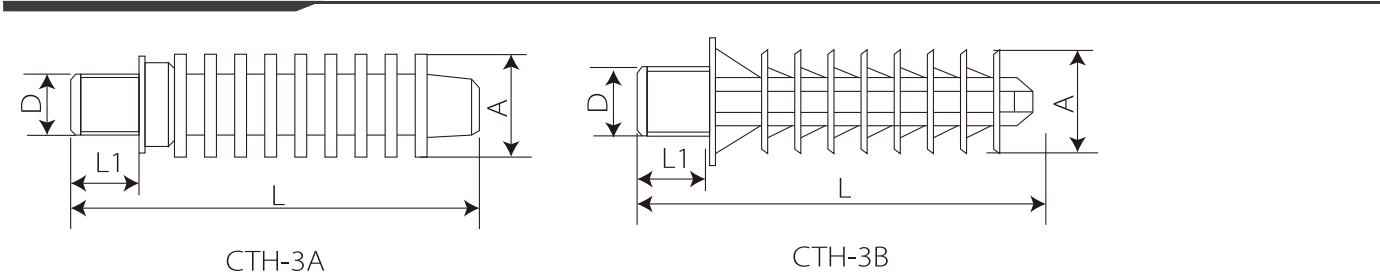


扎带固定头  
Cable Tie Holder

| 编号<br>ITEM.NO. | L<br>(mm) | L1<br>(mm) | A<br>(mm) | 孔径D<br>(mm) |
|----------------|-----------|------------|-----------|-------------|
| CTH-3A         | 38.0      | 6.0        | 10.0      | M7×1.5      |
| CTH-3B         | 39.0      | 7.0        | 10.0      | M6×1.5      |



固定锁式管夹  
Saddle Mounting Clip

| 编号<br>ITEM.NO. | A<br>(mm) | B<br>(mm) | H<br>(mm) | 卡管圆径<br>(mm) |
|----------------|-----------|-----------|-----------|--------------|
| SMT-1          | 15.4      | 12.4      | 74        | 16/20        |
| SMT-2          | 15.4      | 12.4      | 90        | 25           |

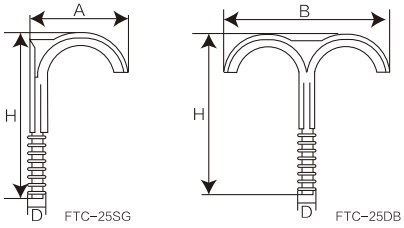


F型管夹  
F-TYPE Clips

| 编号<br>ITEM.NO. | H<br>(mm) | A<br>(mm) | B<br>(mm) | D<br>(mm) |
|----------------|-----------|-----------|-----------|-----------|
| FTC-25SG       | 62.5      | 35.0      | /         | 6.6       |
| FTC-25DB       | 62.5      | /         | 61        | 6.6       |




Cable Clamps

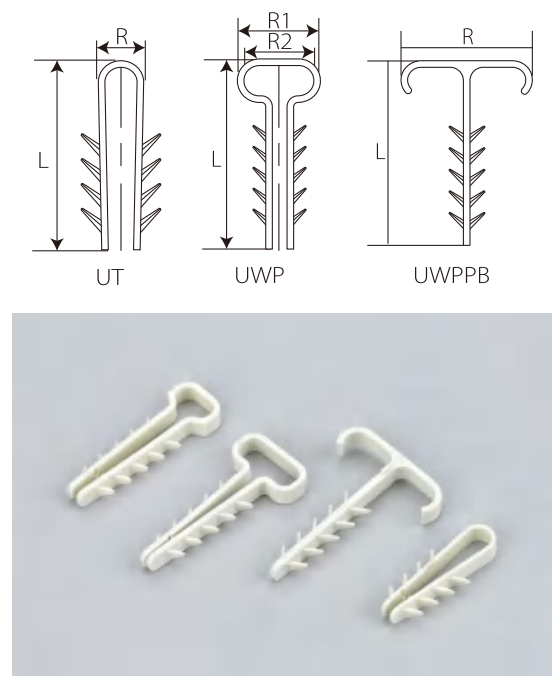

U型线类  
U-type Cable Clamps

| 编号<br>ITEM.NO. | 管径范围<br>(mm) | L<br>(mm) | R/R1<br>(mm) | R2<br>(mm) |
|----------------|--------------|-----------|--------------|------------|
| UT3-6          | 3-6          | 32        | 8            | -          |
| UT5-10         | 5-10         | 44.9      | 11.8         | -          |
| UT11-18        | 11-18        | 54        | 15.8         | -          |
| UT19-25        | 19-25        | 63.5      | 23           | -          |
| UWP5-8         | 5-8          | 44.4      | 10.5         | -          |
| UWP5-10        | 5-10         | 44.4      | 12.4         | 7.7        |
| UWP6-12        | 6-12         | 44.2      | 14.3         | 9.6        |
| UWP6-14        | 6-14         | 44.4      | 16.4         | 11.5       |
| UWPPB6-12      | 6-12         | 42.5      | 30           | 13.4       |

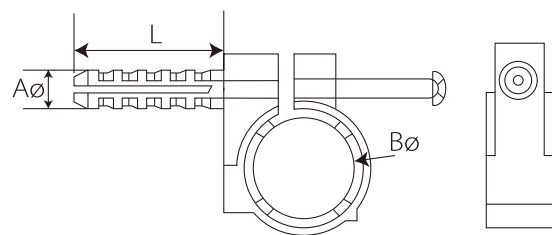

P型膨胀管夹  
P Type Clips


- 材质: PPR。
- 用途: 用于固定适合外径的管材, 如 PPR管、PVC管, PE管等。
- Material: PPR.
- Usage: Used to fix pipes suitable for outerdiameter, such as PPR pipes,PVC pipes,PE pipes, etc.



| 编号<br>ITEM.NO. | 尺寸 Size |       |       | 螺钉尺寸<br>Nail Size |
|----------------|---------|-------|-------|-------------------|
|                | A(mm)   | B(mm) | L(mm) |                   |
| AM16           | 6       | 16    | 25.5  | M4-45             |
| AM20           | 8       | 20    | 30    | M4-50             |
| AM24           | 10      | 24    | 40.5  | M6-60             |
| AM32           | 10      | 32    | 40.5  | M6-70             |


Cable Clamps

自粘式分位固定座  
Cable Clamp

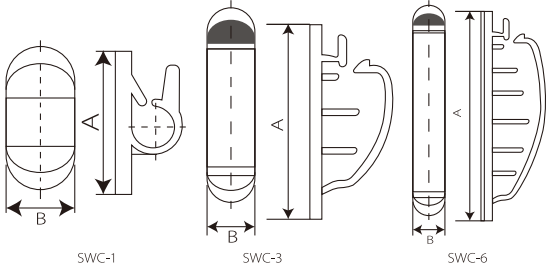

| 编号<br>ITEM.NO. | A(mm) | B(mm) | L(mm) |
|----------------|-------|-------|-------|
| SWC-1          | 22.5  | 12.5  | 1     |
| SWC-3          | 54    | 14.2  | 3     |
| SWC-6          | 87    | 14.2  | 6     |

配线固定座  
Cable Clamp


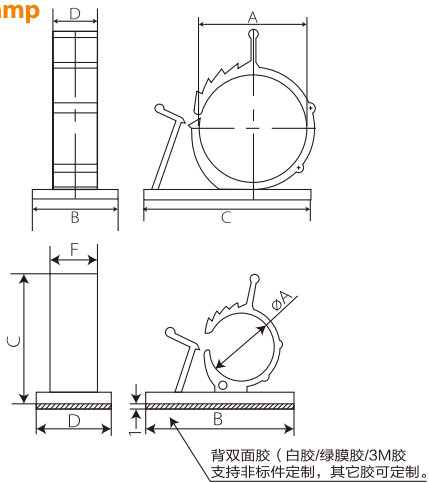


| 编号<br>ITEM.NO. | A φ (mm)  | B(mm) | C(mm) | D(mm) | E(mm) | F(mm) |
|----------------|-----------|-------|-------|-------|-------|-------|
| SZ-0810        | 7.9-10.3  | 25.4  | 22.2  | 19.1  | 1.6   | 10.2  |
| SZ-1013        | 10.0-12.8 | 31.8  | 27.8  | 19.1  | 1.6   | 10.2  |
| SZ-1316        | 12.6-15.4 | 36.4  | 31.8  | 18.5  | 3.0   | 12.0  |
| SZ-1720        | 16.5-20.1 | 41.5  | 45.5  | 25    |       |       |
| SZ-2225        | 22.2-25.0 | 41    | 44.5  | 21.5  | 3.0   | 11.5  |




Cable Clamps



电缆牌  
Cable Tag

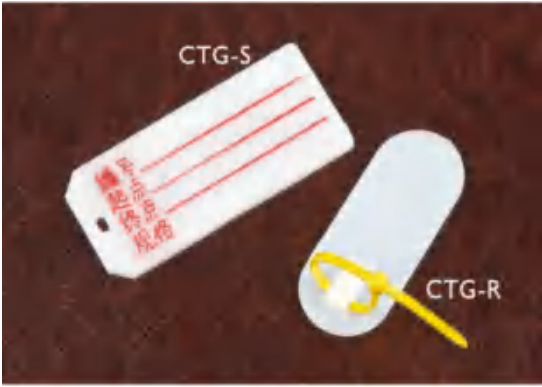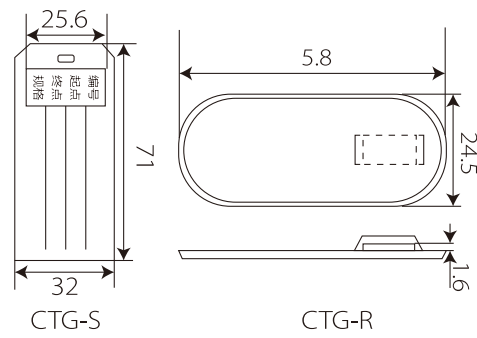

保护盖  
Security Cover

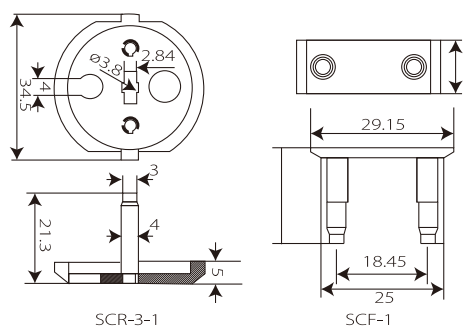


马鞍型线夹  
Sq Wire Holder

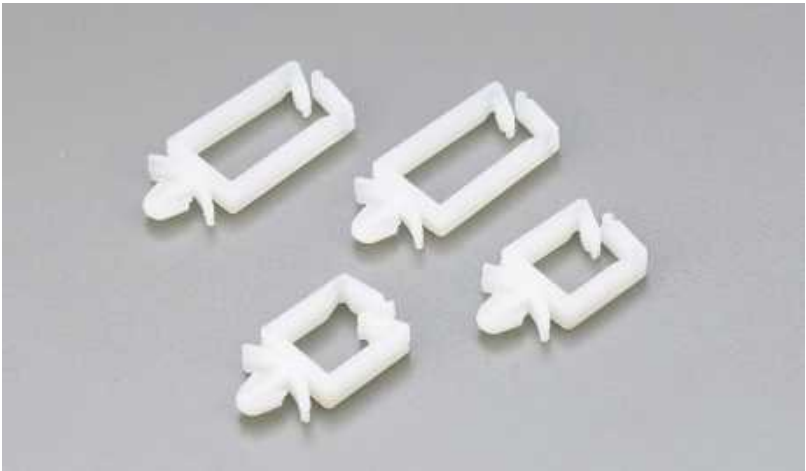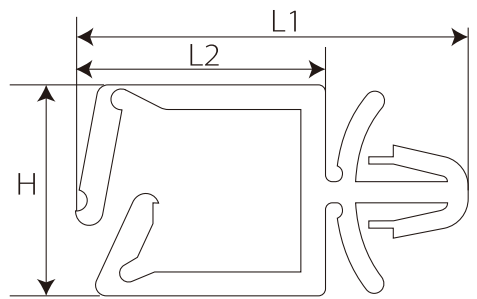

| 编号<br>ITEM.NO. | L1<br>(mm) | L2<br>(mm) | H<br>(mm) | 孔径(Φ)<br>Hole Dia. |
|----------------|------------|------------|-----------|--------------------|
| SQ-1           | 28         | 17.5       | 15.5      | 6.4                |
| SQ-2           | 36         | 26         | 15.5      | 6.4                |

Cable Clamps

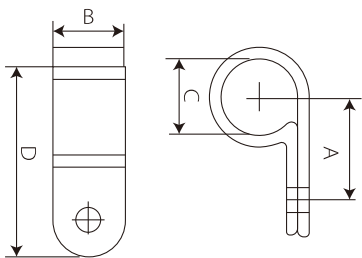

R型固定夹



材质：UL认可之尼龙66，防火等级94V-2。  
▪ 使用方法：将电缆置于固定扣内，再以螺丝固定。

R-type Cable Clamps

▪ Material: Nylon 66 94v-2 agreed by UL.  
▪ Usage: put cable in, fix by screw.

| 编号<br>ITEM.NO. | A(mm) | B(mm) | C(mm) |       | D(mm) |
|----------------|-------|-------|-------|-------|-------|
|                |       |       | mm    | Inch  |       |
| SZS-1/8R       | 9.5   | 9.6   | 3.2   | 1/8"  | 19.8  |
| SZS-3/16R      | 9.6   | 9.6   | 4.8   | 3/16" | 19.8  |
| SZS-1/4R       | 12    | 10    | 6.35  | 1/4"  | 22    |
| SZS-5/16R      | 12    | 10    | 7.9   | 5/16" | 22    |
| SZS-3/8R       | 12.5  | 12    | 9.5   | 3/8"  | 24    |
| SZS-1/2R       | 15.2  | 12    | 12.7  | 1/2"  | 31    |
| SZS-5/8R       | 18.2  | 12    | 15.8  | 5/8"  | 34.3  |
| SZS-3/4R       | 18.2  | 12    | 19.4  | 3/4"  | 35    |
| SZS-1R         | 22    | 12    | 25.4  | 1"    | 43    |



扭式束线扣  
Twist Lock

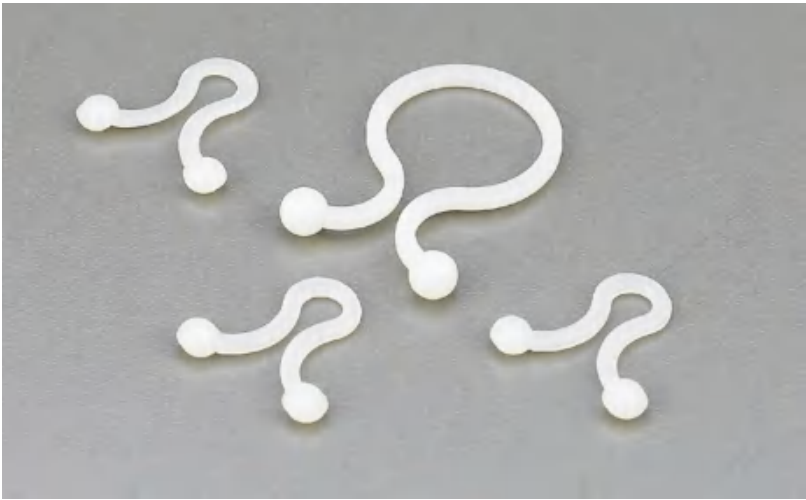

| 编号<br>ITEM.NO. | A(mm) | B(mm) |
|----------------|-------|-------|
| TL-5           | 20    | 5     |
| TL-8           | 26    | 8.3   |
| TL-11          | 30    | 11    |

| 编号<br>ITEM.NO. | A(mm) | B(mm) |
|----------------|-------|-------|
| TL-13          | 30    | 13.3  |
| TL-18          | 40    | 17.9  |
| TL-23          | 43    | 22.7  |

## Tie Mounts

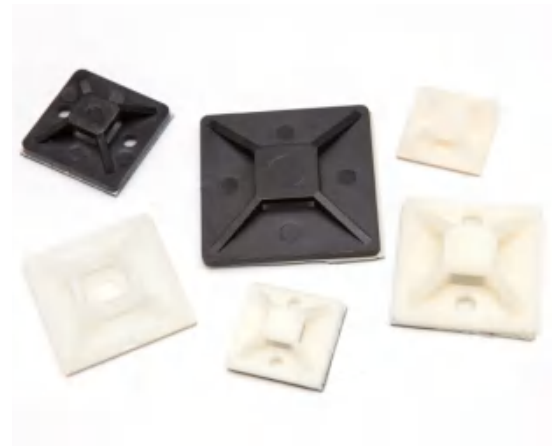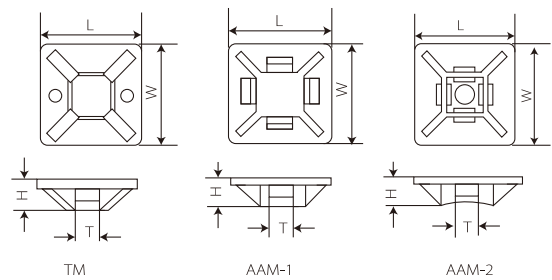


### 自粘式定位片

- 材质：采用UL认可之尼龙66料制成，防火等级94V-2。背附进口双面海绵胶，绝缘性能良好、耐久性、不易老化。
- 使用方法：将定位片海绵胶撕开，贴于机板固定，再用扎带捆扎电线。
- 用途：省时、简便，供面板不可以钻孔时使用。

#### Self-adhesive tie mounts

- Material: Nylon 66, 94V-2, certificated by UL, the back attached sponge glue imported.
- Usage: Peel the sponge glue and stick on the wall then, bundle the wire with cable ties.
- Application: for bundling wires and other things save time and convenient. used for the wall which can't be made a hole in.

| 编号<br>ITEM.NO. | 长 x 宽<br>LxW (mm) | 高(H)<br>(mm) | T<br>(mm) | 螺丝孔<br>SCREW HOLE<br>(mm) |
|----------------|-------------------|--------------|-----------|---------------------------|
| TM-12          | 12.5 x 12.5       | 4.2          | 3.2       | /                         |
| TM-20          | 20 x 20           | 5            | 4.5       | 3                         |
| TM-25          | 25 x 25           | 7.5          | 6.2       | 3.5                       |
| TM-30          | 30 x 30           | 8.7          | 6.4       | 4.5                       |
| TM-40          | 40 x 40           | 6.4          | 10.8      | /                         |
| AAM-1          | 21 x 21           | 4.5          | 4.5       | /                         |
| AAM-2          | 28 x 28           | 6.4          | 5.5       | 6                         |

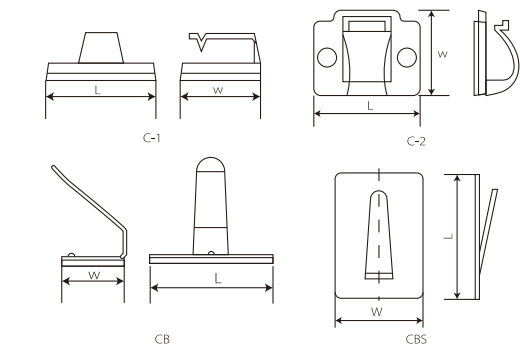

### 自粘式定位线夹

#### Self-adhesive Tie Mounts



- Material: Nylon 66,(C-1;C-2).certificated by UL, high grade steel or stainless steel; sponge double side sticker.
- Usage: remove the sticker protect paper, stick the clip on the wall, then put the wire through the clip.
- Character: convenient for use, it is especial suit for the no-holes of wall.

| 编号<br>ITEM.NO. | 高(H)<br>(mm) | 高(H)<br>(mm)    | 长 x 宽<br>LxW (mm) |
|----------------|--------------|-----------------|-------------------|
| C-1            | 17 x 12      | PA66            | 3M                |
| C-2            | 20 x 14      |                 |                   |
| CB-3           | 20 x 10      | Steel           |                   |
| CB-4           | 25 x 15      |                 |                   |
| CB-5           | 30 x 20      |                 |                   |
| CBS-1          | 20 x 14      | Stainless Steel |                   |
| CBS-2          | 30 x 20      |                 |                   |
| CBS-3          | 38 x 25      |                 |                   |
| CBS-4          | 44 x 32      |                 |                   |
| CBS-5          | 53 x38       |                 |                   |

## Cable Clamps

### 可调式固定座

#### Adjustable Cable Clamp

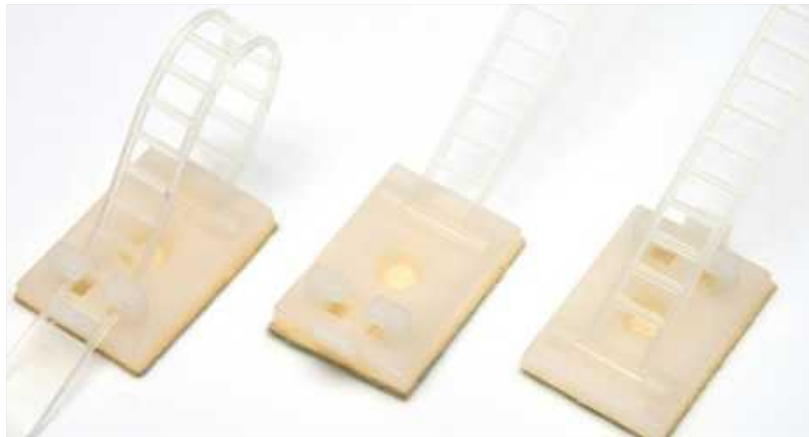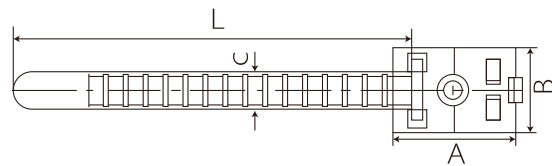

| 编号<br>ITEM.NO. | A(mm) | B(mm) | C(mm) | L(mm) |
|----------------|-------|-------|-------|-------|
| SZS-13*94      | 30.1  | 20.8  | 12.3  | 94.21 |
| SZS-8*90       | 25.3  | 17.7  | 8     | 89.55 |
| SZS-8*65       | 25.3  | 17.7  | 8     | 65.6  |

| 编号<br>ITEM.NO. | A(mm) | B(mm) | C(mm) | L(mm) |
|----------------|-------|-------|-------|-------|
| SZS-8*70       | 25.5  | 18    | 8     | 70    |
| SZS-8*85       | 25.5  | 18    | 8     | 85    |



### 实用型保护带( 附夹子)

- 材质：采用PE料制成。
- 用途：作为保护电线不受磨损及绝缘用，并可改进电线弯曲的美观。


#### Spiral Cable Zip Wrap

- Material: made from PE.
- Application: a protection wear for electric wires, and make them insulation and look nice.

| 编号<br>ITEM.NO. | A(mm) | B(mm)                           |
|----------------|-------|---------------------------------|
| SZS-08A        | 8     | 1.5M<br>2M<br>2.5M<br>3M<br>10M |
| SZS-10A        | 10    |                                 |
| SZS-15A        | 15    |                                 |
| SZS-20A        | 20    |                                 |
| SZS-25A        | 25    |                                 |
| SZS-30A        | 30    |                                 |
| SZS-35A        | 35    |                                 |
| SZS-40A        | 40    |                                 |



Spiral Wrapping Bands

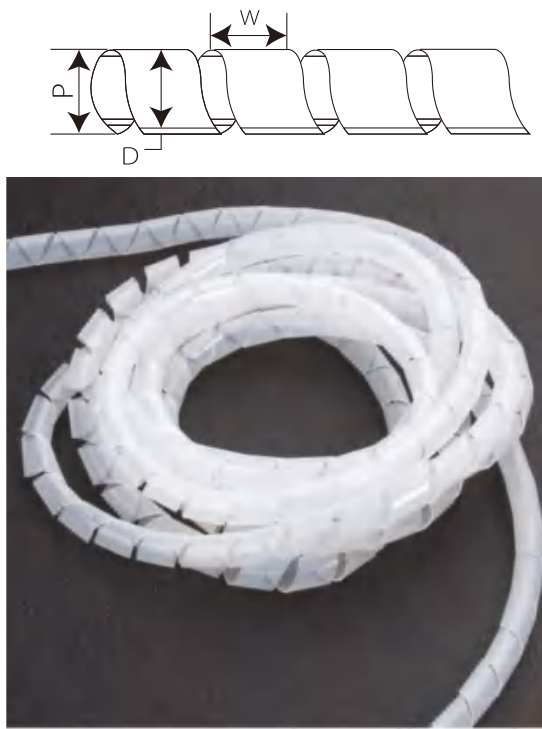


卷式结束保护带(缠绕管)

- 材质：采用PE料制成。
- 使用方法:先用保护带固定起点一端，然后按顺时针方向环绕束紧，即可将电线束为一体。
- 用途：作为保护电线不受磨损及绝缘用，并可改进电线弯曲的美观。

Spiral Wrapping Bands

- Material: made from PE .
- Usage: fix one end with safety belt first, then circle the wires clockwise to make them tighten.
- Application: a protection wear for electric wires, and make them insulation and look nice.

| 编号<br>ITEM.NO. | 内径(D)<br>(mm) | 外径(D)<br>(mm) | 螺距(W)<br>(mm) | 捆扎范围<br>(mm)<br>Wrapping Range | 包装<br>Packing |
|----------------|---------------|---------------|---------------|--------------------------------|---------------|
| SWB-03         | 1.5           | 3             | 4             | 1.5-10                         | 10M/ROLL      |
| SWB-06         | 4             | 6             | 7             | 4-50                           |               |
| SWB-08         | 6             | 8             | 10.8          | 6-60                           |               |
| SWB-10         | 7.5           | 10            | 11.4          | 7.5-60                         |               |
| SWB-12         | 9             | 12            | 13.9          | 9-65                           |               |
| SWB-15         | 12            | 15            | 15            | 12-75                          |               |
| SWB-19         | 15            | 19            | 18.2          | 15-100                         |               |
| SWB-24         | 20            | 24            | 19.6          | 20-130                         |               |
| SWB-30         | 26            | 30            | 43            | 26-150                         |               |

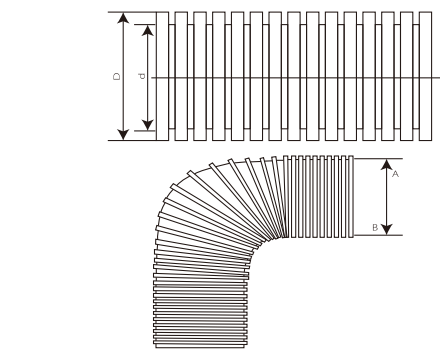

波纹管

- 材质：尼龙(PA6)聚烯(PE),聚丙烯(PP)阻燃等级HB,参照UL94色，其它颜色可询问。
- 环境温度：PA-40℃--+150℃,PE-50℃--+100℃,PP-40℃--+130℃。
- 供货颜色：黑色和灰。

Corrugated Pipe

- Material: polyamide(PA6),polyethylene(PE),polypropylene(PP) HB according to UL94.
- Usage: Ambient temperature : PA-40℃+150℃,PE-50℃+100℃,PP-40℃+130℃.
- Colour: Black and grey.

| 编号<br>ITEM.NO. | 内径×外径<br>intXext.(mm) | Dimensions mm±10% |        | 每卷米数 米/卷<br>Lengths in rings m/roll |
|----------------|-----------------------|-------------------|--------|-------------------------------------|
|                |                       | 静态 Stat           | 动态 Dyn |                                     |
| SZS-10         | 6.5×10.0              | 14                | 35     | 200                                 |
| SZS-11.6       | 8.00×11.6             | 17                | 40     | 200                                 |
| SZS-13         | 9.50×13.0             | 20                | 45     | 200                                 |
| SZS-15.8       | 12.0×15.8             | 27                | 55     | 100                                 |
| SZS-18.5       | 14.3×18.5             | 35                | 65     | 100                                 |
| SZS-21.2       | 17.0×21.2             | 40                | 75     | 100                                 |
| SZS-25.5       | 21.0×25.5             | 43                | 85.5   | 100                                 |
| SZS-28.5       | 23.0×28.5             | 47                | 100    | 100                                 |
| SZS-34.5       | 29.0×34.5             | 58                | 120    | 50                                  |
| SZS-42.5       | 36.0×42.5             | 69                | 150    | 25                                  |
| SZS-54.5       | 48.0×54.5             | 83                | 190    | 25                                  |



Cable Markers




扁型号码管

- 材质：采用优质PVC制成,能防止油性及其他物质侵蚀。
- 特点：适用于线径3.5MM到7.0MM之圆线或扁线用。

Flat Cable Markers

- Material: made from PVC, oil and erosion control .
- Feature: used for circle of flat wire size from 3.5mm-7.0mm.

| 编号<br>ITEM.NO. | 适用电线 Approx Wire |         | 号码<br>Markers   | 包 装<br>Packing |
|----------------|------------------|---------|-----------------|----------------|
|                | SQ(mm² )         | mm      |                 |                |
| EC-J           | 2~8              | 0.5~7.0 | 0~9 A~Z + - / \ | 50PCS/ROLL     |
| 特殊规格欢迎订做       |                  |         |                 |                |



圆型号码管

- 材质：采用优质PVC制成，能防止油性及其他物质侵蚀，耐温至85℃。
- 构造：号码管内部成凹型，具有弹性。内径能随着电线大小而伸缩。

Cable Markers

- Material: made from PVC, oil and erosion control, heat resisting up to 85℃ .
- Struction: the inside is hollow, but elastic, The diameter can change with the needed wire.

| 编号<br>ITEM.NO. | 适用电线 Approx Wire |          | 号码<br>Markers         | 包 装<br>Packing |
|----------------|------------------|----------|-----------------------|----------------|
|                | SQ(mm² )         | mm       |                       |                |
| EC-0           | 0.75~1.5         | 2.0~3.2  | 0~9<br>A~Z<br>+ - / \ | 1000PCS/ROLL   |
| EC-1           | 0.75~3.5         | 3.0~4.2  |                       | 1000PCS/ROLL   |
| EC-2           | 3.5~8.0          | 3.6~7.4  |                       | 500PCS/ROLL    |
| EC-3           | 5.2~10.0         | 5.2~10.0 |                       | 250PCS/ROLL    |
| EC-4           | 8~22             | 6.2~10.0 |                       | 250PCS/ROLL    |



圆型号码管

Cable Markers

| 编号<br>ITEM.NO. | 适用电线 Approx Wire |          | 号码<br>Markers         | 包 装<br>Packing |
|----------------|------------------|----------|-----------------------|----------------|
|                | SQ(mm² )         | mm       |                       |                |
| MEC-0          | 0.75~1.5         | 2.0~3.2  | 0~9<br>A~Z<br>+ - / \ | 450PCS/ROLL    |
| MEC-1          | 0.75~3.5         | 3.0~4.2  |                       | 400PCS/ROLL    |
| MEC-2          | 3.5~8.0          | 3.6~7.4  |                       | 300PCS/ROLL    |
| MEC-3          | 5.2~10.0         | 5.2~10.0 |                       | 250PCS/ROLL    |

号码带


Cable Markers Strips

| 编号<br>ITEM.NO. | 长(L)<br>(mm) | 宽(W)<br>(mm) | 包 装<br>Packing |
|----------------|--------------|--------------|----------------|
| MS-65          | 65           | 10           | 100            |
| MS-90          | 90           | 10           | 100            |
| MS-130         | 130          | 10           | 100            |





## Vinyl Wire End Caps



### 绝缘套管

- 材质：采用高级软质PVC制成。
- 用途：适用于各种配电盘，机械中复杂配线之分色处理，使线路能一目了然。软质弹性使能适合于各种不同形状的端子，使用时著脱容易。
- 特点：电机电子用高级绝缘套管、色泽清晰、光亮、弹性佳、绝缘性良好。

#### Vinyl Wire End Caps

- Material: Made from PVC .
- Usage: devide the colorful cable in machine, used to various terminals as soft feature, easy to take off.
- Character: clearly color, shine, soft, insulated.
- Color: red white blue yellow ,black green, brown available upon special request.

| 编号<br>ITEM.NO. | 规格<br>SQ (mm²) | 尺寸 Dimension |        | 包装<br>Packing |
|----------------|----------------|--------------|--------|---------------|
|                |                | D1(mm)       | D2(mm) |               |
| V-1.25         | 1.25           | 3.3          | 3.1    | 100PCS        |
| V-2            | 2              | 4.5          | 3.7    |               |
| V-3.5          | 3.5            | 5.7          | 4.1    |               |
| V-5.5          | 5.5            | 5.7          | 5.2    |               |
| V-8            | 8              | 7.2          | 6.2    |               |
| V-14           | 14             | 10           | 8      |               |
| V-22           | 22             | 12           | 9.5    |               |
| V-38           | 38             | 14           | 11.8   |               |
| V-60           | 60             | 16.8         | 13.5   |               |
| V-80           | 80             | 19           | 16     |               |
| V-100          | 100            | 22           | 18     | 50PCS         |
| V-125          | 125            | 24           | 20     |               |
| V-150          | 150            | 24.4         | 22     |               |
| V-200          | 200            | 32           | 24     |               |
| V-250          | 250            | 38           | 26.5   | 25PCS         |
| V-325          | 325            | 38           | 29     |               |
| V-400          | 400            | 44           | 37     |               |
| V-500          | 500            | 45           | 40.4   |               |
| V-630          | 630            | 52           | 45     |               |

## Heat Shrinkable Tubings

### 热收缩套管

- 功能:
- 电线之保护与绝缘
  - 端子与电线接头之绝缘与保护
  - 分色作用
  - 防水
  - 电阻电容器之保护与绝缘



#### Heat Shrinkable Tubings

- Function:
- wire coat and insulation.
  - make the joint of terminal block and wire insulated.
  - divide the colors.
  - water-proof.
  - protection and insulation of insistors and electrical capacitors.
  - Standard color : black white, red, blue, yellow, green, brown, grey, orange and purple.

| 编号<br>ITEM.NO. | 收缩前 As Supplied |                      | 收缩后 After Shrinkang |                      | 包装<br>Packing |
|----------------|-----------------|----------------------|---------------------|----------------------|---------------|
|                | 内径I.D<br>(mm)   | 厚度 Thickness<br>(mm) | 内径I.D<br>(mm)       | 厚度 Thickness<br>(mm) |               |
| DRS-1          | 1               | 0.2±0.05             | 0.5                 | 0.4±0.05             | 400m/roll     |
| DRS-1.5        | 1.5             | 0.2±0.05             | 0.75                | 0.4±0.05             | 300m/roll     |
| DRS-2          | 2               | 0.25±0.05            | 1                   | 0.45±0.1             | 200m/roll     |
| DRS-2.5        | 2.5             | 0.25±0.05            | 1.25                | 0.45±0.1             |               |
| DRS-3          | 3               | 0.25±0.05            | 1.5                 | 0.45±0.1             |               |
| DRS-3.5        | 3.5             | 0.25±0.05            | 1.75                | 0.45±0.1             | 100m/roll     |
| DRS-4          | 4               | 0.25±0.05            | 2                   | 0.45±0.1             |               |
| DRS-5          | 5               | 0.35±0.05            | 2.5                 | 0.55±0.1             |               |
| DRS-6          | 6               | 0.35±0.05            | 3                   | 0.55±0.1             |               |
| DRS-7          | 7               | 0.35±0.05            | 3.5                 | 0.55±0.1             |               |
| DRS-8          | 8               | 0.35±0.05            | 4                   | 0.55±0.1             |               |
| DRS-9          | 9               | 0.35±0.05            | 4.5                 | 0.55±0.1             |               |
| DRS-10         | 10              | 0.35±0.05            | 5                   | 0.60±0.1             |               |
| DRS-11         | 11              | 0.35±0.05            | 5.5                 | 0.60±0.1             |               |
| DRS-12         | 12              | 0.35±0.1             | 6                   | 0.70±0.1             | 50m/roll      |
| DRS-13         | 13              | 0.35±0.1             | 6.5                 | 0.70±0.1             |               |
| DRS-14         | 14              | 0.35±0.1             | 7                   | 0.70±0.1             |               |
| DRS-15         | 15              | 0.35±0.1             | 7.5                 | 0.70±0.1             |               |
| DRS-16         | 16              | 0.35±0.1             | 8                   | 0.70±0.1             |               |
| DRS-18         | 18              | 0.4±0.1              | 9                   | 0.80±0.1             |               |
| DRS-20         | 20              | 0.5±0.1              | 10                  | 0.90±0.1             | 25m/roll      |
| DRS-22         | 22              | 0.5±0.1              | 11                  | 0.90±0.1             |               |
| DRS-25         | 25              | 0.5±0.1              | 12.5                | 0.90±0.1             |               |
| DRS-28         | 28              | 0.5±0.1              | 14                  | 0.90±0.1             |               |
| DRS-30         | 30              | 0.5±0.1              | 15                  | 1.00±0.2             |               |
| DRS-35         | 35              | 0.5±0.1              | 17.5                | 1.00±0.2             |               |
| DRS-40         | 40              | 0.5±0.1              | 20                  | 1.00±0.2             |               |
| DRS-50         | 50              | 0.5±0.1              | 25                  | 1.00±0.2             |               |
| DRS-60         | 60              | 0.6±0.1              | 30                  | 1.20±0.2             |               |
| DRS-70         | 70              | 0.6±0.1              | 35                  | 1.20±0.2             |               |
| DRS-80         | 80              | 0.6±0.1              | 40                  | 1.20±0.2             |               |
| DRS-90         | 90              | 0.6±0.1              | 45                  | 1.30±0.2             |               |
| DRS-100        | 100             | 0.7±0.1              | 50                  | 1.30±0.2             |               |
| DRS-120        | 120             | 0.7±0.1              | 60                  | 1.30±0.2             |               |
| DRS-150        | 150             | 0.8±0.1              | 75                  | 1.60±0.2             |               |



Heat Shrinkable Tubings



热收缩套管组合

| 编号<br>ITEM.NO. | 规格<br>Size(mm) | 颜色<br>Color | 数量<br>Q'ty | 长度<br>L(mm) |
|----------------|----------------|-------------|------------|-------------|
| SZS-100C       | DRS-1.5        | 黑 Black     | 30         | 100mm       |
|                | DRS-2.5        | 黄 Yellow    | 30         |             |
|                | DRS-4.0        | 红 Red       | 20         |             |
|                | DRS-6.0        | 绿 Green     | 10         |             |
|                | DRS-10.0       | 兰 Blue      | 6          |             |
|                | DRS-13.0       | 白 White     | 4          |             |
| SZS-100B       | DRS-1.5        | 黑 Black     | 30         |             |
|                | DRS-2.5        | 黑 Black     | 30         |             |
|                | DRS-4.0        | 黑 Black     | 20         |             |
|                | DRS-6.0        | 黑 Black     | 10         |             |
|                | DRS-10.0       | 黑 Black     | 6          |             |
|                | DRS-13.0       | 黑 Black     | 4          |             |



黄腊管 (聚氯乙烯玻纤管)

英文名为"PVC SILICONE FIBERGLASS SLEEVING",本产品是以玻璃纤维丝编织而成,并涂以聚氯乙烯树脂经浴话而成的电器绝缘漆管。本管具有良好的柔软性、弹性、绝缘耐化学性、适用于电机、电器、仪表、无线电等装置的布线绝缘和机械保护。

主要参数如下


- 产品规格:  $\Phi$ 0.5~ $\Phi$ 60mm
- 耐温指数: 105℃
- 产品颜色: 白底绿条、白底红条、白底蓝条(黑色、白色等可定制)
- 产品材质: 玻璃纤维, 聚氯乙烯树脂。
- 击穿电压: 本系列产品分为4个等级, 室温下耐压分别特级□3500v、一级□2500v、二级□1500v\三级□800v。
- 产品包装: 条状袋装(整卷可定制)。



绝缘胶带

Pvc Insulating Tape

|                   |                 |                       |                 |
|-------------------|-----------------|-----------------------|-----------------|
| 0.13mm×15mm×6yds  | 0.15mm×15mm×10m | 0.13mm×19mm×8yds      | 0.15mm×25mm×10m |
| 0.13mm×15mm×8yds  | 0.15mm×15mm×15m | 0.13mm×19mm×10yds     | 0.15mm×25mm×15m |
| 0.13mm×15mm×10yds | 0.15mm×15mm×20m | 0.13mm×19mm×20yds     | 0.15mm×25mm×20m |
| 0.13mm×15mm×20yds | 0.15mm×15mm×25m | 0.13mm×19mm×5m        | 0.15mm×25mm×25m |
| 0.13mm×19mm×5m    | 0.15mm×19mm×5m  | 0.13mm×19mm×10m       | 0.19mm×19mm×5m  |
| 0.13mm×15mm×10m   | 0.15mm×19mm×10m | 0.13mm×19mm×15m       | 0.19mm×19mm×10m |
| 0.13mm×15mm×15m   | 0.15mm×19mm×15m | 0.13mm×19mm×20m       | 0.19mm×19mm×15m |
| 0.13mm×15mm×20m   | 0.15mm×19mm×20m | 0.13mm×19mm×25m       | 0.19mm×19mm×20m |
| 0.13mm×15mm×25m   | 0.15mm×19mm×25m | 0.15mm×15mm×5m        | 0.19mm×19mm×25m |
| 0.13mm×19mm×6yds  | 0.15mm×25mm×5m  | SUPPORT CUSTOMIZATION |                 |

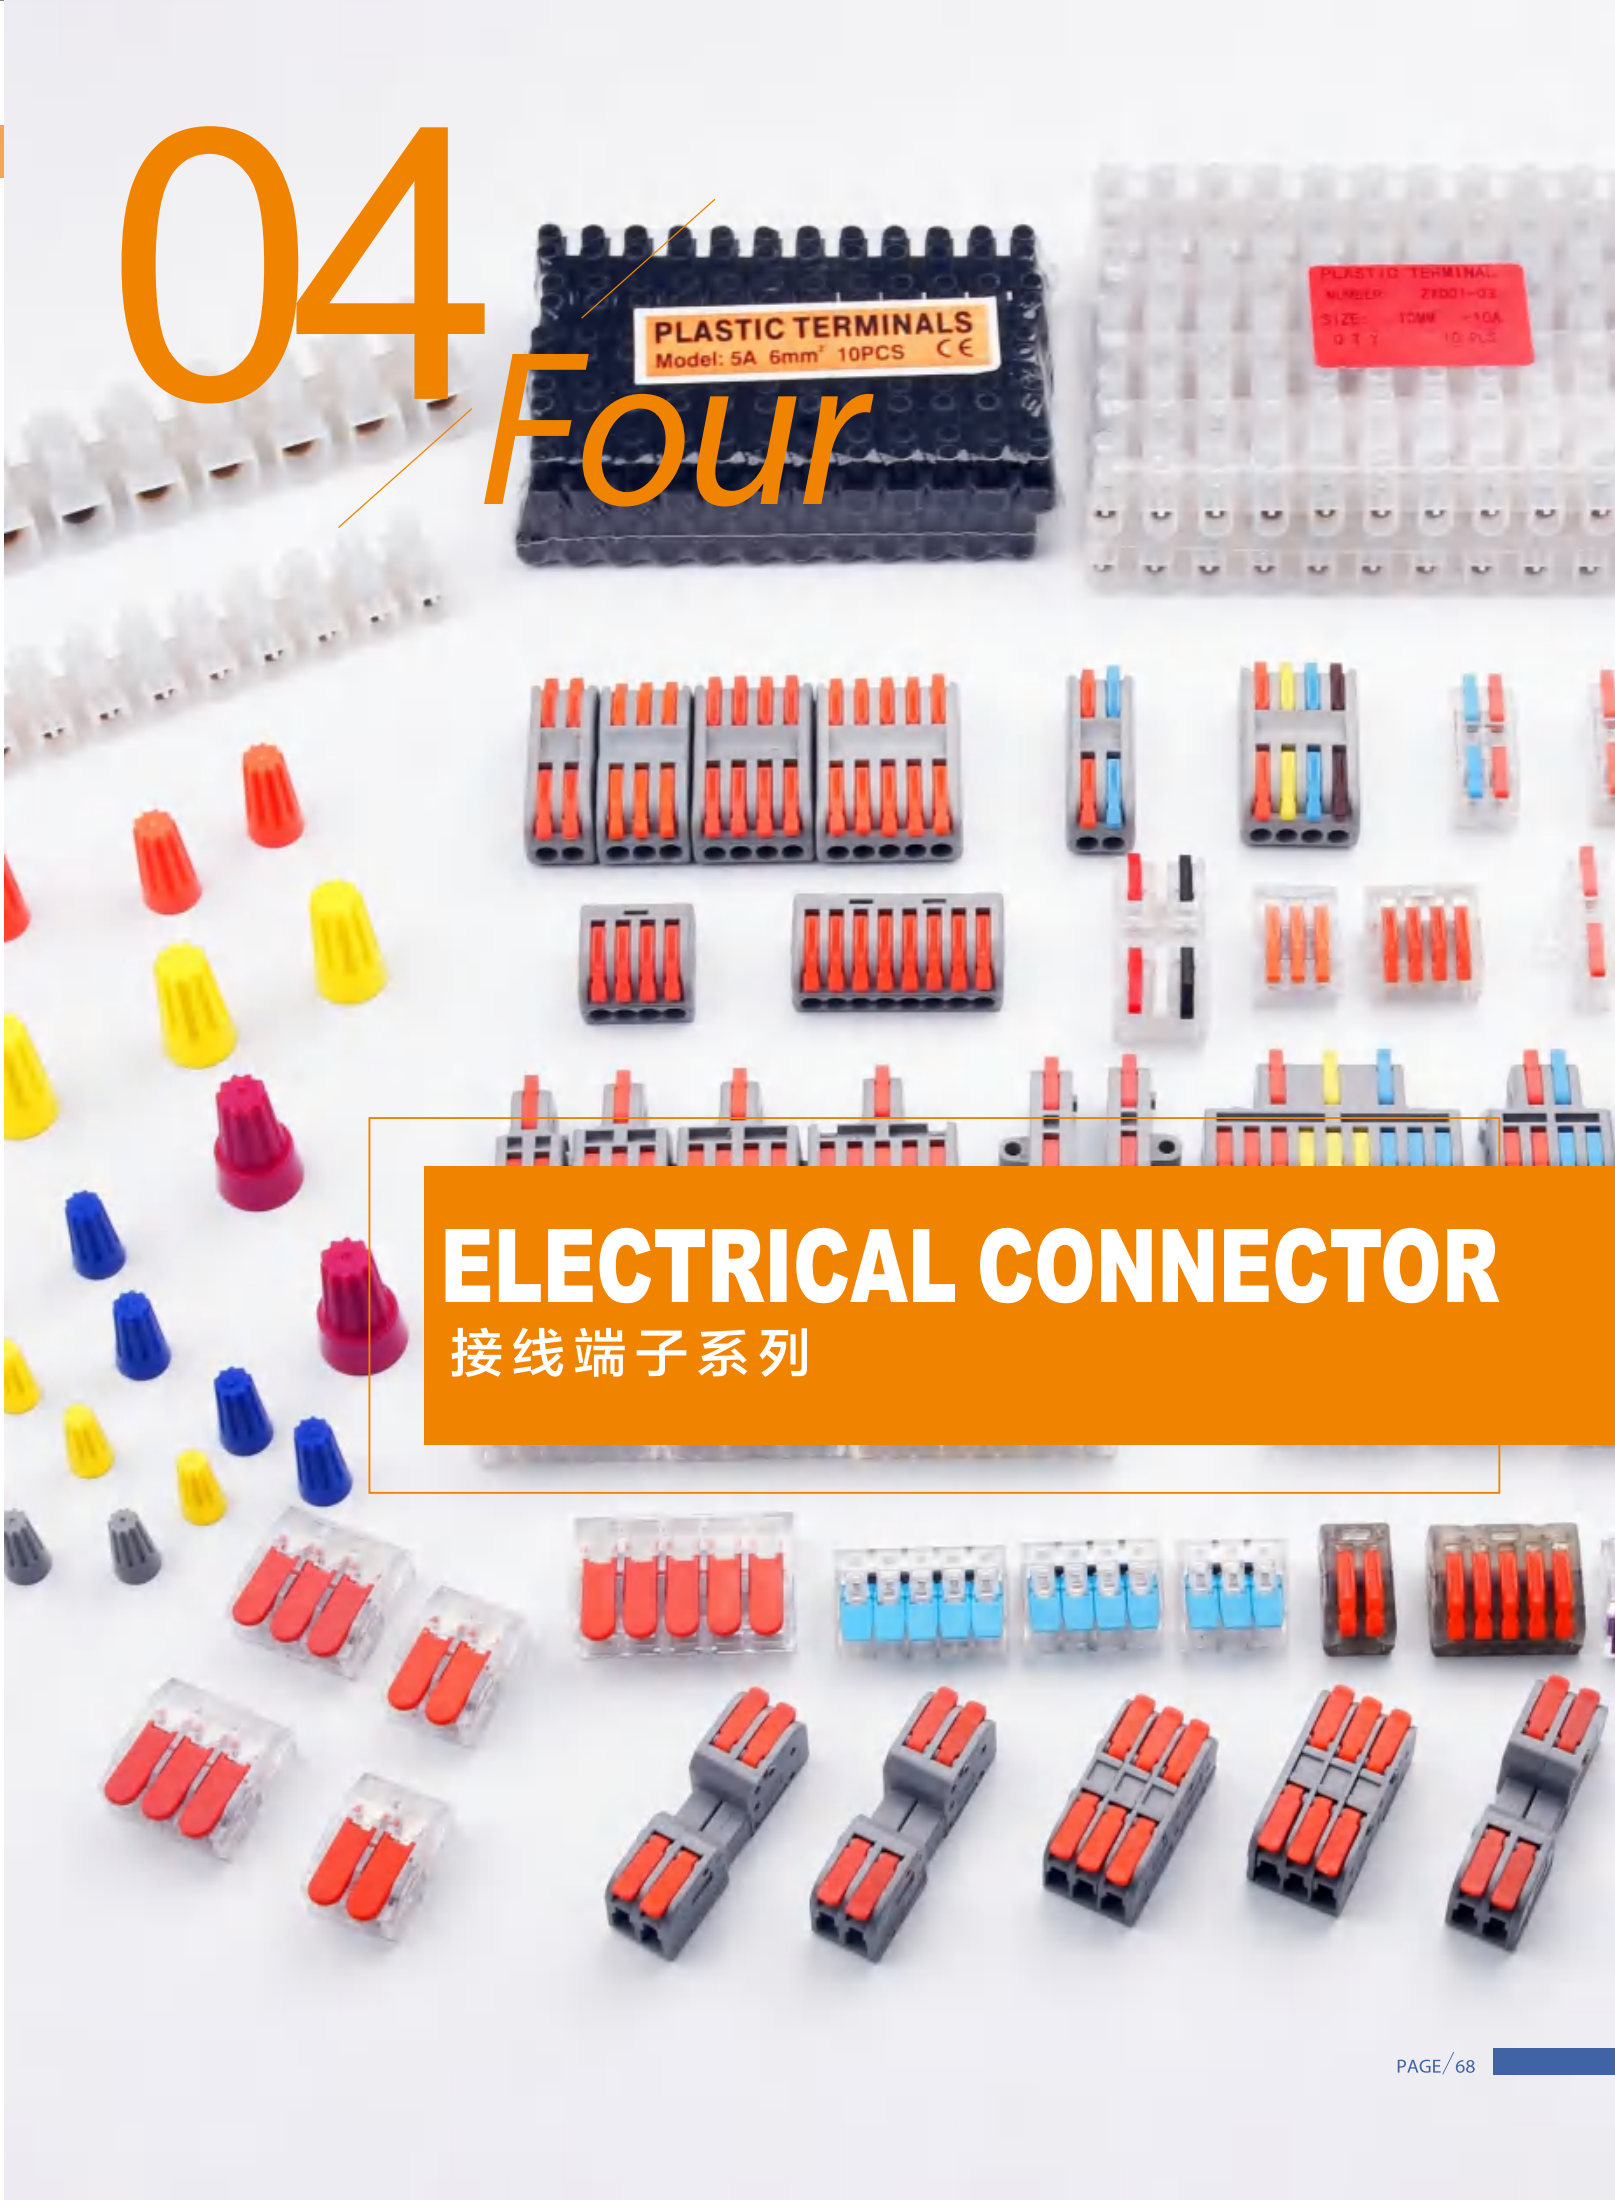

ELECTRICAL CONNECTOR  
接线端子系列





## Terminal Blocks



### 接线端子


接线端子U、H型、V (F)型。

- 材质：采用PA、PE或PP料制成。

#### Terminal Blocks

TERMINAL BLOCKS: H version,U(W),V(F)type.

- Material: made from PA, PE or PP.

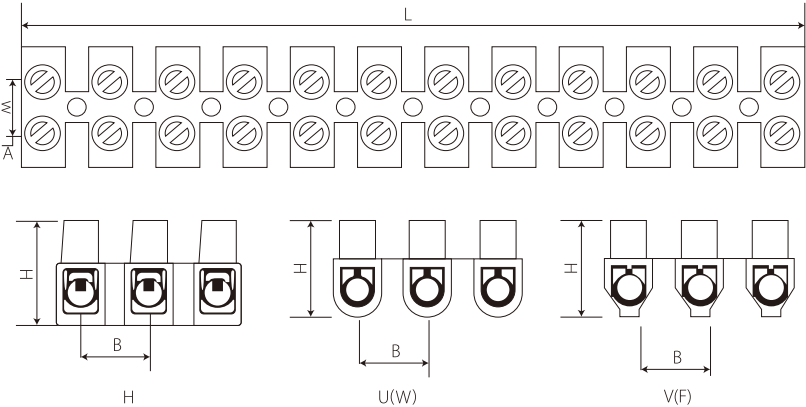

#### U Type


| 编号<br>ITEM.NO. | L<br>(mm) | W<br>(mm) | H<br>(mm) | A<br>(mm) | B<br>(mm) | 孔径Φ<br>(mm) | mm2 | VOLT | AMP  | 包装<br>Packing |
|----------------|-----------|-----------|-----------|-----------|-----------|-------------|-----|------|------|---------------|
| TBS-3A         | 90.3      | 15.5      | 11.5      | 6         | 7.7       | Ø3.0        | 4   | 400V | 3A   | 10PCS         |
| TBS-6A         | 110.5     | 15.5      | 12.4      | 6.5       | 9.5       | Ø3.2        | 6   | 400V | 6A   |               |
| TBS-10A        | 116.7     | 20        | 14.9      | 8         | 10        | Ø4.0        | 10  | 400V | 10A  |               |
| TBS-16A        | 136.8     | 21.5      | 16.7      | 10        | 11.7      | Ø4.2        | 12  | 400V | 16A  |               |
| TBS-20A        | 153.5     | 24.5      | 17.4      | 11.5      | 13.2      | Ø4.3        | 14  | 400V | 20A  |               |
| TBS-30A        | 164.6     | 25        | 18.8      | 12        | 14.1      | Ø5.5        | 16  | 400V | 30A  |               |
| TBS-60A        | 187.6     | 29        | 23.5      | 12        | 16        | Ø6.8        | 25  | 400V | 60A  |               |
| TBS-80A        | 205       | 33        | 27        | 15        | 17        | Ø7.0        | 35  | 400V | 80A  |               |
| TBS-100A       | 250       | 46        | 31        | 22        | 21        | Ø9.0        | 40  | 400V | 100A |               |

#### H Type

| 编号<br>ITEM.NO. | L<br>(mm) | W<br>(mm) | H<br>(mm) | A<br>(mm) | B<br>(mm) | 孔径Φ<br>(mm) | mm2 | VOLT | AMP  | 包装<br>Packing |
|----------------|-----------|-----------|-----------|-----------|-----------|-------------|-----|------|------|---------------|
| TBS-3A         | 90.3      | 15.5      | 10.8      | 6         | 8         | Ø3.0        | 4   | 400V | 3A   | 10PCS         |
| TBS-6A         | 110.7     | 15.5      | 12.5      | 6.5       | 9.5       | Ø3.2        | 6   | 400V | 6A   |               |
| TBS-10A        | 117.5     | 20        | 15        | 8.4       | 10.5      | Ø4.0        | 10  | 400V | 10A  |               |
| TBS-16A        | 137.5     | 22        | 17        | 10.3      | 12        | Ø4.2        | 12  | 400V | 16A  |               |
| TBS-20A        | 155       | 25        | 19.2      | 11.5      | 13.5      | Ø4.3        | 14  | 400V | 20A  |               |
| TBS-30A        | 166.7     | 25.5      | 20        | 12        | 14.5      | Ø5.5        | 16  | 400V | 30A  |               |
| TBS-60A        | 188       | 29        | 23.5      | 13.5      | 16.5      | Ø6.8        | 25  | 400V | 60A  |               |
| TBS-80A        | 205       | 33        | 27        | 15        | 17        | Ø7.0        | 35  | 400V | 80A  |               |
| TBS-100A       | 250       | 46        | 31        | 22        | 21        | Ø9.0        | 40  | 400V | 100A |               |



## Wire Connectors

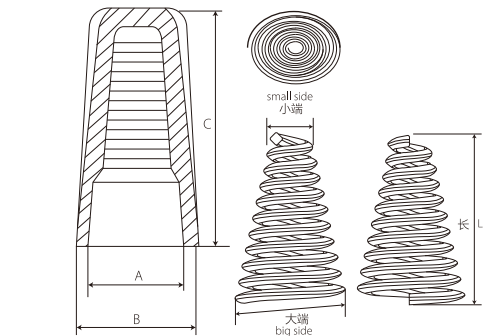


### 螺旋式压线帽

- 材质：采用UL认可尼龙66料制成，内部备有弹簧。
- 使用方法：将电线尾部外皮剥去，将所要接的电线同时插入扭紧即可。

#### Screw On Wire Connectors

- Material: UL Nylon 66 , with spring inside.
- Usage: peel wire coat, insert the wire in, then tighten.

| 编号<br>ITEM.NO. | A<br>(mm) | B<br>(mm) | C<br>(mm) | 适用电线<br>Suitable Wires<br>(mm) | Inner Spring Size |          |       |
|----------------|-----------|-----------|-----------|--------------------------------|-------------------|----------|-------|
|                |           |           |           |                                | Small Side        | Big Side | L(mm) |
| SZS-P1         | 6.2       | 8.5       | 15.2      | 0.51*0.51                      | 2                 | 4.4      | 7     |
| SZS-P2         | 6.6       | 9.8       | 17.5      | 0.51*0.51                      | 2.5               | 8.9      | 8.3   |
| SZS-P3         | 9.5       | 12.4      | 21.5      | 0.51*0.51                      | 2.7               | 5.2      | 8.8   |
| SZS-P4         | 10.6      | 14.1      | 24.5      | 0.59*0.59                      | 2.8               | 6        | 11    |
| SZS-P6         | 12.7      | 16.1      | 26.4      | 0.72*0.72                      | 3.5               | 7.5      | 11.5  |

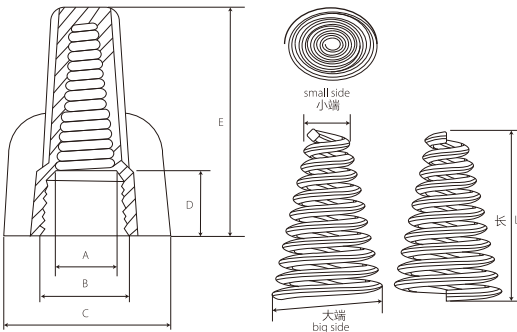

### 双翼螺旋式压线帽

- 材质：采用UL认可尼龙66料制成，内部备有弹簧。
- 使用方法：将电线尾部外皮剥去，将所要接的电线同时插入扭紧即可。
- 特点：外型设有扭转翼，使操作省力轻便，易于将电线固定。

#### Double Wings Screw On Wire Connectors

- Material: UL Nylon 66 , with spring inside.
- Usage: peel wire coat, insert the wire in, then tighten.

| 编号<br>ITEM.NO. | A<br>(mm) | B<br>(mm) | C<br>(mm) | D<br>(mm) | 适用电线<br>Suitable Wires<br>(mm) | Inner Spring Size |          |       |
|----------------|-----------|-----------|-----------|-----------|--------------------------------|-------------------|----------|-------|
|                |           |           |           |           |                                | Small Side        | Big Side | L(mm) |
| SZS-P11        | 6.6       | 10        | 18.3      | 9.3       | 0.72*0.72                      | 3.1               | 6.7      | 11.4  |
| SZS-P12        | 8.3       | 11.2      | 19.3      | 9.3       | 0.72*0.72                      | 3.1               | 8.1      | 13.7  |
| SZS-P13        | 9.4       | 12.9      | 23        | 11        | 0.92*0.92                      | 4.1               | 9.4      | 16.8  |
| SZS-P15        | 10.8      | 14.4      | 25.8      | 11        | 1.2*1.2                        | 6.4               | 10.8     | 19    |
| SZS-P17        | 11.6      | 17.2      | 31.8      | 12.9      | 1.2*1.2                        | 6.6               | 12.8     | 22    |




Wire Joints



全塑料螺旋式压线帽  
All Plastics Connectors

| 编号<br>ITEM.NO. | 高(H)<br>(mm) | 宽(W)<br>(mm) | 内径(D)<br>(mm) | 适用电线<br>SUITABLE WIRES              | 颜色<br>COLOR |
|----------------|--------------|--------------|---------------|-------------------------------------|-------------|
| SZS-N71        | 15           | 8.5          | 6.5           | MIN#20 x1+#22 x1<br>MAX#16x2        | 灰Grey       |
| SZS-N72        | 18           | 10           | 7.5           | MIN#20 x3<br>MAX#16x3               | 兰Blue       |
| SZS-N73        | 20           | 11.5         | 9.5           | MIN#20 x3<br>MAX#16 x3+#18x1        | 橘红Orange    |
| SZS-N74        | 23.5         | 13.5         | 10.8          | MIN#14X1+#18x1<br>MAX#14 x 4+#18 x1 | 黄Yellow     |
| SZS-N75        | 23.5         | 15.5         | 12.7          | MIN#14 x2<br>MAX#10 x 2+#12 x 2     | 红Red        |

Wire Joints

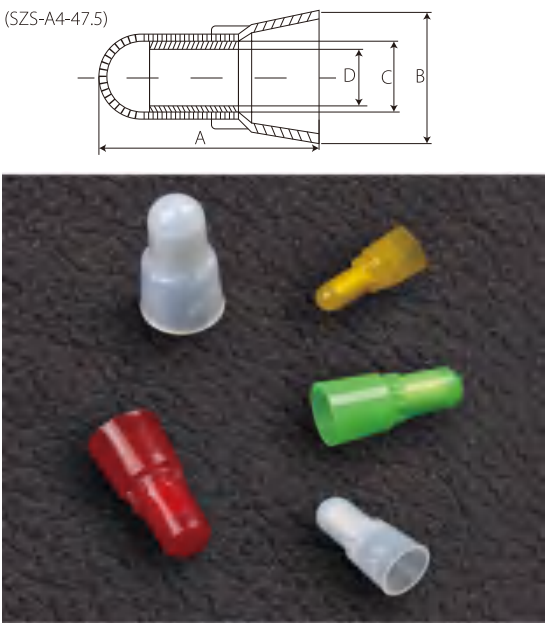

定位型压线帽  
Safety-type Wire Joints

- 用法如同安全型压线帽
- 加定位点，接线更牢固


| 编号<br>ITEM.NO. | 高(H)<br>(mm) | 宽(W)  |       | 铜管<br>内径(D)<br>(mm) | 适用电线<br>范围mm² | SUITABLE WIRES<br>AMG |
|----------------|--------------|-------|-------|---------------------|---------------|-----------------------|
|                |              | B(mm) | C(mm) |                     |               |                       |
| SZS-A4         | 20           | 9     | 2.8   | 4                   | 1.25          | 22-16                 |
| SZS-A5         | 21           | 10.2  | 3.6   | 5                   | 2             | 16-14                 |
| SZS-A5.5       | 25           | 11.5  | 3.9   | 5.5                 | 5.5           | 12-10                 |
| SZS-A6         | 26.5         | 12.8  | 4.5   | 6.1                 | 8             | 8                     |
| SZS-A7.5       | 28           | 14.4  | 5.5   | 7.5                 | 10            | 8-6                   |

安全型压线帽

- 外壳材质：UL 认可之尼龙，防火等级94V-2。
- 使用方法：将电线尾部外皮剥去再插入套管内，用压线钳压紧即可。
- 特点：外壳为尼龙注塑成型、内部铜管特长，增加电线压接范围使其更易于导电，并更能夹住电线，即使强烈振动亦不脱落。


Safety-type Wire Joints

- Shell material: Nylon 66, 94V-2, certificated agree, by UL.
- Usage: Peel the coat of wire, then insert to tube, use pincers to fix them.
- Feature: Nylon shell , long copper tube , easy to conduct electricity and hold wire tightly.

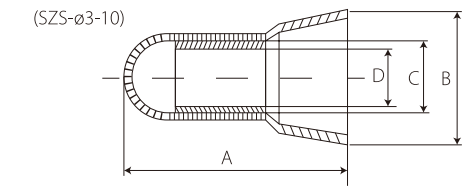

| 编号<br>ITEM.NO. | 高(H)<br>(mm) | 宽(W)  |       | 铜管<br>内径(D)<br>(mm) | 适用电线<br>范围mm² | SUITABLE WIRES<br>AMG |
|----------------|--------------|-------|-------|---------------------|---------------|-----------------------|
|                |              | B(mm) | C(mm) |                     |               |                       |
| SZS-Ø3         | 18           | 9     | 3.6   | 2.8                 | 1.25          | 22-16                 |
| SZS-Ø4         | 21           | 9.5   | 3.9   | 3                   | 2             | 16-14                 |
| SZS-Ø5         | 22.5         | 10.5  | 4.8   | 4                   | 5.5           | 12-10                 |
| SZS-Ø6         | 24           | 12    | 5.6   | 4.8                 | 8             | 8                     |
| SZS-Ø7         | 25.5         | 13    | 6.5   | 5.5                 | 10            | 8-6                   |
| SZS-Ø8         | 25.5         | 14    | 7.5   | 6                   | 13            | 6                     |
| SZS-Ø10        | 29.5         | 15.5  | 9.3   | 7.8                 | 16            | 4                     |

快速连接器  
Quick Wire Connectors

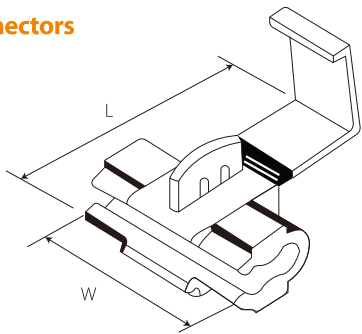

| 编号<br>ITEM.NO. | DIMENSION |       | A.W.G mm²                  | COLOR    |
|----------------|-----------|-------|----------------------------|----------|
|                | W(mm)     | L(mm) |                            |          |
| KW-3           | 20        | 27    | 22-18 A.W.G<br>0.5-1.0mm2  | 红 Red    |
| KW-4           | 20        | 27    | 18-14 A.W.G<br>1.0-2.5mm2  | 蓝 Blue   |
| KW-5           | 20.5      | 34.5  | 12-10 A.W.G<br>4-6mm2      | 黄 Yellow |
| KW-6           |           |       | 22-10 A.W.G<br>0.5-0.75mm2 | 红 Red    |

| 编号<br>ITEM.NO. | 导线截面<br>A.W.G mm²       | COLOR    |
|----------------|-------------------------|----------|
| T1             | 22-18 A.W.G 0.5-1.0mm2  | 红 Red    |
| T2             | 20-16 A.W.G 0.75-1.5mm2 | 蓝 Blue   |
| T5             | 18-14 A.W.G 1.0-2.5mm2  | 黄 Yellow |



Quick Wire Connectors

快速连接器

- PC工程塑料外壳，UL 94V-0阻燃等级。
- 不锈钢弹片、高导电性铜与钢板接端子。
- 剥线后直接插入线槽即可。
- 适合单股和多股导线，可重复插入比先前拆掉最大规格的导线。
- 适用于灯饰配线和建筑水电工程电气接线盒内配线。

Wire Connectors

- Poly carbonate, UL 94V-0 flame-retardant shell.
- Stainless steel elastic plate, high conductivity copper plate to connect wires.
- Insert wires after peeling the coat.
- Suitable for solid wire and strand wire, reusable(can insert wires of bigger diameter than the ones striped out).
- Suitable for fixing wires for lighting and electrical construction.

插入式快速连接器 Push-in Wire Connectors

10系列/10 Series   ▪ 电流Current: 24A   ▪ 电压Voltage: 400V   ▪ 接线范围Wire Range: 硬线/Solid wire, 0.75–2.5mm²

|                                                                                                                                       |                                                                                                                                      |                                                                                                                                         |                                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>PCT-102</b><br>尺寸Size(LxWxH): 9.3x19.4x13.4mm | <br><b>PCT-104</b><br>尺寸Size(LxWxH): 13x19.4x13.4mm | <br><b>PCT-106</b><br>尺寸Size(LxWxH): 18.6x19.4x13.4mm | <br><b>PCT-108</b><br>尺寸Size(LxWxH): 24.1x19.4x13.4mm |
|---------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|

20系列/20 Series   ▪ 电流Current: 24A   ▪ 电压Voltage: 450V   ▪ 接线范围Wire Range: 硬线/Solid wire, 0.5–2.5mm²

|                                                                                                                                           |                                                                                                                                             |                                                                                                                                           |                                                                                                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>PCT-202</b><br>尺寸Size(LxWxH): 9.8x16.35x5.4mm   | <br><b>PCT-203</b><br>尺寸Size(LxWxH): 13.8x16.35x5.4mm    | <br><b>PCT-204</b><br>尺寸Size(LxWxH): 17.8x16.35x5.4mm | <br><b>PCT-205</b><br>尺寸Size(LxWxH): 21.8x16.35x5.4mm |
| <br><b>PCT-206</b><br>尺寸Size(LxWxH): 13.8x16.35x10.3mm | <br><b>PCT-208</b><br>尺寸Size(LxWxH): 17.8x16.35x10.3mm |                                                                                                                                           |                                                                                                                                            |

25系列/25 Series   ▪ 电流Current: 24A   ▪ 电压Voltage: 450V   ▪ 接线范围Wire Range: 硬线/Solid wire, 0.75–2.5mm²

|                                                                                                                                         |                                                                                                                                         |                                                                                                                                          |                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>PCT-252</b><br>尺寸Size(LxWxH): 10.5x19.4x9.6mm | <br><b>PCT-253</b><br>尺寸Size(LxWxH): 13.7x19.4x9.6mm | <br><b>PCT-254</b><br>尺寸Size(LxWxH): 17.4x19.4x9.6mm | <br><b>PCT-255</b><br>尺寸Size(LxWxH): 21x19.4x9.6mm |
|-----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|

Quick Wire Connectors

60系列/60 Series   ▪ 电流Current: 24A   ▪ 电压Voltage: 400V   ▪ 接线范围Wire Range: 硬线/Solid wire, 0.75–4.0mm²


|                                                                                                                                         |                                                                                                                                        |                                                                                                                                          |                                                                                                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>PCT-602</b><br>尺寸Size(LxWxH): 9.3x19.4x13.4mm | <br><b>PCT-604</b><br>尺寸Size(LxWxH): 13x19.4x13.4mm | <br><b>PCT-606</b><br>尺寸Size(LxWxH): 18.6x19.4x13.4mm | <br><b>PCT-608</b><br>尺寸Size(LxWxH): 21x19.4x13.4mm |
|-----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|

笼式弹簧接线端子 Cage Spring Terminal Block

21系列常规款–尼龙材质/21 Series/regular type-Nylon material  
▪ 电流Current: 32A   ▪ 电压Voltage: 250V   ▪ 接线范围Wire Range: 硬线/Solid wire:0.08–4mm² 软线/Strand wire:0.08–2.5mm²

|                                                                                                                                        |                                                                                                                                        |                                                                                                                                        |                                                                                                                                        |                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>PCT-212</b><br>尺寸Size(LxWxH): 12.5x21x14.4mm | <br><b>PCT-213</b><br>尺寸Size(LxWxH): 17.1x21x14.4mm | <br><b>PCT-214</b><br>尺寸Size(LxWxH): 21.7x21x14.4mm | <br><b>PCT-215</b><br>尺寸Size(LxWxH): 26.3x21x14.4mm | <br><b>PCT-218</b><br>尺寸Size(LxWxH): 40.4x21x14.4mm |
|----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|

21系列透明款–PC材质/21 Series/Transparent type-PC material  
▪ 电流Current: 32A   ▪ 电压Voltage: 250V   ▪ 接线范围Wire Range: 硬线/Solid wire:0.08–4mm² 软线/Strand wire:0.08–2.5mm²

|                                                                                                                                          |                                                                                                                                          |                                                                                                                                          |                                                                                                                                          |                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>PCT-212</b><br>尺寸Size(LxWxH): 12.5x21x14.4mm | <br><b>PCT-213</b><br>尺寸Size(LxWxH): 17.1x21x14.4mm | <br><b>PCT-214</b><br>尺寸Size(LxWxH): 21.7x21x14.4mm | <br><b>PCT-215</b><br>尺寸Size(LxWxH): 26.3x21x14.4mm | <br><b>PCT-218</b><br>尺寸Size(LxWxH): 40.4x21x14.4mm |
|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|

固定支架/Mounting Clip  
可以搭配21系列的连接器固定。  
SZS-21 can match with 21 series to fix.

41系列/41 Series  
▪ 电流Current: 32A   ▪ 电压Voltage: 450V  
▪ 接线范围Wire Range: 硬线/Solid wire:0.2–4mm² 软线/Strand wire:0.14–4mm²

|                                                                                                                                                                                                 |                                                                                                                                         |                                                                                                                                           |                                                                                                                                           |                                                                                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| 固定支架<br>用于固定PCT-212/PCT-213/PCT-214/PCT-215/PCT-218<br><br><b>SZS-21</b><br>尺寸Size(LxWxH): 10x22.66x15.5mm | <br><b>PCT-412</b><br>尺寸Size(LxWxH): 13x19.4x9.6mm | <br><b>PCT-413</b><br>尺寸Size(LxWxH): 18.6x19.4x9.6mm | <br><b>PCT-414</b><br>尺寸Size(LxWxH): 24.2x19.4x9.6mm | <br><b>PCT-415</b><br>尺寸Size(LxWxH): 29.8x19.4x9.6mm |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|



Quick Wire Connectors

| 61系列/61Series · 电流Current: 40A · 电压Voltage: 450V · 接线范围Wire Range: 硬线/Solid wire:0.5-6mm² 软线/Strand wire: 0.4-4mm² |                                                                                   |                                                                                    |                                                                                     |
|--------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                   |  |  |  |
| <b>PCT-612</b>                                                                                                     | <b>PCT-613</b>                                                                    | <b>PCT-614</b>                                                                     | <b>PCT-615</b>                                                                      |
| 尺寸Size(LxWxH): 16.8x25.07x11.3mm                                                                                   | 尺寸Size(LxWxH): 23.9x25.07x11.3mm                                                  | 尺寸Size(LxWxH): 31x25.07x11.3mm                                                     | 尺寸Size(LxWxH): 38.1x25.07x11.3mm                                                    |

双边进线 BILATERAL TYPE-WIRE TO WIRE

| 橙色手柄/Orange handles · 电流Current: 32A · 电压Voltage: 250V · 接线范围Wire Range: 硬线/Solid wire:0.08-4mm² 软线/Strand wire: 0.08-2.5mm² |                                                                                   |                                                                                    |                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                             |  |  |  |
| <b>PCT-2-2</b>                                                                                                               | <b>PCT-2-3</b>                                                                    | <b>PCT-2-4</b>                                                                     | <b>PCT-2-5</b>                                                                      |
| 尺寸Size(LxWxH): 13.6x40.3x14.5mm                                                                                              | 尺寸Size(LxWxH): 18.6x40.3x14.5mm                                                   | 尺寸Size(LxWxH): 23.6x40.3x14.5mm                                                    | 尺寸Size(LxWxH): 28.6x40.3x14.5mm                                                     |

彩色手柄/Colorful handles

|                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| <b>PCT-2-2</b>                                                                      | <b>PCT-2-3</b>                                                                      | <b>PCT-2-4</b>                                                                       | <b>PCT-2-5</b>                                                                        |
| 尺寸Size(LxWxH): 13.6x40.3x14.5mm                                                     | 尺寸Size(LxWxH): 18.6x40.3x14.5mm                                                     | 尺寸Size(LxWxH): 23.6x40.3x14.5mm                                                      | 尺寸Size(LxWxH): 28.6x40.3x14.5mm                                                       |

橙色手柄透明款/Orange handles Transparent type

|                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| <b>PCT-2-2</b>                                                                      | <b>PCT-2-3</b>                                                                      | <b>PCT-2-4</b>                                                                       | <b>PCT-2-5</b>                                                                        |
| 尺寸Size(LxWxH): 13.6x40.3x14.5mm                                                     | 尺寸Size(LxWxH): 18.6x40.3x14.5mm                                                     | 尺寸Size(LxWxH): 23.6x40.3x14.5mm                                                      | 尺寸Size(LxWxH): 28.6x40.3x14.5mm                                                       |

彩色手柄透明款/Colorful handles Transparent type


|                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| <b>PCT-2-2</b>                                                                      | <b>PCT-2-3</b>                                                                      | <b>PCT-2-4</b>                                                                       | <b>PCT-2-5</b>                                                                        |
| 尺寸Size(LxWxH): 13.6x40.3x14.5mm                                                     | 尺寸Size(LxWxH): 18.6x40.3x14.5mm                                                     | 尺寸Size(LxWxH): 23.6x40.3x14.5mm                                                      | 尺寸Size(LxWxH): 28.6x40.3x14.5mm                                                       |

Quick Wire Connectors

▪ 手柄颜色，多色可选，接受定制 ▪ All handles can have more color options , or can be customized.

迷你常规款-尼龙材质/Mini regular type-Nylon material

· 电流Current: 32A · 电压Voltage: 250V · 接线范围Wire Range: 硬线/Solid wire:0.08-4mm² 软线/Strand wire:0.08-2.5mm²

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| <b>PCT-2-1M</b>                                                                     | <b>PCT-2-2M</b>                                                                     | <b>PCT-2-3M</b>                                                                     |                                                                                     |
| 尺寸Size(LxWxH): 8x31x13.5mm                                                          | 尺寸Size(LxWxH): 13x31.5x13.5mm                                                       | 尺寸Size(LxWxH): 18x31.5x13.5mm                                                       |                                                                                     |

迷你透明款-PC材质/Mini Transparent type-PC material

|                                                                                     |                                                                                     |                                                                                     |                                                                                                              |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
|  |  |  | <p>工艺升级，迷你新款可以适应狭小的接线空间。<br/>Technology upgrade, mini size can be suitable for more narrow wiring space.</p> |
| <b>PCT-2-1M</b>                                                                     | <b>PCT-2-2M</b>                                                                     | <b>PCT-2-3M</b>                                                                     |                                                                                                              |
| 尺寸Size(LxWxH): 8x31x13.5mm                                                          | 尺寸Size(LxWxH): 13x31.5x13.5mm                                                       | 尺寸Size(LxWxH): 18x31.5x13.5mm                                                       |                                                                                                              |

固定支架 & 拼接支架 Mounting Clip & Splicing bracket

|                                                                                       |                                                                                       |                                                                                       |                                                                                                     |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
|  |  |  | <p>可搭配<br/>Can match with below :<br/>PCT-2-2/PCT-2-2M<br/>PCT-2-3/PCT-2-3M<br/>PCT-2-4 PCT-2-5</p> |
| <b>SZS-22</b>   固定支架 Mounting Clip                                                    | <b>SZS-23</b>   拼接支架 Splicing bracket                                                 | <b>SZS-24</b>   带孔拼接支架 Splicing bracket with hole                                     |                                                                                                     |
| 尺寸Size(LxWxH): 18.5x25x17.5mm                                                         | 尺寸Size(LxWxH): 14.9x25x17.5mm                                                         | 尺寸Size(LxWxH): 22.4x25x17.5mm                                                         |                                                                                                     |

4MM²分线器-尼龙材质: 4mm2 Deconcentrator-Nylon material



· 电流Current: 32A · 电压Voltage: 250V · 接线范围Wire Range: 硬线/Solid wire:0.08-4mm² 软线/Strand wire:0.08-2.5mm²

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| <b>SZS-42</b>                                                                         | <b>SZS-62</b>                                                                         | <b>SZS-63</b>                                                                         | <b>SZS-93</b>                                                                         |
| 尺寸Size(LxWxH): 24.55x31.5x13.5mm                                                      | 尺寸Size(LxWxH): 33x31.5x13.5mm                                                         | 尺寸Size(LxWxH): 33x31.5x13.5mm                                                         | 尺寸Size(LxWxH): 48x31.5x13.5mm                                                         |

4MM²分线器-透明PC材质: 4mm2 Deconcentrator-Transparent PC material

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| <b>SZS-42</b>                                                                         | <b>SZS-62</b>                                                                         | <b>SZS-63</b>                                                                         | <b>SZS-93</b>                                                                         |
| 尺寸Size(LxWxH): 24.55x31.5x13.5mm                                                      | 尺寸Size(LxWxH): 33x31.5x13.5mm                                                         | 尺寸Size(LxWxH): 33x31.5x13.5mm                                                         | 尺寸Size(LxWxH): 48x31.5x13.5mm                                                         |

Quick Wire Connectors

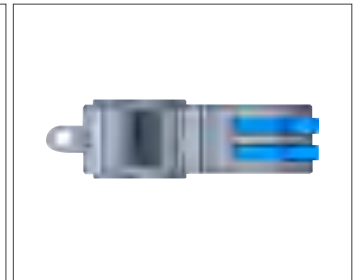
|                                                                                    |                                                                                    |                                                                                     |                                                                                      |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|   |   |   |   |
| SZS-T22                                                                            | SZS-T24                                                                            | SZS-T11                                                                             | SZS-T12                                                                              |
|   |   |   |   |
| SZS-12                                                                             | SZS-13                                                                             | SZS-14                                                                              | SZS-15                                                                               |
|  |  |  |  |
| SZS-12T                                                                            | SZS-13T                                                                            | SZS-14T                                                                             | SZS-15T                                                                              |

无痛手柄系列 Painless handle Quick Wire Connectors

▪ 电流Current: 32A ▪ 电压Voltage: 250V ▪ 接线范围Wire Range: 硬线/Solid wire:0.2-4mm² 软线/Strand wire:0.2-4mm²

|                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| SZS-2604-1                                                                          | SZS-2604-2                                                                          | SZS-2604-3                                                                           | SZS-2604-4                                                                            |
|  |  |  |  |
| SZS-2604-5                                                                          | SZS-2604-6                                                                          | SZS-2604-8                                                                           | SZS-2604-10                                                                           |

Quick Wire Connectors 1进多出,不能零火接同时接在一个端子里面

|                                                                                      |                                                                                      |                                                                                      |                                                                                      |                                                                                      |
|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|   |   |   |   |   |
| 2 in 2 out<br>SZS-2604-1X1                                                           | 3 in 3 out<br>SZS-2604-1X3                                                           | 2 in 2 out<br>SZS-2604-2X2                                                           | 3 in 3 out<br>SZS-2604-2X3                                                           | 2 in 4 out<br>SZS-2604-3X2                                                           |
|   |   |   |   |   |
| 3 in 6 out<br>SZS-2604-3X3                                                           | 2 in 6 out<br>SZS-2604-4X2                                                           | 3 in 9 out<br>SZS-2604-4X3                                                           | 2 in 8 out<br>SZS-2604-5X2                                                           | 3 in 12 out<br>SZS-2604-5X3                                                          |
| SZS-2604D 对插款 1-N位可选 (1-N pins for choices)                                          |                                                                                      |                                                                                      |                                                                                      |                                                                                      |
|  |  |  |  |  |
| 1 in 1 out<br>SZS-2604D-1                                                            | 2 in 2 out<br>SZS-2604D-2                                                            | 2 in 3 out<br>SZS-2604D-3                                                            | 4 in 4 out<br>SZS-2604D-4                                                            | 5 in 5 out<br>SZS-2604D-5                                                            |

彩色手柄/Colorful Handles

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| 2 in 2 out<br>SZS-2604D-2                                                             | 3 in 3 out<br>SZS-2604D-3                                                             | 4 in 4 out<br>SZS-2604D-4                                                             | 5 in 5 out<br>SZS-2604D-5                                                             |

SZS-2604P 带针款 2-N位可选 (2-N pins for choices)

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| SZS-2604P-2                                                                           | SZS-2604P-3                                                                           | SZS-2604P-4                                                                           | SZS-2604P-5                                                                           |

SZS-2608 代替老款 PCT-2-2/2-3等 (1-N pins for choices) replace PCT-2-2/2-3...Support lasering letters

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| SZS-2608-1                                                                            | SZS-2608-2                                                                            | SZS-2608-3                                                                            | SZS-2608-4                                                                            |



Quick Wire Connectors

|                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| SZS-2608-5                                                                        | SZS-2608-6P                                                                       | SZS-2608-8P                                                                       | SZS-2608-10P                                                                       | SZS-2608-12P                                                                        |



SZS-2608 彩色 Colorful handles

|                                                                                   |                                                                                   |                                                                                   |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| SZS-2608-2C                                                                       | SZS-2608-3C                                                                       | SZS-2608-4C                                                                       | SZS-2608-5C                                                                         |

SZS-2608 透明橙色 Transparent type orange handles

|                                                                                    |                                                                                    |                                                                                    |                                                                                     |                                                                                      |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |  |  |  |
| SZS-2608-1P                                                                        | SZS-2608-2                                                                         | SZS-2608-3                                                                         | SZS-2608-4                                                                          | SZS-2608-5                                                                           |

SZS-2608 透明彩色 Transparent type colorful handles

|                                                                                     |                                                                                     |                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| SZS-2608-2                                                                          | SZS-2608-3                                                                          | SZS-2608-4                                                                          | SZS-2608-5                                                                            |

SZS-2608B款 固定款 1-N位可选 (1-N pins for choices)

|                                                                                                      |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <br>Mounting clip |  |  |  |  |
| SZS-32固定支架                                                                                           | SZS-2608-1B                                                                         | SZS-2608-2B                                                                         | SZS-2608-3B                                                                          | SZS-2608-4B                                                                           |
|                   |  |  |  |  |
| SZS-2608-5B                                                                                          | SZS-2608-6B                                                                         | SZS-2608-8B                                                                         | SZS-2608-10B                                                                         | SZS-2608-12B                                                                          |

Quick Wire Connectors

SZS-2608C款 轨道款 1-N位可选 (1-N pins for choices)

|                                                                                                      |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <br>Track bracket |  |  |  |  |
| SZS-33轨道支架                                                                                           | SZS-2608-1C                                                                         | SZS-2608-2C                                                                         | SZS-2608-3C                                                                         | SZS-2608-4C                                                                         |
|                   |  |  |  |  |
| SZS-2608-5C                                                                                          | SZS-2608-6C                                                                         | SZS-2608-8C                                                                         | SZS-2608-10C                                                                        | SZS-2608-12C                                                                        |

SZS-2608D款 常规并联款 2-N位可选 (2-N pins for choices)


|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |  |
| 1 in 3 out                                                                          | 1 in 5 out                                                                          | 1 in 7 out                                                                          | 1 in 9 out                                                                          | 1 in 11 out                                                                         | 1 in 15 out                                                                         | 1 in 19 out                                                                         | 1 in 23 out                                                                         |
| SZS-2608-2D                                                                         | SZS-2608-3D                                                                         | SZS-2608-4D                                                                         | SZS-2608-5D                                                                         | SZS-2608-6D                                                                         | SZS-2608-8D                                                                         | SZS-2608-10D                                                                        | SZS-2608-12D                                                                        |

SZS-2608E款 轨道式并联款 2-N位可选 (2-N pins for choices)

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| 1 in 3 out                                                                            | 1 in 5 out                                                                            | 1 in 7 out                                                                            | 1 in 9 out                                                                            |
| SZS-2608-2E                                                                           | SZS-2608-3E                                                                           | SZS-2608-4E                                                                           | SZS-2608-5E                                                                           |
|  |  |  |  |
| 1 in 11 out                                                                           | 1 in 15 out                                                                           | 1 in 19 out                                                                           | 1 in 23 out                                                                           |
| SZS-2608-6E                                                                           | SZS-2608-8E                                                                           | SZS-2608-10E                                                                          | SZS-2608-12E                                                                          |


SZS-2608 常规款和并联款组合

以下仅推荐4款常用组合，支持客订报价含激光文字，支持激光文字修改  
Following just for reference, we support customization and lasering letters.

|                                                                                                                       |                                                                                                                                |                                                                                                                |                                                                                                                 |
|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| <br>2 in 6 out<br>火线1分3<br>零线1分3 | <br>3 in 9 out<br>火线1分3<br>地线1分3<br>零线1分3 | <br>火线对接<br>地线1分3<br>零线对接 | <br>火线1分3<br>地线对接<br>零线1分3 |
| SZS-2608-2DX2                                                                                                         | SZS-2608-2DX3                                                                                                                  | SZS-2608-1-2D-1                                                                                                | SZS--2608-2D-1-2D                                                                                               |




Cable Lugs

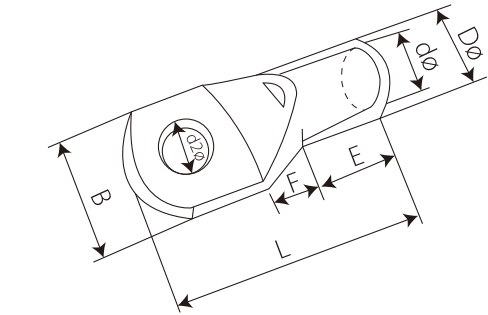

窥口铜接端头 Copper Tube Terminals/Cable lugs

| 编号<br>ITEM.NO. | 螺栓口直径<br>screw dia.<br>d2(mm) | 尺寸DIMENSION(mm) |      |      |      |     | 导线面积<br>CLNLE SQ |
|----------------|-------------------------------|-----------------|------|------|------|-----|------------------|
|                |                               | dØ              | DØ   | B    | E    | L   |                  |
| SC1.5-5        | 5.2                           | 1.8             | 3.7  | 8    | 6.5  | 16  | 1.5              |
| SC2.5-4        | 4.2                           | 2.4             | 4    | 8    | 7    | 18  | 2.5              |
| SC2.5-5        | 5.2                           |                 |      | 10   | 7    | 20  |                  |
| SC4-5          | 5.2                           | 3.1             | 4.8  | 10   | 4.8  | 20  | 4                |
| SC4-6          | 6.5                           |                 |      |      |      |     |                  |
| SC6-5          | 5.2                           | 3.8             | 5.5  | 10   | 5.5  | 23  | 6                |
| SC6-6          | 6.5                           |                 |      | 12   |      |     |                  |
| SC10-6         | 6.5                           | 4.5             | 6.2  | 12   | 6.2  | 25  | 10               |
| SC10-8         | 8.4                           |                 |      |      |      |     |                  |
| SC16-6         | 6.5                           | 5.4             | 7.1  | 12   | 7.1  | 30  | 16               |
| SC16-8         | 8.4                           |                 |      |      |      |     |                  |
| SC25-6         | 6.5                           | 6.8             | 8.8  | 13   | 8.8  | 33  | 25               |
| SC25-8         | 8.4                           |                 |      | 18   |      |     |                  |
| SC35-8         | 8.4                           | 8.2             | 10.6 | 15.3 | 14.5 | 38  | 35               |
| SC35-10        | 10.5                          |                 |      | 18   |      |     |                  |
| SC50-8         | 8.4                           | 9.5             | 12.4 | 17.8 | 17   | 45  | 50               |
| SC50-10        | 10.5                          |                 |      |      |      |     |                  |
| SC70-10        | 10.5                          | 11.2            | 14.7 | 21   | 19.5 | 50  | 70               |
| SC70-12        | 13                            |                 |      |      |      |     |                  |
| SC95-10        | 10.5                          | 13.5            | 17.4 | 25   | 23.5 | 55  | 95               |
| SC95-12        | 13                            |                 |      |      |      |     |                  |
| SC120-12       | 13                            | 15              | 19.4 | 28   | 26   | 63  | 120              |
| SC120-16       | 17                            |                 |      |      |      |     |                  |
| SC150-12       | 13                            | 16.5            | 21.2 | 30   | 29   | 70  | 150              |
| SC150-16       | 17                            |                 |      |      |      |     |                  |
| SC185-16       | 17                            | 18.5            | 23.5 | 34   | 33   | 75  | 185              |
| SC240-16       | 17                            | 21              | 26.5 | 38   | 40   | 90  | 240              |
| SC240-20       | 21                            |                 |      |      |      |     |                  |
| SC300-16       | 17                            | 23.5            | 30   | 43   | 44   | 98  | 300              |
| SC300-20       | 21                            |                 |      |      |      |     |                  |
| SC400-16       | 17                            | 28.5            | 36.5 | 50.1 | 46   | 110 | 400              |
| SC400-20       | 21                            |                 |      |      |      |     |                  |
| SC500-16       | 17                            | 30              | 39   | 56   | 50   | 120 | 500              |
| SC500-20       | 21                            |                 |      |      |      |     |                  |
| SC630-20       | 21                            | 35              | 45   | 65   | 45   | 140 | 630              |
| SC800-BL       | -                             | 39              | 50.6 | 73.5 | 50.6 | 170 | 800              |
| SC1000-BL      | -                             | 43              | 56.2 | 81   | 56.2 | 200 | 1000             |

Insulated Spade Terminals

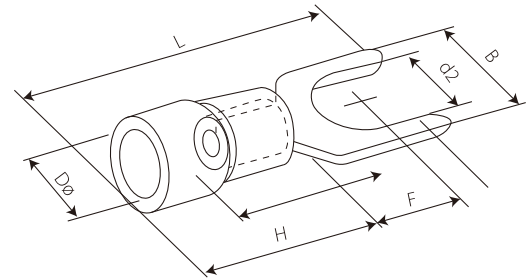

叉形预绝缘端头 Insulated Spade Terminals

导线截面: 0.5~1.5mm²(22-16) 最大电流: I<sub>max</sub>=19A

| 编号<br>ITEM.NO. | 美制<br>螺栓号 | 螺栓口<br>直径<br>d2(mm) | 尺寸DIMENSION |       |       |       |        | 颜色<br>COLOR |
|----------------|-----------|---------------------|-------------|-------|-------|-------|--------|-------------|
|                |           |                     | B(mm)       | L(mm) | F(mm) | H(mm) | DØ(mm) |             |
| SV1.25-3       | #4        | 3.2                 | 5.7         | 21.2  | 6.5   | 10    | 4.3    | 红<br>Red    |
| SVS1.25-3.5    | #6        | 3.7                 | 5.7         | 21.2  | 6.5   |       |        |             |
| SVL1.25-3.5    | #6        | 3.7                 | 6.4         | 21.2  | 6.5   |       |        |             |
| SVS1.25-4      | #8        | 4.3                 | 6.4         | 21.2  | 6.5   |       |        |             |
| SVM1.25-4      | #8        | 4.3                 | 7.2         | 21.2  | 6.5   |       |        |             |
| SVL1.25-4      | #8        | 4.3                 | 8.1         | 21.2  | 6.5   |       |        |             |
| SVS1.25-5      | #10       | 5.3                 | 8.1         | 21.2  | 6.5   |       |        |             |
| SVL1.25-5      | #10       | 5.3                 | 9.5         | 21.2  | 6.5   |       |        |             |
| SVS1.25-6      | 1/4       | 6.5                 | 9.5         | 21.2  | 6.5   |       |        |             |
| SVL1.25-6      | 1/4       | 6.5                 | 12.0        | 21.2  | 11.0  |       |        |             |

导线截面: 1.5~2.5mm²(16-14) 最大电流: I<sub>max</sub>=27A

| 编号<br>ITEM.NO. | 美制<br>螺栓号 | 螺栓口<br>直径<br>d2(mm) | 尺寸DIMENSION |       |       |       |        | 颜色<br>COLOR |
|----------------|-----------|---------------------|-------------|-------|-------|-------|--------|-------------|
|                |           |                     | B(mm)       | L(mm) | F(mm) | H(mm) | DØ(mm) |             |
| SV2-3          | #4        | 3.2                 | 5.7         | 21.2  | 6.5   | 10    | 4.9    | 兰<br>Blue   |
| SVS2-3.5       | #6        | 3.7                 | 5.7         | 21.2  | 6.5   |       |        |             |
| SVL2-3.5       | #6        | 3.7                 | 6.4         | 21.2  | 6.5   |       |        |             |
| SVS2-4         | #8        | 4.3                 | 6.4         | 21.2  | 6.5   |       |        |             |
| SVM2-4         | #8        | 4.3                 | 7.2         | 21.2  | 6.5   |       |        |             |
| SVL2-4         | #8        | 4.3                 | 8.1         | 21.2  | 6.5   |       |        |             |
| SVS2-5         | #10       | 5.3                 | 8.1         | 21.2  | 6.5   |       |        |             |
| SVL2-5         | #10       | 5.3                 | 9.5         | 21.2  | 6.5   |       |        |             |
| SVS2-6         | 1/4       | 6.5                 | 9.5         | 21.2  | 6.5   |       |        |             |
| SVL2-6         | 1/4       | 6.5                 | 12.0        | 21.2  | 11.0  |       |        |             |

导线截面: 2.5~4mm²(14-12) 最大电流: I<sub>max</sub>=37A


| 编号<br>ITEM.NO. | 美制<br>螺栓号 | 螺栓口<br>直径<br>d2(mm) | 尺寸DIMENSION |       |       |       |        | 颜色<br>COLOR |
|----------------|-----------|---------------------|-------------|-------|-------|-------|--------|-------------|
|                |           |                     | B(mm)       | L(mm) | F(mm) | H(mm) | DØ(mm) |             |
| SV3.5-4        | #8        | 4.3                 | 8.0         | 24.8  | 7.0   | 12.5  | 6.2    | 黑<br>Black  |
| SV3.5-5        | #10       | 5.3                 | 8.0         | 24.8  | 7.0   |       |        |             |
| SV3.5-6        | 1/4       | 6.5                 | 12.0        | 28.0  | 12.1  |       |        |             |

导线截面: 4~6mm²(12-10) 最大电流: I<sub>max</sub>=48A

| 编号<br>ITEM.NO. | 美制<br>螺栓号 | 螺栓口<br>直径<br>d2(mm) | 尺寸DIMENSION |       |       |       |        | 颜色<br>COLOR |
|----------------|-----------|---------------------|-------------|-------|-------|-------|--------|-------------|
|                |           |                     | B(mm)       | L(mm) | F(mm) | H(mm) | DØ(mm) |             |
| SV5.5-3.5      | #6        | 3.7                 | 8.3         | 25.2  | 7.5   | 12.5  | 6.7    | 黄<br>Yellow |
| SVS5.5-4       | #8        | 4.3                 | 8.3         | 25.2  | 7.5   |       |        |             |
| SVL5.5-4       | #8        | 4.3                 | 9.0         | 23.9  | 7.5   |       |        |             |
| SV5.5-5        | #10       | 5.3                 | 9.0         | 23.9  | 7.5   |       |        |             |
| SVS5.5-6       | 1/4       | 6.5                 | 9.0         | 23.9  | 7.5   |       |        |             |
| SVL5.5-6       | 1/4       | 6.5                 | 12.0        | 31.2  | 12.0  |       |        |             |
| SV5.5-8        | 5*16      | 8.4                 | 14.0        | 30.0  | 11.5  |       |        |             |



Insulated Ring Terminals

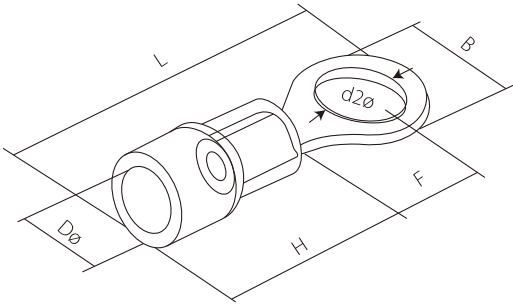

圆形预绝缘端头 Insulated Ring Terminals

导线截面: 0.5~1.5mm²(22-16) 最大电流: I<sub>max</sub>=19A

| 编号<br>ITEM.NO. | 美制<br>螺栓号 | 螺栓口<br>直径<br>d2(mm) | 尺寸DIMENSION |       |       |       |        | 颜色<br>COLOR |
|----------------|-----------|---------------------|-------------|-------|-------|-------|--------|-------------|
|                |           |                     | B(mm)       | L(mm) | F(mm) | H(mm) | DØ(mm) |             |
| RV1.25-3       | #4        | 3.2                 | 5.7         | 17.8  | 4.95  | 10    | 4.3    | 红<br>Red    |
| RVS1.25-3.5    | #6        | 3.7                 | 5.7         | 17.8  | 4.95  |       |        |             |
| RVM1.25-3.5    | #6        | 3.7                 | 6.6         | 20.1  | 6.3   |       |        |             |
| RVL1.25-3.5    | #6        | 3.7                 | 8           | 21.5  | 7     |       |        |             |
| RVS1.25-4      | #8        | 4.3                 | 6.6         | 20.1  | 6.3   |       |        |             |
| RVL1.25-4      | #8        | 4.3                 | 8           | 21.5  | 7     |       |        |             |
| RV1.25-5       | #10       | 5.3                 | 8           | 21.5  | 7     |       |        |             |
| RV1.25-6       | 1/4       | 6.5                 | 11.6        | 27.5  | 11.1  |       |        |             |
| RV1.25-8       | 5/16      | 8.4                 | 11.6        | 27.5  | 11    |       |        |             |
| RV1.25-10      | 3/8       | 10.5                | 13.6        | 31.6  | 13.9  |       |        |             |

导线截面: 1.5~2.5mm²(16-14) 最大电流: I<sub>max</sub>=27A

| 编号<br>ITEM.NO. | 美制<br>螺栓号 | 螺栓口<br>直径<br>d2(mm) | 尺寸DIMENSION |       |       |       |        | 颜色<br>COLOR |
|----------------|-----------|---------------------|-------------|-------|-------|-------|--------|-------------|
|                |           |                     | B(mm)       | L(mm) | F(mm) | H(mm) | DØ(mm) |             |
| RV2-3          | #4        | 3.2                 | 6.6         | 17.8  | 4.3   | 10    | 4.9    | 兰<br>Blue   |
| RVS2-3.5       | #6        | 3.7                 | 6.6         | 17.8  | 4.3   |       |        |             |
| RVM2-3.5       | #6        | 3.7                 | 6.6         | 21.0  | 7.0   |       |        |             |
| RVL2-3.5       | #6        | 3.7                 | 8.5         | 22.5  | 7.75  |       |        |             |
| RVS2-4         | #8        | 4.3                 | 6.6         | 21.0  | 7.0   |       |        |             |
| RVL2-4         | #8        | 4.3                 | 8.5         | 22.5  | 7.75  |       |        |             |
| RVS2-5         | #10       | 5.3                 | 8.5         | 22.5  | 7.75  |       |        |             |
| RVL2-5         | #10       | 5.3                 | 9.5         | 22.5  | 7.25  |       |        |             |
| RV2-6          | 1/4       | 6.5                 | 12.0        | 27.6  | 11.0  |       |        |             |
| RV2-8          | 5/16      | 8.4                 | 12.0        | 27.6  | 11.0  |       |        |             |
| RV2-10         | 3/8       | 10.5                | 13.6        | 30.2  | 13.9  |       |        |             |



导线截面: 2.5~4mm²(14-12) 最大电流: I<sub>max</sub>=37A

| 编号<br>ITEM.NO. | 美制<br>螺栓号 | 螺栓口<br>直径<br>d2(mm) | 尺寸DIMENSION |       |       |       |        | 颜色<br>COLOR |
|----------------|-----------|---------------------|-------------|-------|-------|-------|--------|-------------|
|                |           |                     | B(mm)       | L(mm) | F(mm) | H(mm) | DØ(mm) |             |
| RV3.5-4        | #8        | 4.3                 | 8.0         | 24.5  | 7.7   | 12.5  | 6.2    | 黑<br>Black  |
| RVS3.5-5       | #10       | 5.3                 | 8.0         | 24.5  | 7.7   |       |        |             |
| RVL3.5-5       | #10       | 5.3                 | 12.0        | 27.9  | 7.7   |       |        |             |
| RV3.5-6        | 1/4       | 6.5                 | 12.0        | 27.9  | 7.7   |       |        |             |

导线截面: 4~6mm²(12-10) 最大电流: I<sub>max</sub>=48A

| 编号<br>ITEM.NO. | 美制<br>螺栓号 | 螺栓口<br>直径<br>d2(mm) | 尺寸DIMENSION |       |       |       |        | 颜色<br>COLOR |
|----------------|-----------|---------------------|-------------|-------|-------|-------|--------|-------------|
|                |           |                     | B(mm)       | L(mm) | F(mm) | H(mm) | DØ(mm) |             |
| RV5.5-3.5      | #6        | 3.7                 | 7.2         | 21.4  | 5.9   | 12.5  | 6.7    | 黄<br>Yellow |
| RVS5.5-4       | #8        | 4.3                 | 7.2         | 21.5  | 5.9   |       |        |             |
| RVL5.5-4       | #8        | 4.3                 | 9.5         | 25.5  | 8.3   |       |        |             |
| RV5.5-5        | #10       | 5.3                 | 9.5         | 25.5  | 8.3   |       |        |             |
| RV5.5-6        | 1/4       | 6.5                 | 12.0        | 31.5  | 13.0  |       |        |             |
| RV5.5-8        | 5/16      | 8.4                 | 15.0        | 33.7  | 13.7  |       |        |             |
| RV5.5-10       | 3/8       | 10.5                | 15.0        | 33.7  | 13.7  |       |        |             |
| RV5.5-12       | 1/2       | 13.0                | 19.2        | 38.1  | 16.0  |       |        |             |

Insulated Pin Terminals

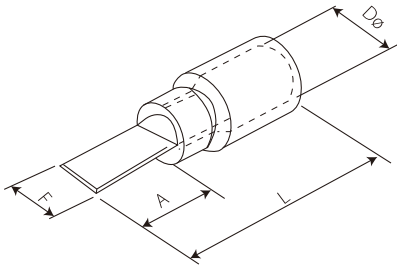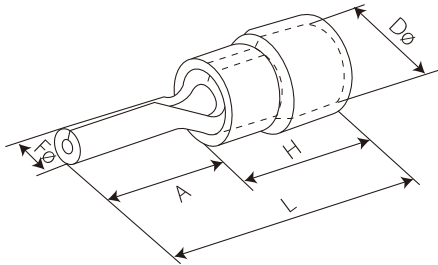

针形预绝缘端头 Insulated Pin Terminals

导线截面: 0.5~1.5mm²(22-16) 最大电流: I<sub>max</sub>=19A

| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |       |        | 颜色<br>COLOR |
|----------------|-------------|-------|-------|--------|-------------|
|                | FØ(mm)      | L(mm) | H(mm) | DØ(mm) |             |
| PTV1.25-9      | 1.9         | 19.0  | 10.0  | 4.3    | 红<br>Red    |
| PTV1.25-10     | 1.9         | 20.0  |       |        |             |
| PTV1.25-12     | 1.9         | 22.0  |       |        |             |
| PTV1.25-13     | 1.9         | 23.0  |       |        |             |
| PTV1.25-18     | 1.9         | 28.0  |       |        |             |

导线截面: 1.5~2.5mm²(16-14) 最大电流: I<sub>max</sub>=27A

| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |       |        | 颜色<br>COLOR |
|----------------|-------------|-------|-------|--------|-------------|
|                | FØ(mm)      | L(mm) | H(mm) | DØ(mm) |             |
| PTV2-9         | 1.9         | 19.0  | 10.0  | 4.9    | 兰<br>Blue   |
| PTV2-10        | 1.9         | 20.0  |       |        |             |
| PTV2-12        | 1.9         | 22.0  |       |        |             |
| PTV2-13        | 1.9         | 23.0  |       |        |             |
| PTV2-18        | 1.9         | 28.0  |       |        |             |

导线截面: 4~6mm²(12-10) 最大电流: I<sub>max</sub>=48A

| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |       |        | 颜色<br>COLOR |
|----------------|-------------|-------|-------|--------|-------------|
|                | FØ(mm)      | L(mm) | H(mm) | DØ(mm) |             |
| PTV5.5-13      | 2.8         | 25.5  | 12.5  | 6.7    | 黄<br>Yellow |

片形预绝缘端头 Insulated Chip-shaped Terminals

导线截面: 0.5~1.5mm²(22-16) 最大电流: I<sub>max</sub>=19A

| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |       |       | 颜色<br>COLOR |
|----------------|-------------|-------|-------|-------|-------------|
|                | W(mm)       | L(mm) | F(mm) | C(mm) |             |
| DBV1.25-10     | 2.3         | 20.0  | 10.0  | 4.3   | 黑<br>Black  |
| DBV1.25-11     | 3.0         | 21.0  | 11.0  |       |             |
| DBV1.25-14     | 3.0         | 24.0  | 14.0  |       |             |
| DBV1.25-18     | 2.3         | 28.0  | 18.0  |       |             |


导线截面: 1.5~2.5mm²(16-14) 最大电流: I<sub>max</sub>=19A

| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |       |       | 颜色<br>COLOR |
|----------------|-------------|-------|-------|-------|-------------|
|                | W(mm)       | L(mm) | F(mm) | C(mm) |             |
| DBV2-9         | 2.8         | 19.0  | 9.0   | 4.9   | 黄<br>Yellow |
| DBV2-15        | 2.3         | 25.0  | 15.0  |       |             |
| DBV2-18        | 2.3         | 28.0  | 18.0  |       |             |

导线截面: 4~6mm²(12-10) 最大电流: I<sub>max</sub>=48A

| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |       |       | 颜色<br>COLOR |
|----------------|-------------|-------|-------|-------|-------------|
|                | W(mm)       | L(mm) | F(mm) | C(mm) |             |
| DBV 5.5-10     | 2.8         | 22.5  | 10.0  | 5.6   | 黄<br>Yellow |

Pin-shaped Naked Terminals

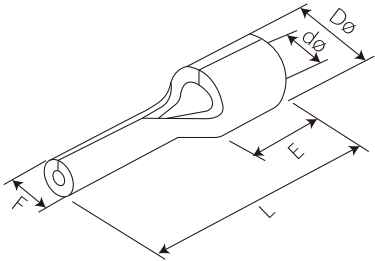

针形裸端头(TZ型)  
Pin-shaped Naked Terminals

导线截面：0.5~1.5mm²( 美国规线22-16) 最大电流：Imax=19A

| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |        |       |        |        |
|----------------|-------------|-------|--------|-------|--------|--------|
|                | B(mm)       | L(mm) | FØ(mm) | E(mm) | DØ(mm) | dØ(mm) |
| PTN1.25-9      | 1.9         | 13.8  | 4.8    | 3.4   |        | 1.7    |
| PTN1.25-10     | 1.9         | 14.8  |        |       |        |        |
| PTN1.25-12     | 1.9         | 16.8  |        |       |        |        |
| PTN1.25-13     | 1.9         | 17.8  |        |       |        |        |
| PTN1.25-18     | 1.9         | 22.8  |        |       |        |        |

导线截面：1.5~2.5mm²(美国规线16-14) 最大电流：Imax=27A

| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |        |       |        |        |
|----------------|-------------|-------|--------|-------|--------|--------|
|                | B(mm)       | L(mm) | FØ(mm) | E(mm) | DØ(mm) | dØ(mm) |
| PTN2-9         | 1.9         | 13.8  | 4.8    | 4.1   |        | 2.3    |
| PTN2-10        | 1.9         | 14.8  |        |       |        |        |
| PTN2-12        | 1.9         | 16.8  |        |       |        |        |
| PTN2-13        | 1.9         | 17.8  |        |       |        |        |


导线截面：2.5~4mm²(美国规线14-12) 最大电流：Imax=37A

| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |        |       |        |        |
|----------------|-------------|-------|--------|-------|--------|--------|
|                | B(mm)       | L(mm) | FØ(mm) | E(mm) | DØ(mm) | dØ(mm) |
| PTN3.5-10      | 2.8         | 14.8  | 4.8    | 4.1   |        | 2.3    |
| PTN3.5-13      | 2.8         | 19.5  |        |       |        |        |

导线截面：4~6mm²(美国规线12-10) 最大电流：Imax=47A

| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |        |       |        |        |
|----------------|-------------|-------|--------|-------|--------|--------|
|                | B(mm)       | L(mm) | FØ(mm) | E(mm) | DØ(mm) | dØ(mm) |
| PTN5.5-13      | 2.8         | 19.8  | 6      | 5.6   |        | 3.4    |

Chip-shaped Naked Terminals

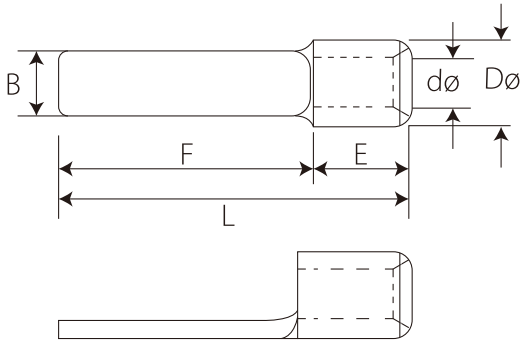

片形裸端头  
Chip-shaped Naked Terminals

导线截面：0.5~1.5mm²( 22-16) 最大电流：Imax=19A

| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |        |       |        |        |
|----------------|-------------|-------|--------|-------|--------|--------|
|                | B(mm)       | L(mm) | FØ(mm) | E(mm) | DØ(mm) | dØ(mm) |
| DBN1.25-10     | 2.3         | 14.8  | 10.0   | 4.8   | 3.4    | 1.7    |
| DBN1.25-11     | 3.0         | 15.8  | 11.0   |       |        |        |
| DBN1.25-14     | 3.0         | 18.8  | 14.0   |       |        |        |
| DBN1.25-18     | 2.3         | 22.8  | 18.0   |       |        |        |

导线截面：1.5~2.5mm²( 16-14) 最大电流：Imax=27A

| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |        |       |        |        |
|----------------|-------------|-------|--------|-------|--------|--------|
|                | B(mm)       | L(mm) | FØ(mm) | E(mm) | DØ(mm) | dØ(mm) |
| DBN2-9         | 2.3         | 13.8  | 9.0    | 4.8   | 4.1    | 2.3    |
| DBN2-18        | 2.3         | 22.8  | 18.0   |       |        |        |

导线截面：4~6mm²( 12~10) 最大电流：Imax=48A

| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |        |       |        |        |
|----------------|-------------|-------|--------|-------|--------|--------|
|                | B(mm)       | L(mm) | FØ(mm) | E(mm) | DØ(mm) | dØ(mm) |
| DBN5.5-10      | 2.8         | 14.8  | 10.0   | 6.0   | 5.6    | 3.4    |
| DBN5.5-14      | 4.5         | 21.2  | 14.0   |       |        |        |
| DBN5.5-18      | 4.5         | 23.0  | 18.0   |       |        |        |
| DBN8-14        | 5.0         | 22.5  | 14.0   | 8.5   | 7.2    | 4.5    |
| DBN14-16       | 6.0         | 30.6  | 16.0   | 14.0  | 9.0    | 6.5    |



Insulated Butt Connectors



长形全绝缘中间接头 Insulated Butt Connectors

| 编号<br>ITEM.NO. | 导线面积<br>CLNLE SQ |                 | 尺寸DIMENSION |        |       | 最大电流<br>IMAX | 绝缘套<br>颜色<br>COLOR |
|----------------|------------------|-----------------|-------------|--------|-------|--------------|--------------------|
|                | A.W.G            | mm <sup>2</sup> | l(mm)       | DØ(mm) | L(mm) |              |                    |
| BV1.25         | 22~16            | 0.5~1.5         | 15          | 1.7    | 26    | 19A          | 红 Red              |
| Bv2            | 16~14            | 1.5~2.5         | 15          | 2.3    | 26    | 27A          | 蓝 Blue             |
| BV5.5          | 12~10            | 4~6             | 15          | 3.4    | 26    | 48A          | 黄 Yellow           |
| Bv8            | #8               | 6~10            | 21          | 4.5    | 32    | 62A          | 红 Red              |
| Bv14           | #6               | 10~16           | 26          | 5.8    | 42    | 88A          | 蓝 Blue             |
| Bv22           | #4               | 16~25           | 29          | 7.7    | 50    | 115A         | 黄 Yellow           |
| BV38           | #2               | 35~50           | 32          | 9.4    | 55    | 160A         | 红 Red              |

| 编号<br>ITEM.NO. | 导线面积<br>CLNLE SQ |                 | 尺寸DIMENSION |        |       | 最大电流<br>IMAX | 绝缘套<br>颜色<br>COLOR |
|----------------|------------------|-----------------|-------------|--------|-------|--------------|--------------------|
|                | A.W.G            | mm <sup>2</sup> | l(mm)       | DØ(mm) | L(mm) |              |                    |
| PVT1.25        | 22~16            | 0.5~1.5         | 8           | 1.7    | 16    | 19A          | 红 Red              |
| PVT2           | 16~14            | 1.5~2.5         | 8           | 2.3    | 16    | 27A          | 蓝 Blue             |
| PVT5.5         | 12~10            | 4~6             | 8.5         | 3.4    | 20.5  | 48A          | 黄 Yellow           |

中间裸接头(TL型) Naked Terminal In The Middle


| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |       | 导线面积CLNLE SQ |                 |
|----------------|-------------|-------|-------|--------------|-----------------|
|                | L(mm)       | D(mm) | d(mm) | A.W.G        | mm <sup>2</sup> |
| BN 1.25        | 15.0        | 3.3   | 1.7   | 22-16        | 0.5-1.5         |
| BN 2           | 15.0        | 4.0   | 2.3   | 16-14        | 1.5-2.5         |
| BN 3.5         | 15.0        | 5.0   | 3.0   | 14-12        | 2.5-4           |
| BN 5.5         | 15.0        | 5.5   | 3.4   | 12-10        | 4-6             |
| BN 8           | 21.0        | 7.1   | 4.5   | #8           | 10              |
| BN 14          | 26.0        | 9.0   | 5.8   | #6           | 16              |
| BN 22          | 29.0        | 11.4  | 7.7   | #4           | 25              |
| BN 38          | 32.0        | 13.3  | 9.4   | #2           | 35              |
| BN 60          | 36.0        | 15.4  | 11.4  | 1/0          | 50              |
| BN 70          | 37.0        | 17.5  | 13.3  | 2/0          | 70              |
| BN 80          | 38.0        | 19.4  | 14.5  | 3/0          | 95              |
| BN 100         | 38.0        | 22.0  | 16.4  | 4/0          | 120             |
| BN 150         | 54.0        | 26.5  | 19.5  | 250-300MCM   | 150             |
| BN 180         | 57.0        | 28.5  | 21.0  | 300-350MCM   | 185             |
| BN 200         | 63.0        | 32.5  | 24.0  | 400MCM       | 240             |
| BN 325         | 72.0        | 37.0  | 28.0  | 500-600MCM   | 300             |

Naked Terminal In The Middle



中间裸接头(GTY型) Naked Terminal In The Middle

| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |       | 导线面积CLNLE SQ |                 |
|----------------|-------------|-------|-------|--------------|-----------------|
|                | L(mm)       | D(mm) | d(mm) | A.W.G        | mm <sup>2</sup> |
| GTY-1.5        | 18.0        | 3.5   | 2.5   | 22-16        | 0.5-1.5         |
| GTY-2.5        | 20.0        | 4.0   | 3.0   | 16-14        | 1.5-2.5         |
| GTY-4          | 22.0        | 5.0   | 3.8   | 14-12        | 2.5-4           |
| GTY-6          | 23.0        | 5.5   | 4.3   | 12-10        | 4-6             |
| GTY-10         | 25.0        | 6.5   | 5.3   | #8           | 10              |
| GTY-16         | 30.0        | 8.0   | 6.6   | #6           | 16              |
| GTY-25         | 35.0        | 9.0   | 7.4   | #4           | 25              |
| GTY-35         | 40.0        | 10.5  | 8.7   | #2           | 35              |
| GTY-50         | 45.0        | 12.0  | 10.0  | 1/0          | 50              |
| GTY-70         | 50.0        | 14.5  | 12.0  | 2/0          | 70              |
| GTY-95         | 55.0        | 17.0  | 14.2  | 3/0          | 95              |
| GTY-120        | 60.0        | 19.0  | 15.6  | 4/0          | 120             |
| GTY-150        | 65.0        | 21.0  | 17.0  | 250-300MCM   | 150             |
| GTY-185        | 70.0        | 23.0  | 19.0  | 300-350MCM   | 185             |
| GTY-240        | 75.0        | 26.0  | 21.4  | -            | 240             |
| GTY-300        | 80.0        | 30.0  | 25.0  | -            | 300             |
| GTY-400        | 85.0        | 34.0  | 28.0  | -            | 400             |
| GTY-500        | 100.0       | 38.0  | 31.0  | -            | 500             |
| GTY-630        | 110.0       | 43.0  | 35.0  | -            | 630             |

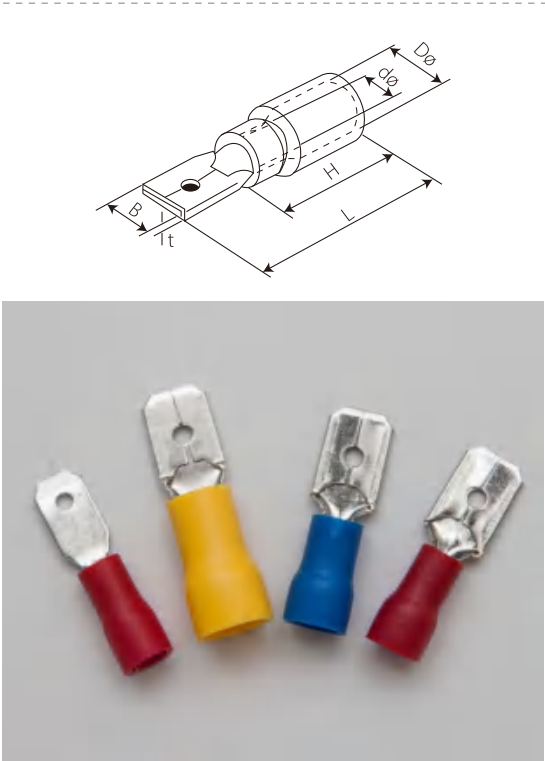

公预绝缘端头 Insulated Male Disconnects

导线截面: 0.5~1.5mm²(22-16) 最大电流: I<sub>max</sub>=10A

| 编号<br>ITEM.NO. | MEMA TAB<br>(mm) | 材料厚度<br>Thickness<br>of material<br>(mm) | 尺寸DIMENSION |        |        |       |       |
|----------------|------------------|------------------------------------------|-------------|--------|--------|-------|-------|
|                |                  |                                          | B(mm)       | dØ(mm) | DØ(mm) | L(mm) | H(mm) |
| MDD1.25-110(8) | 0.8×2.8          | 0.8                                      | 2.8         | 1.7    | 4.3    | 17.7  | 10    |
| MDD1.25-187(5) | 0.5×4.7          | 0.5                                      | 4.75        | 1.7    | 4.3    | 20.0  |       |
| MDD1.25-187(8) | 50.8×4.7         | 0.8                                      | 4.75        | 1.7    | 4.3    | 18.5  |       |
| MDD1.25-250    | 50.8×6.35        | 0.4                                      | 6.35        | 1.7    | 4.3    | 21.0  |       |


导线截面: 1.5~2.5mm²(16-14) 最大电流: I<sub>max</sub>=15A

| 编号<br>ITEM.NO. | MEMA TAB<br>(mm) | 材料厚度<br>Thickness<br>of material<br>(mm) | 尺寸DIMENSION |        |        |       |       |
|----------------|------------------|------------------------------------------|-------------|--------|--------|-------|-------|
|                |                  |                                          | B(mm)       | dØ(mm) | DØ(mm) | L(mm) | H(mm) |
| MDD2-187(5)    | 0.5×4.7          | 0.5                                      | 4.7         | 2.3    | 4.3    | 20.0  | 10    |
| MDD2-187(8)    | 50.8×4.7         | 0.8                                      | 54.7        | 2.3    | 4.3    | 18.5  |       |
| MDD2-250       | 50.8×6.35        | 0.4                                      | 56.35       | 2.3    | 4.3    | 21.0  |       |

导线截面: 4~6mm²(12-10) 最大电流: I<sub>max</sub>=24A

| 编号<br>ITEM.NO. | MEMA TAB<br>(mm) | 材料厚度<br>Thickness<br>of material<br>(mm) | 尺寸DIMENSION |        |        |       |       |
|----------------|------------------|------------------------------------------|-------------|--------|--------|-------|-------|
|                |                  |                                          | B(mm)       | dØ(mm) | DØ(mm) | L(mm) | H(mm) |
| MDD5.5-250     | 0.8×6.35         | 0.4                                      | 6.35        | 3.4    | 5.7    | 25.0  | 14    |

Insulated Female Disconnects

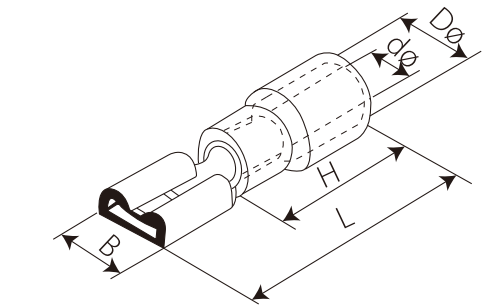

母预绝缘端头 Insulated Female Disconnects

导线截面: 0.5~1.5mm²(22-16) 最大电流: I<sub>max</sub>=10A

| 编号<br>ITEM.NO. | MEMA TAB<br>(mm) | 材料厚度<br>Thickness<br>of material<br>(mm) | 尺寸DIMENSION |        |        |       |       |
|----------------|------------------|------------------------------------------|-------------|--------|--------|-------|-------|
|                |                  |                                          | B(mm)       | dØ(mm) | DØ(mm) | L(mm) | H(mm) |
| FDD1.25-110(5) | 0.5×2.8          | 0.3                                      | 3.8         | 1.7    | 3.8    | 19    | 10    |
| FDD1.25-110(8) | 0.8×2.8          | 0.3                                      | 3.8         | 1.7    | 3.8    | 19    |       |
| FDD1.25-187(5) | 0.5×4.75         | 0.35                                     | 5.6         | 1.7    | 3.8    | 19    |       |
| FDD1.25-187(8) | 0.8×4.7          | 0.35                                     | 5.6         | 1.7    | 3.8    | 19    |       |
| FDD1.25-205    | 50.5×5.2         | 0.35                                     | 6.5         | 1.7    | 3.8    | 20    |       |
| FDD1.25-250    | 0.8×6.35         | 0.4                                      | 7.4         | 1.7    | 3.8    | 21    |       |

导线截面: 1.5~2.5mm²(16-14) 最大电流: I<sub>max</sub>=15A


| 编号<br>ITEM.NO. | MEMA TAB<br>(mm) | 材料厚度<br>Thickness<br>of material<br>(mm) | 尺寸DIMENSION |        |        |       |       |
|----------------|------------------|------------------------------------------|-------------|--------|--------|-------|-------|
|                |                  |                                          | B(mm)       | dØ(mm) | DØ(mm) | L(mm) | H(mm) |
| FDD2-110(5)    | 0.5×2.8          | 0.3                                      | 3.8         | 2.3    | 4.3    | 19    | 10    |
| FDD2-110(8)    | 0.8×2.8          | 0.3                                      | 3.8         | 2.3    | 4.3    | 19    |       |
| FDD2-187(5)    | 0.5×4.7          | 0.35                                     | 5.6         | 2.3    | 4.3    | 19    |       |
| FDD2-187(8)    | 50.8×4.7         | 0.35                                     | 5.6         | 2.3    | 4.3    | 19    |       |
| FDD2-205       | 50.5×5.2         | 0.35                                     | 6.5         | 2.3    | 4.3    | 20    |       |
| FDD2-250       | 0.8×6.3          | 0.4                                      | 7.4         | 2.3    | 4.3    | 21    |       |
| FDD2-312       | 50.8×8.0         | 0.4                                      | 9           | 2.3    | 4.3    | 23    |       |

导线截面: 4~6mm²(12-10) 最大电流: I<sub>max</sub>=24A


| 编号<br>ITEM.NO. | MEMA TAB<br>(mm) | 材料厚度<br>Thickness<br>of material<br>(mm) | 尺寸DIMENSION |        |        |       |       |
|----------------|------------------|------------------------------------------|-------------|--------|--------|-------|-------|
|                |                  |                                          | B(mm)       | dØ(mm) | DØ(mm) | L(mm) | H(mm) |
| FDD5.5-250     | 0.5×6.35         | 0.4                                      | 7.4         | 3.4    | 5.7    | 25    | 14    |
| FDD5.5-375     | 1.2×9.4          | 0.5                                      | 10.9        | 3.4    | 5.7    | 29.6  |       |

Insulated Bullet Disconnects

MALE

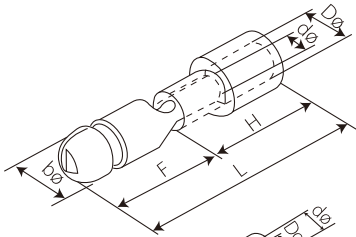

FEMALE

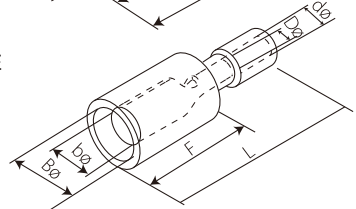

子弹形公预绝缘端头 Insulated Bullet Disconnects

导线截面: 0.5~1.5mm²(22-16) 最大电流: I<sub>max</sub>=10A

| 编号<br>ITEM.NO. | 材料厚度<br>Thickness<br>of material<br>(mm) | 尺寸DIMENSION |       |        |        |       |       | 颜色<br>COLOR |
|----------------|------------------------------------------|-------------|-------|--------|--------|-------|-------|-------------|
|                |                                          | bØ(mm)      | F(mm) | DØ(mm) | dØ(mm) | H(mm) | L(mm) |             |
| MPD1.25-156    | 0.4                                      | 4           | 11    | 2.7    | 1.7    | 10    | 21    | 红Red        |

导线截面: 1.5~2.5mm²(16-14) 最大电流: I<sub>max</sub>=15A

| 编号<br>ITEM.NO. | 材料厚度<br>Thickness<br>of material<br>(mm) | 尺寸DIMENSION |       |        |        |       |       | 颜色<br>COLOR |
|----------------|------------------------------------------|-------------|-------|--------|--------|-------|-------|-------------|
|                |                                          | bØ(mm)      | F(mm) | DØ(mm) | dØ(mm) | H(mm) | L(mm) |             |
| MPD2-156       | 0.4                                      | 4           | 16    | 2.7    | 1.7    | 10    | 21    | 蓝Blue       |
| MPD2-195       | 0.4                                      | 5           | 16    | 2.7    | 1.7    | 10    | 21    |             |

导线截面: 4~6mm²(12-10) 最大电流: I<sub>max</sub>=24A

| 编号<br>ITEM.NO. | 材料厚度<br>Thickness<br>of material<br>(mm) | 尺寸DIMENSION |       |        |        |       |       | 颜色<br>COLOR |
|----------------|------------------------------------------|-------------|-------|--------|--------|-------|-------|-------------|
|                |                                          | bØ(mm)      | F(mm) | DØ(mm) | dØ(mm) | H(mm) | L(mm) |             |
| MPD5.5-195     | 0.4                                      | 5           | 11    | 4.5    | 3.4    | 14    | 25    | 黄Yellow     |

子弹形母预绝缘端头 Insulated Receptacle Disconnects

导线截面: 0.5~1.5mm²(22-16) 最大电流: I<sub>max</sub>=10A

| 编号<br>ITEM.NO. | 材料厚度<br>Thickness<br>of material<br>(mm) | 尺寸DIMENSION |       |        |        |       |       | 颜色<br>COLOR |
|----------------|------------------------------------------|-------------|-------|--------|--------|-------|-------|-------------|
|                |                                          | bØ(mm)      | F(mm) | DØ(mm) | dØ(mm) | H(mm) | L(mm) |             |
| FRD1.25-156    | 0.4                                      | 4           | 16    | 2.7    | 1.7    | 13    | 24.5  | 红Red        |

导线截面: 1.5~2.5mm²(16-14) 最大电流: I<sub>max</sub>=15A

| 编号<br>ITEM.NO. | 材料厚度<br>Thickness<br>of material<br>(mm) | 尺寸DIMENSION |       |        |        |       |       | 颜色<br>COLOR |
|----------------|------------------------------------------|-------------|-------|--------|--------|-------|-------|-------------|
|                |                                          | bØ(mm)      | F(mm) | DØ(mm) | dØ(mm) | H(mm) | L(mm) |             |
| FRD2-156       | 0.4                                      | 4           | 6.3   | 3.3    | 2.3    | 14    | 24.5  | 蓝Blue       |
| FRD2-195       | 0.4                                      | 5           | 7     | 3.3    | 2.3    | 14    | 24.5  |             |

导线截面: 4~6mm²(112-10) 最大电流: I<sub>max</sub>=24A


| 编号<br>ITEM.NO. | 材料厚度<br>Thickness<br>of material<br>(mm) | 尺寸DIMENSION |       |        |        |       |       | 颜色<br>COLOR |
|----------------|------------------------------------------|-------------|-------|--------|--------|-------|-------|-------------|
|                |                                          | bØ(mm)      | F(mm) | DØ(mm) | dØ(mm) | H(mm) | L(mm) |             |
| FRD5.5-195     | 0.4                                      | 5           | 7     | 4.5    | 3.4    | 14    | 29.5  | 黄Yellow     |



Fully Vinyl Insulated Disconnects



母全绝缘接头  
Fully Vinyl Insulated Disconnects

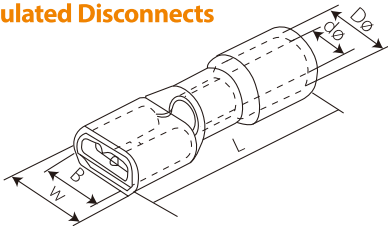

导线截面: 0.5~1.5mm²(22-16) 最大电流: I<sub>max</sub>=10A


| 编号<br>ITEM.NO.  | MEMATAB<br>(mm) | 尺寸DIMENSION |       |        |        |       |
|-----------------|-----------------|-------------|-------|--------|--------|-------|
|                 |                 | W(mm)       | B(mm) | DØ(mm) | dØ(mm) | L(mm) |
| FDFD1.25-110(5) | 0.5x2.8         | 3.8         | 3.2   | 2.7    | 1.7    | 19    |
| FDFD1.25-110(8) | 0.8x2.8         | 3.8         | 3.2   | 2.7    | 1.7    | 19    |
| FDFD1.25-187(5) | 0.5x4.75        | 5.6         | 5     | 4      | 1.7    | 20    |
| FDFD1.25-187(8) | 0.8x4.75        | 5.6         | 5     | 4      | 1.7    | 20    |
| FDFD1.25-250    | 0.8x6.35        | 7.4         | 6.6   | 4      | 1.7    | 21.5  |

导线截面: 1.5~2.5mm²(16-14) 最大电流: I<sub>max</sub>=15A

| 编号<br>ITEM.NO. | MEMATAB<br>(mm) | 尺寸DIMENSION |       |        |        |       |
|----------------|-----------------|-------------|-------|--------|--------|-------|
|                |                 | W(mm)       | B(mm) | DØ(mm) | dØ(mm) | L(mm) |
| FDFD2-187(5)   | 0.5x4.75        | 5.6         | 5     | 4.5    | 2.3    | 20    |
| FDFD2-187(8)   | 0.8x4.75        | 5.6         | 5     | 4.5    | 2.3    | 20    |
| FDFD2-250      | 0.8x6.35        | 7.4         | 6.6   | 4.5    | 2.3    | 21.5  |

导线截面: 4~6mm²(12-10) 最大电流: I<sub>max</sub>=24A

| 编号<br>ITEM.NO. | MEMATAB<br>(mm) | 尺寸DIMENSION |       |        |        |       |
|----------------|-----------------|-------------|-------|--------|--------|-------|
|                |                 | W(mm)       | B(mm) | DØ(mm) | dØ(mm) | L(mm) |
| FDFD5.5-250    | 0.8x6.35        | 7.4         | 6.6   | 5.7    | 3.4    | 25.5  |



肩背形公母全绝缘接头  
Insulated Piggy Back Disconnector

导线截面: 0.5~1.5mm²(22-16) 最大电流: I<sub>max</sub>=10A

| 编号<br>ITEM.NO. | MEMATAB<br>(mm) | 尺寸DIMENSION |        |       |        |        |       |
|----------------|-----------------|-------------|--------|-------|--------|--------|-------|
|                |                 | B(mm)       | B1(mm) | B(mm) | DØ(mm) | dØ(mm) | L(mm) |
| PBDD1.25-250   | 0.8x6.35        | 7.4         | 6.3    | 10    | 3.8    | 1.7    | 21.5  |


导线截面: 1.5~2.5mm²(16-14) 最大电流: I<sub>max</sub>=15A

| 编号<br>ITEM.NO. | MEMATAB<br>(mm) | 尺寸DIMENSION |        |       |        |        |       |
|----------------|-----------------|-------------|--------|-------|--------|--------|-------|
|                |                 | B(mm)       | B1(mm) | B(mm) | DØ(mm) | dØ(mm) | L(mm) |
| PBDD2-250      | 0.8x6.35        | 7.4         | 6.3    | 10    | 4.3    | 2.3    | 21.5  |

导线截面: 4~6mm²(12-10) 最大电流: I<sub>max</sub>=24A

| 编号<br>ITEM.NO. | MEMATAB<br>(mm) | 尺寸DIMENSION |        |       |        |        |       |
|----------------|-----------------|-------------|--------|-------|--------|--------|-------|
|                |                 | B(mm)       | B1(mm) | B(mm) | DØ(mm) | dØ(mm) | L(mm) |
| PBDD5.5-250    | 0.8x6.35        | 7.4         | 6.3    | 14    | 5.7    | 3.4    | 25    |


Insulated Cord End Terminals

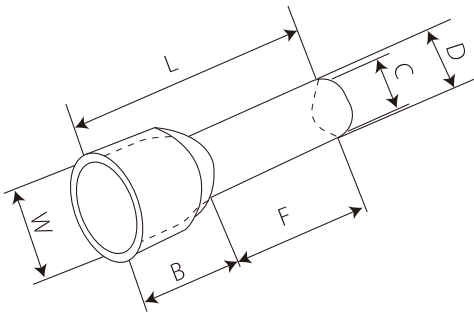

管形预绝缘端头  
Insulated Cord End Terminals

| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |       |       |       |       | 导线面积 CLNLE SQ |                 | 绝缘套<br>颜色<br>COLOR          |
|----------------|-------------|-------|-------|-------|-------|-------|---------------|-----------------|-----------------------------|
|                | F(mm)       | L(mm) | W(mm) | B(mm) | D(mm) | C(mm) | AWG           | mm <sup>2</sup> |                             |
| E0506          | 6           | 12    | 2.6   | 6     | 1.3   | 1     | #22           | 0.5             | 白色 White<br>橙色 Orange       |
| E0508          | 8           | 14    |       |       |       |       |               |                 |                             |
| E0510          | 10          | 16    |       |       |       |       |               |                 |                             |
| E0512          | 12          | 18    |       |       |       |       |               |                 |                             |
| E7506          | 6           | 12.4  | 2.8   | 6.4   | 1.5   | 1.2   | #20           | 0.75            | 白色 White<br>蓝色 Blue         |
| E7508          | 8           | 14.6  |       |       |       |       |               |                 |                             |
| E7510          | 10          | 16.4  |       |       |       |       |               |                 |                             |
| E7512          | 12          | 18.4  |       |       |       |       |               |                 |                             |
| E7518          | 18          | 24.4  |       |       |       |       |               |                 |                             |
| E1006          | 6           | 12.4  | 3     | 6.4   | 1.7   | 1.4   | #18           | 1               | 黄色 Yellow<br>红色 Red         |
| E1008          | 8           | 14.6  |       |       |       |       |               |                 |                             |
| E1010          | 10          | 16.4  |       |       |       |       |               |                 |                             |
| E1012          | 12          | 18.4  |       |       |       |       |               |                 |                             |
| E1508          | 8           | 14.6  | 3.5   | 6.4   | 2     | 1.7   | #16           | 1.5             | 红色 Red<br>黑色 Black          |
| E1510          | 10          | 16.4  |       |       |       |       |               |                 |                             |
| E1518          | 18          | 24.4  |       |       |       |       |               |                 |                             |
| E2508          | 8           | 15.2  | 4     | 7     | 2.6   | 2.3   | #14           | 2.5             | 兰色 Blue<br>灰色 Grey          |
| E2512          | 12          | 19    |       |       |       |       |               |                 |                             |
| E2518          | 18          | 25    |       |       |       |       |               |                 |                             |
| E4009          | 9           | 16.5  | 4.4   | 7.5   | 3.2   | 2.8   | #12           | 4               | 灰色 Grey<br>橙色 Orange        |
| E4012          | 12          | 19.5  |       |       |       |       |               |                 |                             |
| E4018          | 18          | 25.5  |       |       |       |       |               |                 |                             |
| E6012          | 12          | 20    | 6.3   | 8     | 3.9   | 3.5   | #10           | 6               | 黑色 Black<br>绿色 Green        |
| E6018          | 18          | 26    |       |       |       |       |               |                 |                             |
| E10-12         | 12          | 21.5  | 7.6   | 9.5   | 4.9   | 4.5   | #7            | 10              | 乳白色 Milky white<br>褐色 Brown |
| E10-18         | 18          | 27.5  |       |       |       |       |               |                 |                             |
| E16-12         | 12          | 22.2  | 8.8   | 10.2  | 6.2   | 5.8   | #5            | 16              | 绿色 Green<br>乳白色 Milky white |
| E16-18         | 18          | 28.2  |       |       |       |       |               |                 |                             |
| E25-16         | 16          | 29    | 11.2  | 13    | 7.9   | 7.5   | #4            | 25              | 褐(棕) brown<br>黑色 black      |
| E25-22         | 22          | 35    |       |       |       |       |               |                 |                             |
| E35-16         | 16          | 30    | 12.7  | 14    | 8.7   | 8.3   | #2            | 35              | 灰褐色 Greyish brown           |
| E35-25         | 25          | 39    |       |       |       |       |               |                 |                             |
| E50-20         | 20          | 36    | 15.3  | 16    | 10.9  | 10.3  | #1            | 50              | 橄榄色 Olive                   |
| E50-25         | 25          | 41    |       |       |       |       |               |                 |                             |

Grewel Tube Pre-insulating Terminal

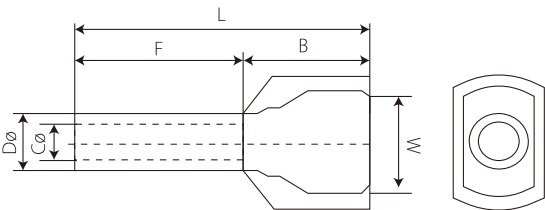


双线管形预绝缘端头 Grewel Tube Pre-insulating Terminal

最大耐压：150℃Ui=300V 材质：紫铜管绝缘套材料：尼龙


| 编号<br>ITEM.NO. | CONDUCTOR<br>mm <sup>2</sup> | 尺寸DIMENSION |       |       |       |        |        | 颜色<br>COLOR              |
|----------------|------------------------------|-------------|-------|-------|-------|--------|--------|--------------------------|
|                |                              | F(mm)       | L(mm) | W(mm) | B(mm) | DØ(mm) | CØ(mm) |                          |
| TE-0508        | 2×0.5                        | 8           | 14.5  | 5     | 6.5   | 1.8    | 1.5    | 白色White                  |
| TE-7508        | 2×0.75                       | 8           | 14.7  | 5.5   | 6.7   | 2.1    | 1.8    | 兰色Blue<br>灰色Grey         |
| TE-7510        | 2×0.75                       | 10          | 16.07 | 5.5   | 6.7   | 2.1    | 1.8    |                          |
| TE-1008        | 2×1.0                        | 8           | 15.1  | 5.5   | 7.1   | 2.3    | 2      | 红色red                    |
| TE-1010        | 2×1.0                        | 10          | 17.1  | 5.5   | 7.1   | 2.3    | 2      |                          |
| TE-1508        | 2×1.5                        | 8           | 15.5  | 6.4   | 7.2   | 2.6    | 2.3    | 黑色Black                  |
| TE-1512        | 2×1.5                        | 12          | 19.5  | 6.4   | 7.5   | 2.6    | 2.3    |                          |
| TE-2510        | 2×2.5                        | 10          | 18.5  | 8     | 8.5   | 3.3    | 2.9    | 灰色Grey                   |
| TE-2513        | 2×2.5                        | 13          | 21.5  | 8     | 8.5   | 3.3    | 2.9    | 兰色Blue                   |
| TE-4012        | 2×4.0                        | 12          | 23.1  | 8.8   | 11.1  | 4.2    | 3.8    | 橙色Oranage<br>灰色Grey      |
| TE-6014        | 2×6.0                        | 14          | 26.1  | 9.5   | 12.1  | 5.3    | 4.9    | 绿色Green<br>黄色Yellow      |
| TE-10-14       | 2×10.0                       | 14          | 26.6  | 12.6  | 12    | 6.9    | 6.5    | 棕色brown<br>红色red         |
| TE-16-14       | 2×16.0                       | 14          | 31.3  | 19    | 17.3  | 8.7    | 8.3    | 乳白色Milky white<br>兰色Blue |

管形裸端头(TG型) Cord End Terminals TG

| 编号<br>ITEM.NO. | 尺寸DIMENSION |       |       |       |       | WIRE RANGE |                 |
|----------------|-------------|-------|-------|-------|-------|------------|-----------------|
|                | L(mm)       | D(mm) | C(mm) | B(mm) | W(mm) | AWG        | mm <sup>2</sup> |
| EN0506         | 6           | 1.3   | 1     | 0.7   | 2.1   | #22        | 0.5             |
| EN75.6         | 6           | 1.5   | 1.2   | 0.7   | 2.5   | #20        | 0.75            |
| EN1006         | 6           | 1.7   | 1.4   | 0.7   | 2.7   | #18        | 1               |
| EN1010         | 10          |       |       |       |       |            |                 |
| EN1507         | 7           | 2     | 1.7   | 1     | 3.5   | #16        | 1.5             |
| EN1510         | 10          |       |       |       |       |            |                 |
| EN2507         | 7           | 2.5   | 2.2   | 1     | 2.5   | #14        | 2.5             |
| EN2512         | 12          |       |       |       |       |            |                 |
| EN4009         | 9           | 3.2   | 2.8   | 1     | 4     | #12        | 4               |
| EN4012         | 12          |       |       |       |       |            |                 |
| EN6010         | 10          | 3.9   | 3.5   | 1     | 4.8   | #10        | 6               |
| EN6012         | 12          |       |       |       |       |            |                 |
| EN6015         | 15          |       |       |       |       |            |                 |
| EN10-12        | 12          | 4.9   | 4.5   | 1.2   | 5.8   | #7         | 10              |
| EN10-15        | 15          |       |       |       |       |            |                 |
| EN10-18        | 18          |       |       |       |       |            |                 |
| EN16-12        | 12          | 6.2   | 5.8   | 1.5   | 7.5   | #5         | 16              |
| EN16-15        | 15          |       |       |       |       |            |                 |
| EN16-18        | 18          |       |       |       |       |            |                 |
| EN25-16        | 16          | 7.9   | 7.5   | 1.8   | 9.2   | 4          | 25              |
| EN25-22        | 22          |       |       |       |       |            |                 |
| EN35-16        | 16          | 8.7   | 8.3   | 2     | 10    | 2          | 35              |
| EN35-25        | 25          |       |       |       |       |            |                 |
| EN50-20        | 20          | 10.9  | 10.3  | 2     | 12.4  | 1          | 50              |
| EN50-25        | 25          |       |       |       |       |            |                 |

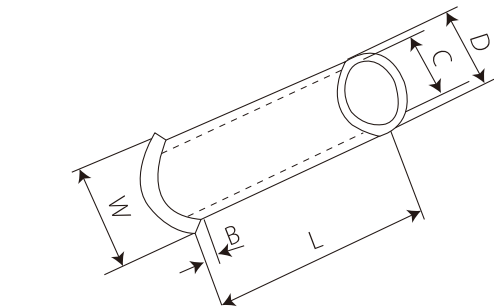

Male And Female Full-insualting Joint(nylon)

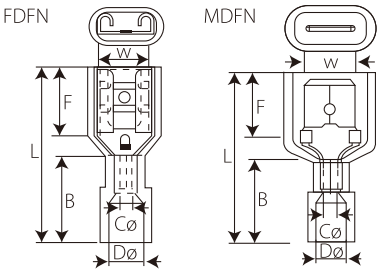

公、母全绝缘端头(尼龙) Male And Female Full-insualting Joint(nylon)

最大电流：10A 材质：黄铜绝缘套材料：尼龙

| 编号<br>ITEM.NO. | 接插规格<br>Mema Tab<br>(mm) | 尺寸DIMENSION F(mm) |       |       |       |        |        |       | 导线面积<br>WIRE RANGE<br>mm <sup>2</sup> | 颜色<br>COLOR |
|----------------|--------------------------|-------------------|-------|-------|-------|--------|--------|-------|---------------------------------------|-------------|
|                |                          | W(mm)             | F(mm) | L(mm) | B(mm) | DØ(mm) | CØ(mm) | T(mm) |                                       |             |
| FDFN 1.25-250  | 0.8×6.35                 | 6.6               | 7.3   | 22    | 11    | 4      | 1.7    | 0.4   | 22-16AWG<br>0.5-1.5mm <sup>2</sup>    | 红Red        |
| MDFN 1.25-250  |                          | 6.35              | 7.7   | 23    |       |        |        |       |                                       |             |

最大电流：15A 材质：黄铜绝缘套材料：尼龙

| 编号<br>ITEM.NO. | 接插规格<br>Mema Tab<br>(mm) | 尺寸DIMENSION F(mm) |       |       |       |        |        |       | 导线面积<br>WIRE RANGE<br>mm <sup>2</sup> | 颜色<br>COLOR |
|----------------|--------------------------|-------------------|-------|-------|-------|--------|--------|-------|---------------------------------------|-------------|
|                |                          | W(mm)             | F(mm) | L(mm) | B(mm) | DØ(mm) | CØ(mm) | T(mm) |                                       |             |
| FDFN 2-250     | 0.8×6.35                 | 6.6               | 7.3   | 22    | 11    | 4      | 2.3    | 0.4   | 16-14AWG<br>1.5-2.5mm <sup>2</sup>    | 蓝Blue       |
| MDFN 2-250     |                          | 6.35              | 7.7   | 23    |       |        |        |       |                                       |             |

最大电流：24A 材质：黄铜绝缘套材料：尼龙

| 编号<br>ITEM.NO. | 接插规格<br>Mema Tab<br>(mm) | 尺寸DIMENSION F(mm) |       |       |       |        |        |       | 导线面积<br>WIRE RANGE<br>mm <sup>2</sup> | 颜色<br>COLOR  |
|----------------|--------------------------|-------------------|-------|-------|-------|--------|--------|-------|---------------------------------------|--------------|
|                |                          | W(mm)             | F(mm) | L(mm) | B(mm) | DØ(mm) | CØ(mm) | T(mm) |                                       |              |
| FDFN 5.5-250   | 0.8×6.35                 | 6.6               | 7.3   | 24    | 13    | 6.3    | 3.4    | 0.4   | 12-10AWG<br>4-6mm <sup>2</sup>        | 黄色<br>Yellow |
| MDFN 5.5-250   |                          | 6.35              | 7.7   | 25    |       |        |        |       |                                       |              |

最大电流：10A 材质：黄铜绝缘套材料：尼龙

| 编号<br>ITEM.NO. | 接插规格<br>Mema Tab<br>(mm) | 尺寸DIMENSION F(mm) |       |       |       |        |        |       | 导线面积<br>WIRE RANGE<br>mm <sup>2</sup> | 颜色<br>COLOR |
|----------------|--------------------------|-------------------|-------|-------|-------|--------|--------|-------|---------------------------------------|-------------|
|                |                          | W(mm)             | F(mm) | L(mm) | B(mm) | DØ(mm) | CØ(mm) | T(mm) |                                       |             |
| FDFNY 1.25-250 | 0.8×6.35                 | 6.6               | 7.3   | 22    | 12    | 4      | 1.7    | 0.45  | 22-16AWG<br>0.5-1.5mm <sup>2</sup>    | 红色<br>Red   |
| MDFNY 1.25-250 |                          | 6.35              | 7.7   | 23    | 11    | 4      | 1.7    | 0.8   |                                       |             |

最大电流：15A 材质：黄铜绝缘套材料：尼龙

| 编号<br>ITEM.NO. | 接插规格<br>Mema Tab<br>(mm) | 尺寸DIMENSION F(mm) |       |       |       |        |        |       | 导线面积<br>WIRE RANGE<br>mm <sup>2</sup> | 颜色<br>COLOR |
|----------------|--------------------------|-------------------|-------|-------|-------|--------|--------|-------|---------------------------------------|-------------|
|                |                          | W(mm)             | F(mm) | L(mm) | B(mm) | DØ(mm) | CØ(mm) | T(mm) |                                       |             |
| FDFNY 2-250    | 0.8×6.35                 | 6.6               | 7.3   | 23    | 12    | 4.5    | 2.3    | 0.45  | 16-14AWG<br>1.5-2.5mm <sup>2</sup>    | 蓝Blue       |
| MDFNY 2-250    |                          | 6.35              | 7.7   | 24    | 11    | 4.5    | 2.3    | 0.8   |                                       |             |

最大电流：24A 材质：黄铜绝缘套材料：尼龙



| 编号<br>ITEM.NO. | 接插规格<br>Mema Tab<br>(mm) | 尺寸DIMENSION F(mm) |       |       |       |        |        |       | 导线面积<br>WIRE RANGE<br>mm <sup>2</sup> | 颜色<br>COLOR  |
|----------------|--------------------------|-------------------|-------|-------|-------|--------|--------|-------|---------------------------------------|--------------|
|                |                          | W(mm)             | F(mm) | L(mm) | B(mm) | DØ(mm) | CØ(mm) | T(mm) |                                       |              |
| FDFNY 5.5-250  | 0.8×6.35                 | 6.6               | 7.3   | 23    | 12    | 5      | 3.4    | 0.45  | 12-10AWG<br>4-6mm <sup>2</sup>        | 黄色<br>Yellow |
| MDFNY 5.5-250  |                          | 6.35              | 7.7   | 24    | 11    | 5      | 3.4    | 0.8   |                                       |              |



Long Full-Insulating Middle Joint(Nylon)

长线全绝缘中间端头(尼龙)  
Long Full-Insulating Middle Joint(Nylon)

最大电流: 26-22 A.W.G:9A    22-16A.W.G:19A    16-14A.W.G:27A    12-10A.W.G:48A  
最大耐压: 105°C Ui=600V NYLON

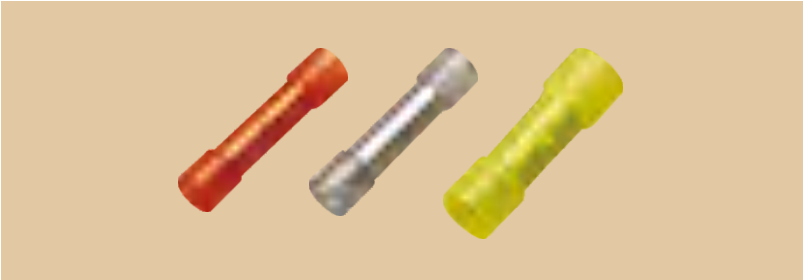

| 编号<br>ITEM.NO. | 尺寸 DIMENSION |        |        | 导线面积<br>A.W.G mm²      | 颜色<br>COLOR |
|----------------|--------------|--------|--------|------------------------|-------------|
|                | L(mm)        | Dø(mm) | Cø(mm) |                        |             |
| BNY-1.25       | 27.3         | 3.2    | 1.7    | 22-16 A.W.G 0.5-1.5mm2 | 红Red        |
| BNY-2          | 27.3         | 3.8    | 2.3    | 16-14 A.W.G 1.5-2.5mm2 | 蓝Blue       |
| BNY-5.5        | 27.3         | 5.3    | 3.4    | 12-10 A.W.G 4-6mm2     | 黄色Yellow    |



防水热缩中接管端子 Heat Shrinking Middle Joint

- 材料: 外层(交联热缩聚烯烃),内层(热熔性粘接剂),连接管(镀锡紫铜管)。
- 收缩倍率: 4:1。
- 特点: 绝缘保护、防水、防潮、防盐雾腐蚀;优异的密封性,有效抵抗液体和潮气的 入侵与腐蚀;半硬质聚烯烃材质,优异的机械性能耐磨损性能,对线束连接 外及终端提供优良的耐磨损和应力保护性能;优良的耐油性,特别适合机械\液压环境下使用。
- 工作温度: -55°C-125°C。



| 编号<br>ITEM.NO. | 尺寸 DIMENSION |        |        | 导线面积<br>A.W.G mm²      | 颜色<br>COLOR |
|----------------|--------------|--------|--------|------------------------|-------------|
|                | L(mm)        | Dø(mm) | Cø(mm) |                        |             |
| KY-1           | 37           | 6.0    | 1.7    | 22-16 A.W.G 0.5-1.5mm2 | 红Red        |
| KY-2           | 37           | 7.5    | 2.3    | 16-14 A.W.G 1.5-2.5mm2 | 蓝Blue       |
| KY-5           | 37           | 8.0    | 3.4    | 12-10 A.W.G 4-6mm2     | 黄色Yellow    |



片式插接件插座 6.3  
Fully Vinyl Insulated Disconnects

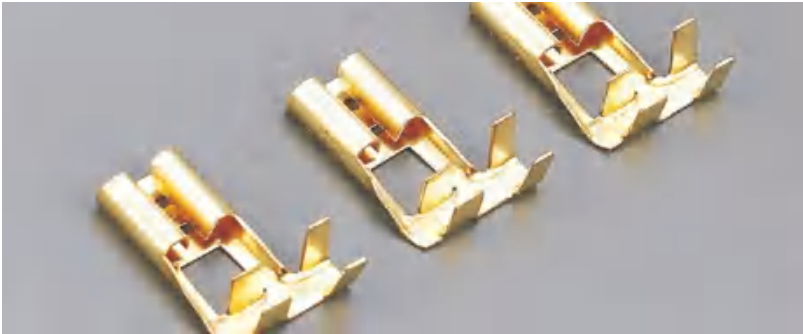

| 编号<br>ITEM.NO. | 材质<br>METAL | 适用电线<br>RANGE | 尺寸 DIMENSION |       |       | 材料厚度<br>L(mm) |
|----------------|-------------|---------------|--------------|-------|-------|---------------|
|                |             |               | W(mm)        | L(mm) | E(mm) |               |
| DJ6211-D6.3B   | BRASS       | 1.0-1.5       | 7.7          | 13.8  | 7.7   | 0.35          |



Electrical Connector

Ring Terminals

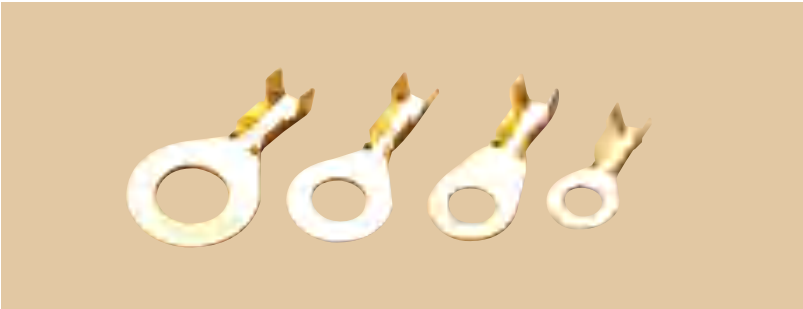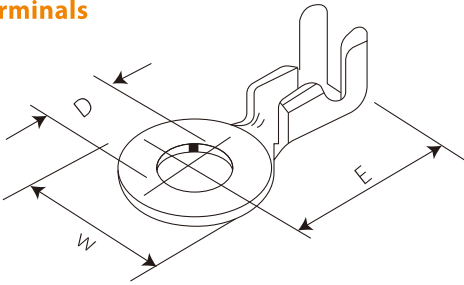

| 编号<br>ITEM.NO. | 材质<br>METAL | 适用电线<br>RANGE | 尺寸 DIMENSION |       |       | 材料厚度<br>L(mm) |
|----------------|-------------|---------------|--------------|-------|-------|---------------|
|                |             |               | W(mm)        | L(mm) | E(mm) |               |
| Y3-2.5         | BRASS       | 0.5-2.5       | 3.2          | 9     | 17    | 0.6           |
| DJ431-3A       | BRASS       | 0.5-0.8       | 3.5          | 10    | 17    | 0.5           |
| DJ431-5A       | BRASS       | 0.5-0.8       | 5.2          | 12    | 17    | 0.5           |
| DJ431-6A       | BRASS       | 0.5-0.8       | 6.2          | 15    | 17    | 0.5           |
| DJ431-8B       | BRASS       | 1.0-1.5       | 8.2          | 19    | 19    | 0.8           |
| DJ431-10B      | BRASS       | 1.0-1.5       | 10.5         | 19    | 19    | 0.8           |



Open Barrel Terminals(female&male)

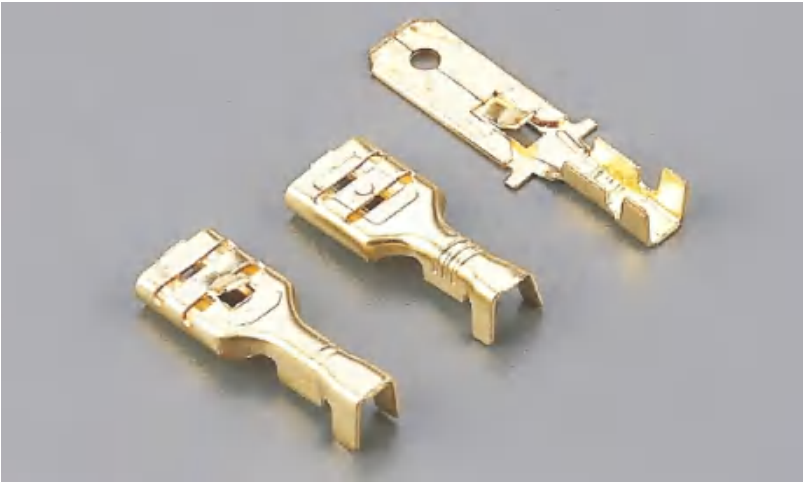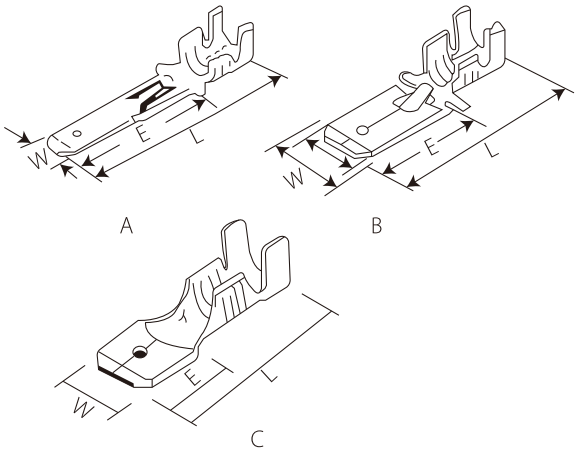

| 图<br>FIG | 编号<br>ITEM.NO. | 材质<br>METAL | 适用电线<br>RANGE | 尺寸 DIMENSION |       |       |       | 材料厚度<br>L(mm) |
|----------|----------------|-------------|---------------|--------------|-------|-------|-------|---------------|
|          |                |             |               | D(mm)        | W(mm) | L(mm) | E(mm) |               |
| A        | DJ611-2.8x0.5B | BRASS       | 1.0-1.5       | /            | 2.8   | 21    | 12    | 0.5           |
| B        | DJ611-6.3A     | BRASS       | 0.5-0.8       | 7.9          | 6.3   | 25    | 13.8  | 0.4           |
| B        | DJ611-6.3B     | BRASS       | 1.0-1.5       | 7.9          | 6.3   | 25    | 13.8  | 0.4           |
| B        | DJ612-6.3C     | BRASS       | 2.0-2.5       | 7.9          | 6.3   | 25    | 13.8  | 0.4           |
| C        | DJ617-6.3B     | BRASS       | 1.0-1.5       | /            | 6.3   | 19.2  | /     | 0.4           |


Open Barrel Terminals(female&male)

Open Barrel Terminals(female&male)

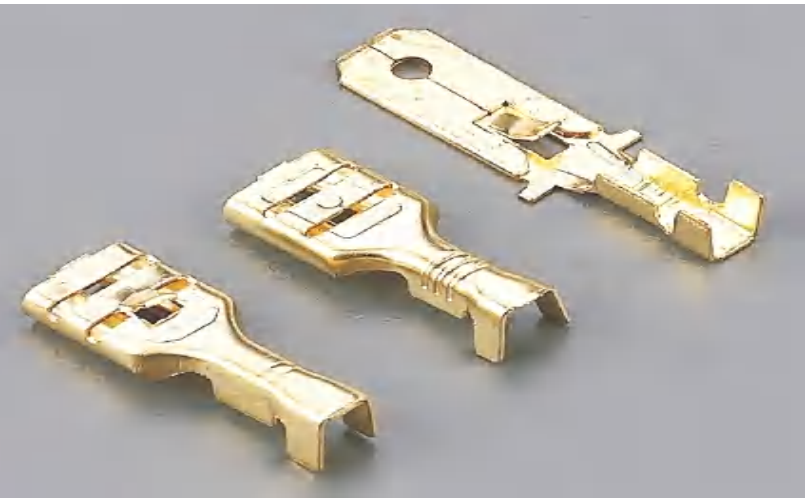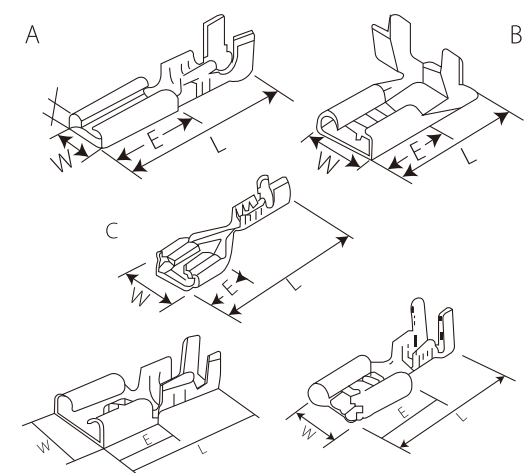

| 图<br>FIG | 编号<br>ITEM.NO.  | 材质<br>METAL | 适用电线<br>RANGE | 尺寸 DIMENSION |       |       | 材料厚度 |
|----------|-----------------|-------------|---------------|--------------|-------|-------|------|
|          |                 |             |               | W(mm)        | L(mm) | E(mm) |      |
| A        | DJ621-E2.8x0.5B | BRASS       | 1.0-1.5       | 4.1          | 16    | 6.6   | 0.3  |
| A        | DJ621-D2.8x0.5A | BRASS       | 0.5-0.8       | 3.7          | 15.1  | 6.3   | 0.25 |
| A        | DJ621-E4.8x0.5A | BRASS       | 0.5-0.8       | 6            | 13.8  | 6.4   | 0.3  |
| B        | DJ625-4.8x0.8A  | BRASS       | 0.5-0.8       | 6.4          | 12    | 6.2   | 0.4  |
| C        | DJ621-5A        | BRASS       | 0.5-0.8       | 5.2          | 17    | 5.5   | 0.3  |
| C        | DJ621-5B        | BRASS       | 1.0-1.5       | 5.2          | 17    | 5.5   | 0.3  |
| D        | DJ622-A6.3B     | BRASS       | 1.0-1.5       | 7.7          | 18.5  | 7.5   | 0.4  |
| E        | DJ622-D6.3B     | BRASS       | 1.0-1.5       | 7.7          | 17.5  | 7.5   | 0.4  |

Open Barrel Terminals(female&male)

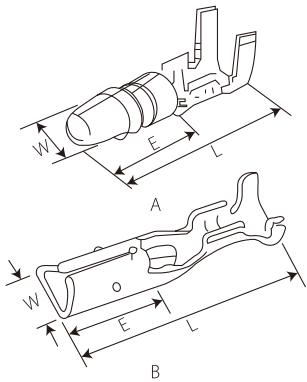

| 图<br>FIG | 编号<br>ITEM.NO. | 材质<br>METAL | 适用电线<br>RANGE | 尺寸 DIMENSION |       |       | 材料厚度 |
|----------|----------------|-------------|---------------|--------------|-------|-------|------|
|          |                |             |               | W(mm)        | L(mm) | E(mm) |      |
| A        | DJ211-3.5B     | BRASS       | 1.0-1.5       | 3.5          | 15    | 9.5   | 0.5  |
| A        | DJ211-4B       | BRASS       | 1.0-1.5       | 4            | 16    | 9.5   | 0.5  |
| B        | DJ221-2.3B     | BRASS       | 1.0-1.5       | 3.9          | 19    | 7.4   | 0.3  |
| B        | DJ221-3.5B     | BRASS       | 1.0-1.5       | 3.3          | 17.6  | 6.5   | 0.3  |
| B        | DJ221-4B       | BRASS       | 1.0-1.5       | 3.8          | 17.6  | 6.5   | 0.4  |

SZS Tools

SZS-30J

适用于预绝缘端子及全绝缘中间接头  
压线规格：0.5-6mm<sup>2</sup>  
Suitable for pre-insulation terminal and full insulation mediate connector  
Cable Range:0.5-6mm<sup>2</sup>

LY-03C/SZS-03C

适用于预绝缘端子及全绝缘中间接头  
压线规格：0.5-6mm<sup>2</sup>  
Suitable for pre-insulation terminal and full insulation mediate connector  
Cable Range:0.5-6mm<sup>2</sup>

SZS-0725

适用于预绝缘端子及全绝缘中间接头  
压线规格：0.5-2.5mm<sup>2</sup>  
Suitable for pre-insulation terminal and full insulation mediate connector  
Cable Range:0.5-2.5mm<sup>2</sup>

SN-02C

适用于预绝缘端子及全绝缘中间接头  
压线规格：0.25-2.5mm<sup>2</sup>  
Suitable for pre-insulation terminal and full insulation mediate connector  
Cable Range:0.25-2.5mm<sup>2</sup>

SZS-0325

适用于裸端子  
压线规格：0.5-2.5mm<sup>2</sup>  
For non-insulated terminal  
Cable Range:0.5-2.5mm<sup>2</sup>

SN-02

适用于裸端子  
压线规格：0.25-2.5mm<sup>2</sup>  
For non-insulated terminal  
Cable Range:0.25-2.5mm<sup>2</sup>

SZS-101

适用于裸端子及压线帽  
压线规格：1.0-10mm<sup>2</sup>  
For non-insulated terminal and wire jionts  
Cable Range:1.0-10mm<sup>2</sup>

SZS-103/LY13C

适用于压线帽  
压线规格：0.5-6mm<sup>2</sup>  
For wire jionts  
Cable Range:0.5-6mm<sup>2</sup>



## SZS Tools

### SZS-03B



适用于插簧及连接端头  
压线规格: 1.5-6mm<sup>2</sup>  
For open barrel terminals (female & male)  
Cable Range: 1.5-6mm<sup>2</sup>



### SZS-11011



适用于插簧及连接端头  
For open barrel terminals  
(female & male)



### SZS-04WF



适用于管形预绝缘端头  
压线规格: 1.0-6mm<sup>2</sup>  
Suitable for insulation cord end terminals  
Cable Range: 1.0-6mm<sup>2</sup>



### SZSC8 6-4 0.08-6mm<sup>2</sup> SZSC8 6-6 0.25-6mm<sup>2</sup>



适用于管形预绝缘端头  
Suitable for insulation cord end terminals



### SZS-05WF 0.5-6mm<sup>2</sup> SZS-06WF 0.25-6mm<sup>2</sup> SZS-16WF 6-6mm<sup>2</sup>



适用于管形预绝缘端头  
Suitable for insulation cord end terminals



### SN-05WF 0.5-4mm<sup>2</sup> SN-16WF 6-16mm<sup>2</sup>



适用于管形预绝缘端头  
Suitable for insulation cord end terminals



### SZS-26TW



适用于管型预绝缘端头  
压线规格: 0.5-6mm<sup>2</sup>  
Suitable for tube type pre-insulation terminal  
Cable Range: 0.5-6mm<sup>2</sup>



### SZS-35WF



适用于管型预绝缘端头  
压线规格: 10-35mm<sup>2</sup>  
Suitable for tube type pre-insulation terminal  
Cable Range: 10-35mm<sup>2</sup>



## SZS Tools

### SZS-8 1.25-8mm<sup>2</sup> SZS-14 5.5-14mm<sup>2</sup> SZS-16 1.25-16mm<sup>2</sup>



适用于裸端头  
Suitable for non-insulated terminal




### SZS-22 5.5-25mm<sup>2</sup> SZS-38 5.5-38mm<sup>2</sup>



适用于裸端头  
Suitable for non-insulated terminal



### HX-50B 6-50mm<sup>2</sup> HX-120B 10-120mm<sup>2</sup> HX-150B 25-150mm<sup>2</sup> HX-245B 70-240mm<sup>2</sup>

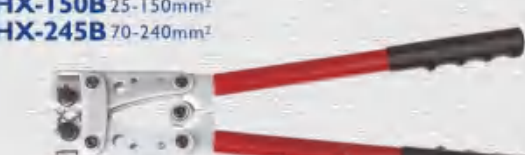

适用于窠口铜接端头  
Suitable for copper tube terminals  
/cable lugs



### CT-150



适用于窠口铜接端头  
压线规格: 16-150mm<sup>2</sup>  
Suitable for copper tube terminals/cable lugs  
Cable Range: 16-150mm<sup>2</sup>



### SZS-1040 8-16mm<sup>2</sup> SZS-1041 0.9-6mm<sup>2</sup> SZS-1042 0.2-1.25mm<sup>2</sup> SZS-1043 0.25-0.65mm<sup>2</sup>



适用于剥电线、剪线及压接裸端头  
Suitable for wire-peeling wire cutting and  
wire combining terminal


### SZS-700A 0.5-2mm<sup>2</sup> SZS-700B 1.0-3.2mm<sup>2</sup>



WIRE STRIPPER

适用于剥电线  
Suitable for peeling a wire

### LK-125 Max 125mm<sup>2</sup> LK-250 Max 250mm<sup>2</sup> LK-500 Max 500mm<sup>2</sup>

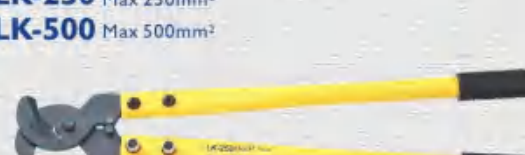

适用于剪电缆线钳  
Suitable for cutting copper  
and aluminum cable

### SZS-325A Max 240mm<sup>2</sup> SZS-520A Max 400mm<sup>2</sup>



适用于剪电缆线钳  
Suitable for cable pincer